


DuPont™ Cyrel® FAST Promo Pouch

With the objective to develop a high-quality print product that showcases **DuPont™ Cyrel® EASY platform**, our teams and partners developed this printed sample with a graphically appealing look to capture color saturation where best-in-class technology was applied and to be interactive for you to visually inspect and measure the benefits.

Including all the latest technologies in pre-press, plates and equipment, this pouch bag was printed with **Cyrel® EASY FAST plates, EASY BRITE Screens and processed in the DuPont™ Cyrel® FAST 2000 TD** at 200 lpi to demonstrate that you can have a true just in time (JIT) sustainable platemaking operation, without sacrificing your print quality.

Take a deeper look at your printed sample!

Micro-text **screened** below wood table image

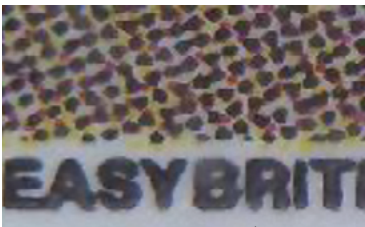

Micro-text **unscreened** below wood table




Screened side (bottom)



Unscreened side (top)




...Freshen up your printing

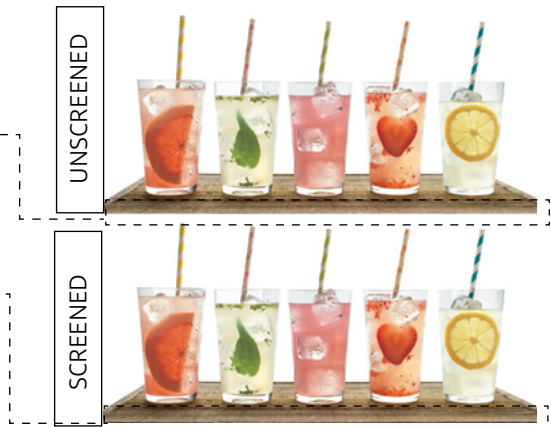

DuPont™ Cyrel® EASY Platform

- **DuPont™ Cyrel® FAST 2000TD**
- **True Just in Time (JIT)** Platemaking - puts the plate at press side
- **Sustainability** without sacrificing quality
- **Cyrel® EASY Plates** - built-in flat top dot increases pressroom productivity and print quality
- **EASY BRITE Screens** - cost savings enable less ink usage
- FAST Technology Global Market Acceptance
- **World Class technical support**
- 1,500 FAST processors installed.

View and measure the difference ...

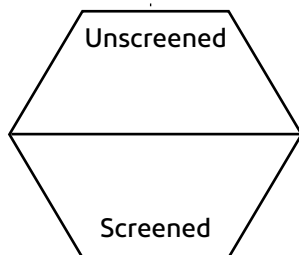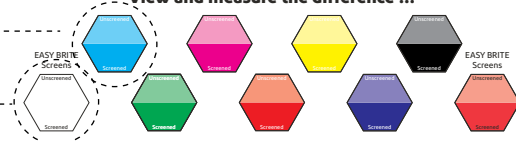

Upper side of the hexagons are unscreened, while bottom side is screened with EASY BRITE Screens and printed with 6bcm aniloxes.

In the **bottom** side, you can see text more defined and the background white with less mottle.

DuPont™ Cyrel® FAST Promo Pouch

Spec Sheet

Pre-press & Pressroom Parameters Print Results

- Cyrel® EFX 067 Plates
- DuPont™ Cyrel® EASY BRITE Screens
- ESKO Crystal Screening
- ESKO XPS Exposure frame
- DuPont™ Cyrel® FAST 2000 TD Processor

Screening

- All screened image areas are Crystal screened backed by white screened with NP1 EASY BRITE screen
- Non-screened areas are void of any screening
- Crystal screens CMYK, 1 point type
- Spot Red Logo, Line black and White NP1 EASY BRITE screens
- Interactive hexagons non-screened and screened
- 200LPI

Print conditions

W&H Miraflex 55" Press
Clear 48ga PET
Laminated to 4.5MIL
CAI Solvent inks
Reverse print
700FPM

C – 1100 2.5 VISC 24 seconds, density 1.5-1.55 target 1.5 3M 1920 mounting tape

M – 1100 2.5 VISC 24 seconds, density 1.40-1.50 target 1.45 3M 1920 mounting tape

Y – 1100 2.5 VISC 24 seconds, density 1.10-1.15 target 1.10 3M 1920 mounting tape

K – 1100 2.5 VISC 23 seconds, density 1.60-1.70 target 1.65 3M 1920 mounting tape

Line black – 550 5.0 VISC 26 seconds, 3M 1020 mounting tape

CG – 1100 2.4 VISC 25 seconds, 3M 1020 mounting tape

R – 360 6.0 VISC 25 seconds, 3M 1020 mounting tape

W1 – 360 5.0-6.0 VISC 21 seconds, opacity 54-55, 3M 1020 mounting tape

**Interested to get all these benefits?
Scan the QR code to request your sample**



No freedom from infringement of any patent or trademark owned by DuPont or others is to be inferred. Because use conditions and applicable laws may differ from one location to another and may change with time, Customer is responsible for determining whether products and the information in this document are appropriate for Customer's use and for ensuring that Customer's workplace and disposal practices are in compliance with applicable laws and other government enactments. The product shown in this literature may not be available for sale and/or available in all geographies where DuPont is represented. The claims made may not have been approved for use in all countries. DuPont assumes no obligation or liability for the information in this document. References to "DuPont" or the "Company" mean the DuPont legal entity selling the products to Customer unless otherwise expressly noted. NO WARRANTIES ARE GIVEN; ALL IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE ARE EXPRESSLY EXCLUDED.