

DuPont™ Vespel® CP-0664 Composite Coating

Extends Repair Time Intervals and Helps Improve Fan Blade Performance

Application

Turbofan jet engine designs utilize single-stage fan blades to introduce air mass flow into compressors. Fan blade materials of construction have evolved over time, from metallic to composites to hybrids. Regardless of the material of construction, one of the biggest challenges is to consistently seat the fan blade root in a predictable and controlled manner.

Challenges

- Balance of a fan blade is an extremely important condition at startup as well as in operation. Due to the high rotational speeds and the mass of materials, any imbalance could seriously impact operation.
- Controlled and predictable fan blade root “seating” at start-up is critical to performance
- Fan blade root coatings must hold up to repeated high load impacts to avoid excessive damage and wear to root and mating surfaces
- Fan blade roots may be treated to prevent galvanic and crevice corrosion from occurring at the interface of dissimilar materials
- Legacy coating systems may not always be easily maintained in the field, thus negatively impacting repair times as well as cost
- Large components such as fan blades are susceptible to damage during assembly

Solution

- DuPont™ Vespel® CP-0664 is a unique composite fabric coating used in a variety of aerospace applications
- Vespel® CP-0664 can be pre-formed to both 2D and 3D geometries for bonding to critical surfaces (Figure 1)
- Pre-formed Vespel® CP-0664 allows designers to precisely locate and optimize contact surfaces (Figure 1)
- DuPont™ Vespel® CP-0664 allows for controlled, predictable, and consistent friction performance during blade root seating
- Composite fabric provides low friction and durable coating to various surfaces while preventing corrosion and damage during assembly

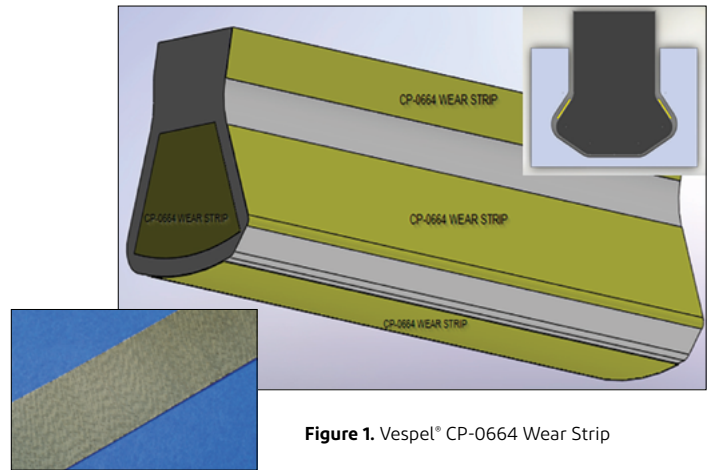


Figure 1. Vespel® CP-0664 Wear Strip

Features and Benefits

Low friction

PTFE fibers enhance friction performance, dropping the dynamic coefficient of friction below 0.15. Higher loads only improve frictional behavior (Figure 2).

Wear resistance

Vespel® CP-0664 parts have seen extensive use in jet engine fans and nacelles and proven itself with years of service. Wear testing has been conducted over a variety of test conditions and proven to survive from 7,500 to more than 250,000 cycles. A transfer film is created on the mating metal surface which minimizes the wear on both the metal and composite surfaces (Figure 3).

Shear strength/impact resistance/durability

Vespel® CP-0664 was subjected to 70 impacts with a dynamic load of 150 lbf with no visible damage to material or mating components and at performing loads exceeding 30 ksi.

Corrosion resistance

Vespel® CP-0664 has unique composite construction that creates an insulating barrier between dissimilar mating metal surfaces.


Design flexibility

Material can be molded to match unique geometry of most complex designs. Parts can be easily bonded at initial assembly or in the field.

Protects expensive components from wear, helps extend life

Many coatings are brittle, and can be easily damaged in use, or experience corrosion with exposure to normal environmental conditions. DuPont™ Vespel® CP-0664 has demonstrated ability to protect larger engine components as well as fan blade roots from damage that can lead to costly repairs and removal of engines from service.

Figure 2: DuPont™ Vespel® CP-0664 Coefficient of Friction

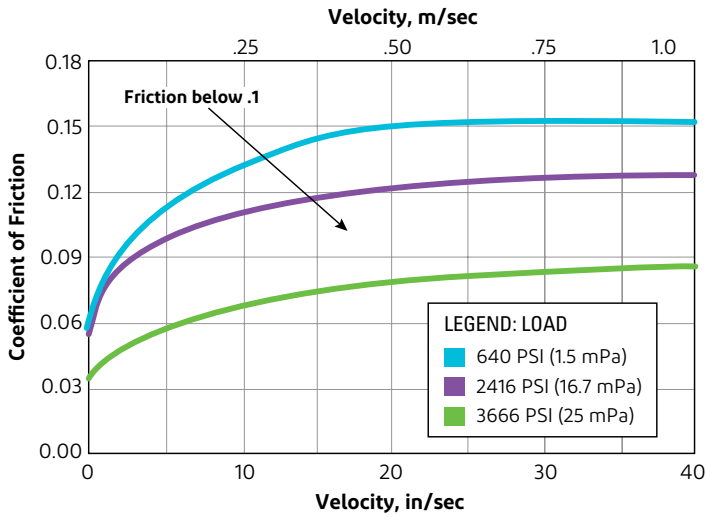

Solving a variety of problems

Vespel® CP-0664 has been used to solve a variety of problems. From v-grooves, fan blade roots, and door/cowl guides to track liners on thrust reversers. The versatility and durability allows you to think out of the box to solve wear and coating problems that are leading to costly repairs on major components.

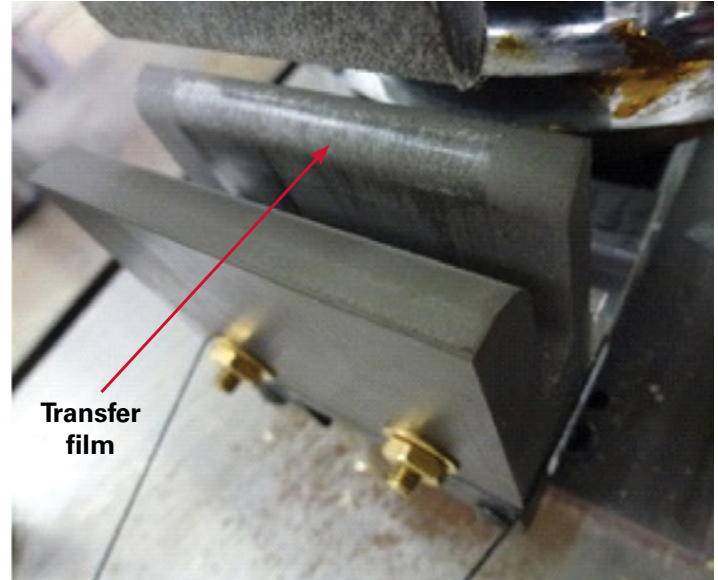


Figure 3. Impact/wear test fixture with transfer film on mating surface that reduces friction and enhances durability

Visit us at vespel.com

The information set forth herein is furnished free of charge, is based on technical data that DuPont believes to be reliable and represents typical values that fall within the normal range of properties. This information relates only to the specific material designated and may not be valid for such material used in combination with other materials or in other processes. It is intended for use by persons having technical skill, at their own discretion and risk. This information should not be used to establish specification limits nor used alone as the basis of design. Handling precaution information is given with the understanding that those using it will satisfy themselves that their conditions of use present no health or safety hazards and comply with applicable law. Since conditions of product use and disposal are outside our control, we make no warranties, express or implied, and assume no liability in connection with any use of this information. As with any product, evaluation under end use conditions prior to specification is essential. Nothing herein is to be taken as a license to operate or a recommendation to infringe on patents.

CAUTION: Do not use DuPont materials in medical applications involving implantation in the human body or contact with internal body fluids or tissues unless the material has been provided from DuPont under a written contract that is consistent with the DuPont policy regarding medical applications and expressly acknowledges the contemplated use. For further information, please contact your DuPont representative.

DuPont's sole warranty is that our products will meet our standard sales specifications in effect at the time of shipment. Your exclusive remedy for breach of such warranty is limited to refund of purchase price or replacement of any product shown to be other than as warranted. TO THE FULLEST EXTENT PERMITTED BY APPLICABLE LAW, DUPONT SPECIFICALLY DISCLAIMS ANY OTHER EXPRESS OR IMPLIED WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, OR NON INFRINGEMENT. DUPONT DISCLAIMS LIABILITY FOR ANY SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES.

DuPont™, the DuPont Oval Logo, and all trademarks and service marks denoted with ™, SM or ® are owned by affiliates of DuPont de Nemours, Inc. unless otherwise noted. © 2022 DuPont. All rights reserved.



dupont.com