



**MOLYKOTE™**

# Sunroof guide lubrication with MOLYKOTE™ specialty PAO grease

*Case Study: Application-matched technology for global Tier 1 supplier*



To ensure smooth, reliable and quiet operation of sliding sunroofs and panoramic roofs in all climates worldwide, an international Tier 1 automotive supplier relies on an application-matched MOLYKOTE™ specialty polyalphaolefin (PAO) lubricant. For many years, the performance of MOLYKOTE™ brand *Smart Lubrication™* solutions has been proven in meeting requirements of numerous global and regional vehicle OEM customers, helping to maximize the comfort, convenience and safety of sliding-roof operation.

## CUSTOMER

A market-leading Tier 1 automotive supplier with extensive global design, engineering and manufacturing capabilities produces innovative sliding sunroofs and panoramic roofs for many OEM brands, meeting requirements to maximize value-added comfort, convenience and safety.

## CHALLENGE

To meet performance specifications of many global and regional vehicle OEM customers, this Tier 1 supplier needed an effective, application-matched lubricant that outperformed available options at low temperatures and ensured safer and more reliable opening and closing of its sliding-roof designs.

## SOLUTION

The sunroof manufacturer collaborated with MOLYKOTE™ – and the brand's trusted expertise, problem-solving capabilities and broad technical support – to develop an advanced specialty PAO lubricant for use on sliding-roof guides to ensure smooth, reliable and quiet operation across a wide temperature range.



Typical lubrication points for sliding-roof designs, including sunroofs and panoramic roofs.

Translucent MOLYKOTE™ PAO lubricant resists dirt buildup to provide added cleanliness and extended service life on sliding-roof guides.



## The opportunity

In developing early designs of tilt-up and sliding sunroofs for its home market and possible export, this automotive component manufacturer demonstrated a strong commitment to ensuring the highest-quality technology. White lithium greases were well-known, trusted and relatively economical lubricants for applications with sliding surfaces under heavy loads. However, none of the available options exactly met all of the performance specifications set by the sunroof design and engineering teams.

Trust in the MOLYKOTE™ brand – and our specialty lubrication expertise, problem-solving capabilities for specific applications, broad technical support and ability to meet global supply requirements – led this global Tier 1 supplier to seek our help.

## The challenge

An application-matched lubrication technology that could deliver consistently low friction was needed to ensure proper opening and closing forces across a range of sliding-roof designs. Low-temperature performance was a critical design parameter. And other key requirements added to the development challenge: The *Smart Lubrication*™ solution also needed to address priorities such as a clean appearance, reduced noise, safety for vehicle occupants, compatibility with plastic materials, durability for extended service, and design flexibility for larger and more complex sliding roofs in the future.

Close collaboration between the sunroof design engineers and MOLYKOTE™ application engineering and technical support (AETS) specialists – in our development and testing labs as well as in sunroof production plants for different markets – was essential.

## The solution

The specific MOLYKOTE™ PAO grease first developed for basic sunroof designs has grown in step with the manufacturer. Starting in the manufacturer's home market and then expanding into other geographies, this MOLYKOTE™ brand *Smart Lubrication*™ solution is now maximizing functionality and comfort in all types of sunroofs, including popular panoramic roofs.


For more than two decades, as sliding roofs became an integral part of today's vehicles in many regions, the MOLYKOTE™ synthetic PAO lubricant has delivered key advantages and benefits:

- Superior performance with excellent lubrication and noise-damping capabilities
- Enhanced comfort with reduced noise, judder and vibration during sliding-roof opening and closing
- Consistent smoothness and reliability at temperatures from -45°C to 120°C (-49°F to 248°F)
- Increased safety by promoting a faster response to potential obstructions




- Good lightweighting potential with less friction and wear on different metals and resins
- Added cleanliness with low bleed, less oil separation and resistance to dirt buildup
- Extended service life with resistance to water washout, evaporation and corrosion


## Comparative performance testing

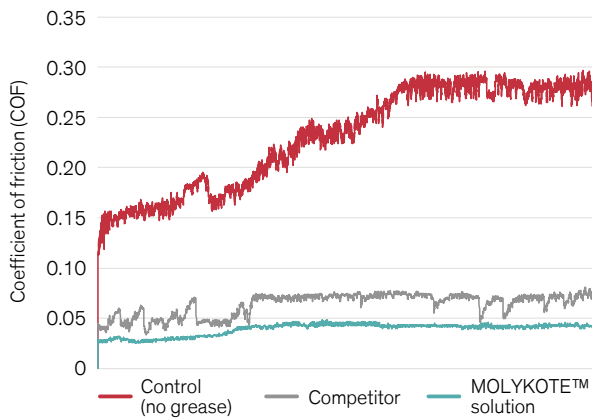


**Figure 1.** Coefficient of friction (COF) between TPEE and PP at ambient temperature, comparing the MOLYKOTE™ solution, a competitive material and a control with no lubricant

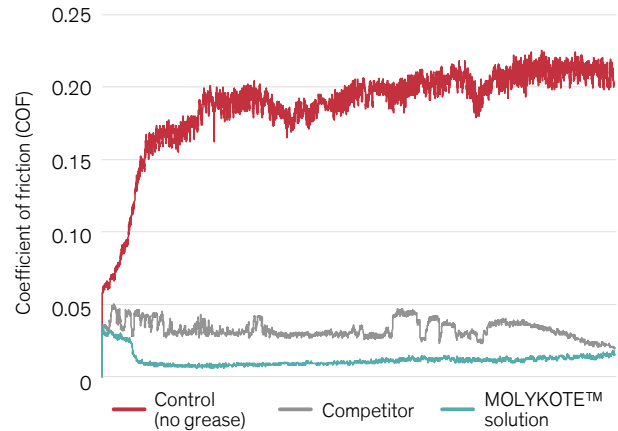


**Figure 2.** Coefficient of friction (COF) between TPEE and PP at 85°C, comparing the MOLYKOTE™ solution, a competitive material and a control with no lubricant

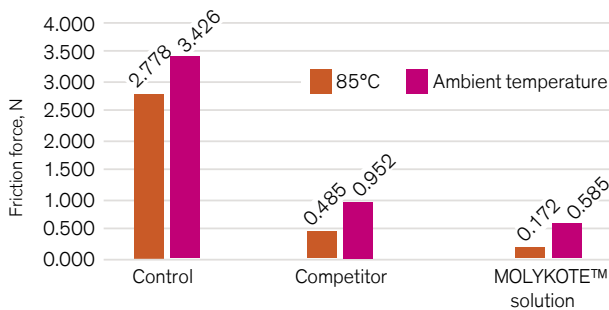

**Figure 3.** Average friction force between TPEE and PP, comparing the MOLYKOTE™ solution and a competitive material against a control with no lubricant

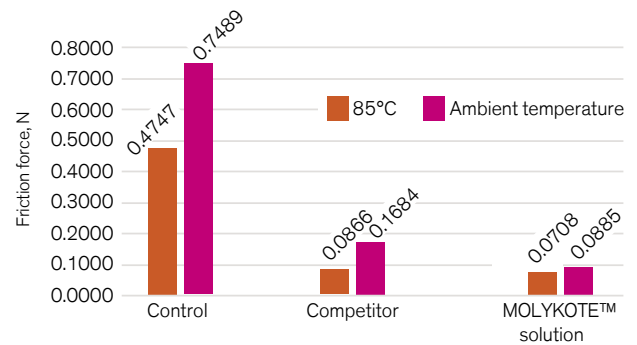

**Figure 4.** Standard deviation of friction force between TPEE and PP, comparing the MOLYKOTE™ solution and a competitive material against a control with no lubricant

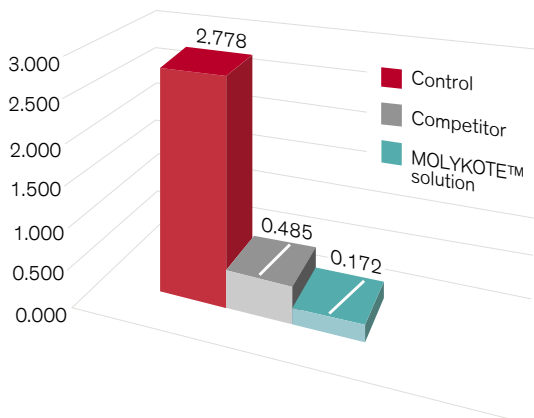

**Figure 5.** Mean friction force at 85°C, comparing the MOLYKOTE™ solution, a competitive material and a control with no lubricant

## Specialty PAO grease for North America

For high-performance lubrication of sunroofs and panoramic roofs manufactured in North America, MOLYKOTE™ G-1033 Grease offers the same consistently low friction as the proven, effective PAO lubricant technology used in international sliding-roof markets. This market-specific lubricant – a similar formulation of polyalphaolefin (PAO) oil thickened with lithium soap – ensures improved supply security, availability and cost. It delivers the same key advantages and benefits of the proven *Smart Lubrication*™ solution for meeting vehicle OEM performance specifications.

## Typical properties

Specification Writers: These values are not intended for use in preparing specifications. Please contact your local MOLYKOTE™ Sales Application Engineer or MOLYKOTE™ Customer Service before writing specifications on this product.

Test Method <sup>1</sup>	Property	MOLYKOTE™ G-1033 Grease
	Appearance	White
JIS K 2220	Penetration (worked 60 strokes)	280
	Service temperature range	-45 to 120°C
	Dropping point	210°C
JIS K 2220	Bleed (24 hours at 100°C)	2.4%
JIS K 2220	Evaporation (22 hours at 99°C)	0.2%
	Copper corrosion (24 hours at 100°C)	1b
	Water washout (1 hour at 38°C)	3.1%
ASTM D2266	Four-ball wear scar (1,200 rpm, 392 N, 1 hour)	0.58 mm
JIS K 2220	Low-temperature torque (-40°C) – Starting torque – Running torque	90 mN•m 30 mN•m

<sup>1</sup>ASTM: American Society for Testing and Materials; JIS: Japanese Industrial Standard; CTM: Corporate Test Method

## Learn more: Contact us

To learn more about using MOLYKOTE™ G-1033 Grease for guide lubrication on sunroofs and panoramic roofs – or about driving vehicle design innovation with other high-performance specialty lubricants – contact your MOLYKOTE™ technical representative or visit [www.molykote.com](http://www.molykote.com).

Images: Page 1 – dow\_43785868152, dow\_50442556404, dow\_50442554866; Page 2 – dow\_43785878881

**ANY CASE STUDIES, TESTIMONIALS, EXAMPLES AND ILLUSTRATIONS CANNOT GUARANTEE THAT THE USER WILL ACHIEVE SIMILAR RESULTS.**

### HANDLING PRECAUTIONS

PRODUCT SAFETY INFORMATION REQUIRED FOR SAFE USE IS NOT INCLUDED IN THIS DOCUMENT. BEFORE HANDLING, READ PRODUCT AND SAFETY DATA SHEETS AND CONTAINER LABELS FOR SAFE USE, PHYSICAL AND HEALTH HAZARD INFORMATION. THE SAFETY DATA SHEET IS AVAILABLE ON THE DOW WEBSITE AT [WWW.DOW.COM](http://WWW.DOW.COM), OR FROM YOUR DOW SALES APPLICATION ENGINEER, OR DISTRIBUTOR, OR BY CALLING DOW CUSTOMER SERVICE.

### LIMITED WARRANTY INFORMATION – PLEASE READ CAREFULLY

The information contained herein is offered in good faith and is believed to be accurate. However, because conditions and methods of use of our products are beyond our control, this information should not be used in substitution for customer's tests to ensure that our products are safe, effective and fully satisfactory for the intended end use. Suggestions of use shall not be taken as inducements to infringe any patent.

Dow's sole warranty is that our products will meet the sales specifications in effect at the time of shipment.

Your exclusive remedy for breach of such warranty is limited to refund of purchase price or replacement of any product shown to be other than as warranted.

**TO THE FULLEST EXTENT PERMITTED BY APPLICABLE LAW, DOW SPECIFICALLY DISCLAIMS ANY OTHER EXPRESS OR IMPLIED WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE OR MERCHANTABILITY.**

**DOW DISCLAIMS LIABILITY FOR ANY INCIDENTAL OR CONSEQUENTIAL DAMAGES.**

®™ Trademark of The Dow Chemical Company ("Dow") or an affiliated company of Dow.  
© 2018 The Dow Chemical Company. All rights reserved.  
AGP15183

Form No. 85-1006-01



**MOLYKOTE™**