

SEAL BETWEEN **DUPONT™ FLEXWRAP™**
AND WINDOW FRAME USING AN
APPROVED SEALANT


TURN UP **DUPONT™ FLEXWRAP™**
AND ADHERE TO BLOCKING

WINDOW FRAME

BACKER ROD AND SEALANT
AS AIR SEAL

SEALANT

ADHERE **DUPONT™ STRAGHTFLASH™**
TO **DUPONT™ FLEXWRAP™** AND OVER
BACK LEG OF FLASHING PAN

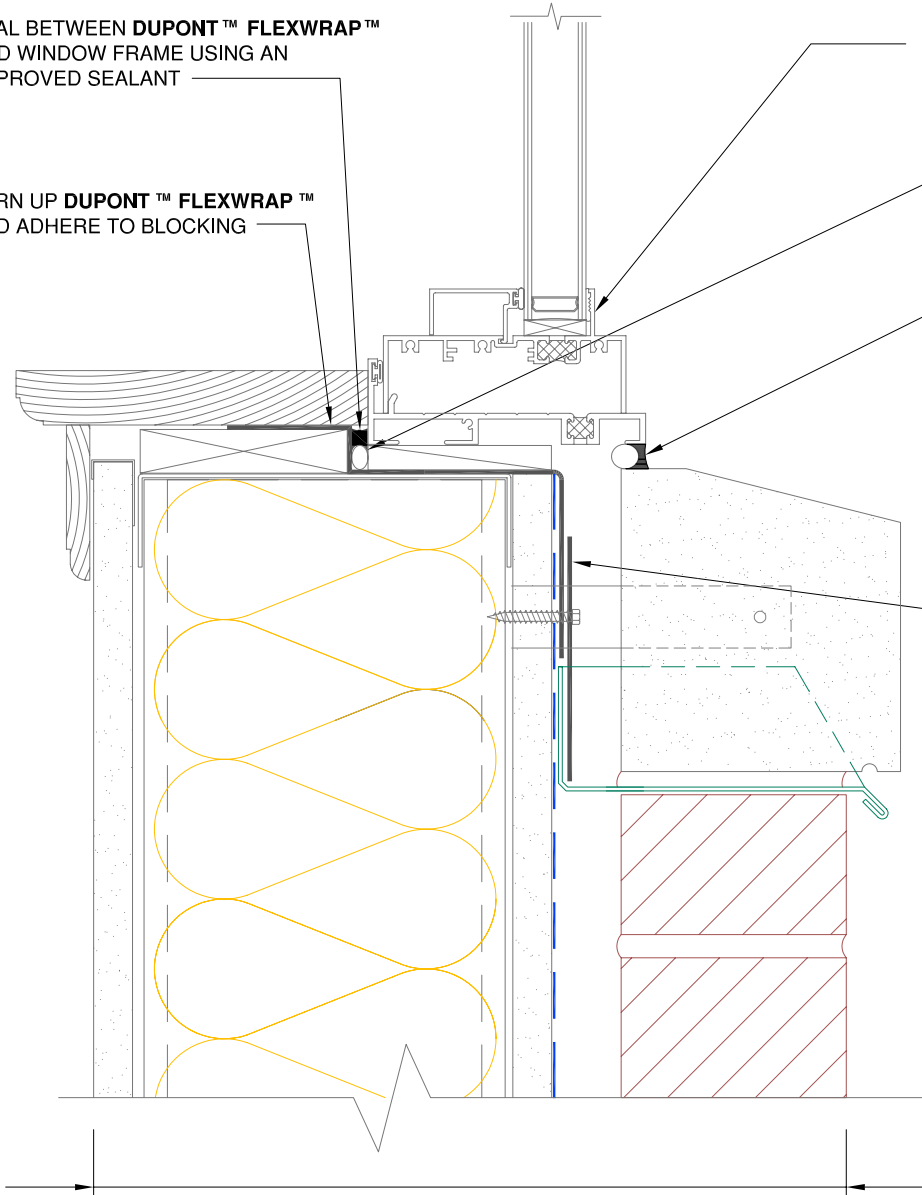

TYPICAL WALL
INTERIOR GYPSUM BOARD
STEEL STUDS W/BATT INSULATION
EXTERIOR GYPSUM BOARD
DUPONT™ TYVEK®
AIR SPACE
MASONRY VENEER

BRICK - NON FLANGED WINDOW SILL (STRAIGHTFLASH™ VF)

- SEAL ALL **DUPONT™ TYVEK®** SEAMS AND REPAIR MINOR HOLES WITH **DUPONT™ TYVEK®** TAPE.
- FASTEN **DUPONT™ TYVEK®** WITH APPROVED FASTENERS AND SPACING.
- INTERIOR VAPOR RETARDER MAY BE REQUIRED IN SOME REGIONS.
- LOCAL LAWS, ZONING, AND BUILDING CODES VARY AND THEREFORE GOVERN OVER MATERIAL SELECTION AND DETAILING SHOWN ABOVE.
- EXTERIOR INSULATION MAY BE APPLIED IN FRONT OR BEHIND **DUPONT™ TYVEK®** LAYER.



Tyvek.