

SEAL BETWEEN **DUPONT™ FLEXWRAP™** AND WINDOW FRAME USING AN APPROVED SEALANT

TURN UP **DUPONT™ FLEXWRAP™** AND ADHERE TO BLOCKING


BACKER ROD AND SEALANT AS AIR SEAL

WINDOW FRAME

SEALANT

SEAL **DUPONT™ FLEXWRAP™** TO **DUPONT™ TYVEK® STUCCOWRAP®**

TYPICAL WALL
 INTERIOR GYPSUM BOARD
 STEEL STUDS W/BATT INSULATION
 EXTERIOR GYPSUM BOARD
DUPONT™ TYVEK® STUCCOWRAP®
 RIGID INSULATION
 BASE COAT W/ EMBEDDED REINFORCING MESH
 FINISH COAT

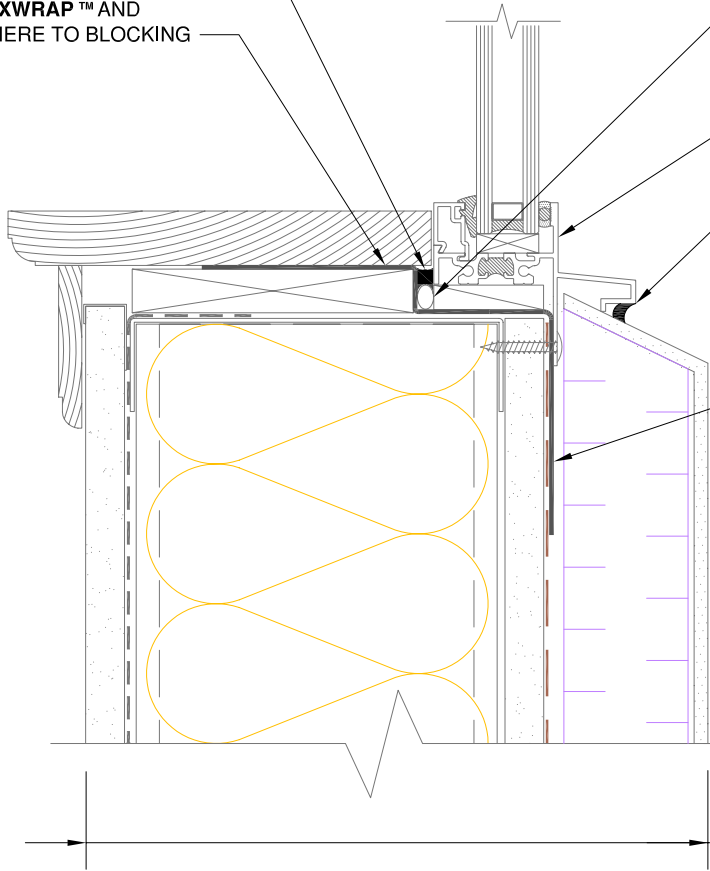

EIFS - FLANGED WINDOW SILL

- SEAL ALL **DUPONT™ TYVEK®** SEAMS AND REPAIR MINOR HOLES WITH **DUPONT™ TYVEK®** TAPE.
- FASTEN **DUPONT™ TYVEK®** WITH APPROVED FASTENERS AND SPACING.
- INTERIOR VAPOR RETARDER MAY BE REQUIRED IN SOME REGIONS.
- LOCAL LAWS, ZONING, AND BUILDING CODES VARY AND THEREFORE GOVERN OVER MATERIAL SELECTION AND DETAILING SHOWN ABOVE.



Tyvek.