




DuPont™ Cyrel® 3000 EC

State-of-the-Art Exposure



DuPont™ Cyrel® 3000 EC

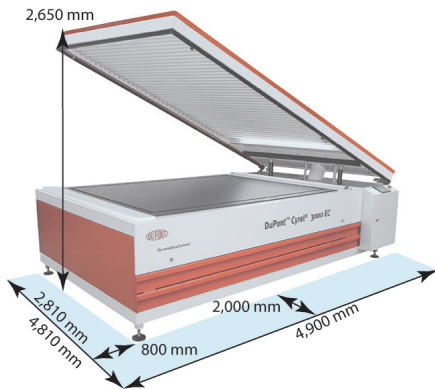

Floor Plan

DuPont Packaging Graphics continues to be a global technology leader in the development and supply of flexographic printing systems. Our R&D team continues to develop innovative new solutions to help our customers expand their business by taking advantage of new and profitable opportunities in the growing flexographic packaging market. The DuPont Packaging Graphics portfolio of products includes DuPont™ Cyrel® brand photopolymer plates (analog and digital), Cyrel® platemaking equipment, Cyrel® round sleeves, Cyrel® plate mounting systems and the revolutionary Cyrel® FAST thermal system.

DuPont™ Cyrel® Systems: Higher quality at high speed.

The DuPont™ Cyrel® 3000 EC is designed with customer needs in mind; it is easy to install, support, maintain and operate. It is robust, extremely cost effective and reliable.

Benefits

- Maximum plate size 52" x 80" (1,320 x 2,030 mm)
- Clamshell design
- Anodized temperature controlled exposure bed
- Light integrator controlled exposure
- Outstanding vacuum draw down
- Optimum productivity

Product Features

DuPont™ Cyrel® 3000 EC exposes high quality photopolymer plates up to a format of 52" x 80" (1,320 x 2,030 mm).

The clamshell design holds 48 UV-A fluorescent tubes with built-in reflectors. One yellow control tube illuminates the exposure bed for inspecting of the plate surface. Unique to this exposure unit is the anodized temperature controlled bed, closed loop system that controls the exposure bed temperature, which translates into predictable and consistent exposures. The unit is fitted with a light integrator that compensates for the decrease in light output as the tubes age. To meet the demanding needs of high quality plates the user can easily customize the 25 basic exposure set-ups.

Each tube is constantly monitored by a photo-sensor. If the light emission of one or more tubes decreases below a set point, the user is alerted. There is a counter imbedded in the PLC to keep track of the number of hours the UV-A tubes have been in operation.



Download latest version



DuPont™ Cyrel® 3000 EC

State-of-the-Art Exposure

Technical Data		
General	Details	Other Notes
Equipment Name	DuPont™ Cyrel® 3000 EC	Cooled exposure, Clam shell
SAP Article Number	D13290547	
Plate Thickness	0.019" to 0.27"	0.5 mm to 7.0 mm
Max. Nominal Plate Width	52" (1,320 mm)	
Max. Nominal Plate Length	80" (2,030 mm)	
UV-A Tubes Wave Length	360 nm – 380 nm	48 tubes
UV-C Tubes Wave Length	NA	
Electrical (Field Configurable)	370 / 440 Volt – 50 / 60 hz 208 / 240 Volt – 50 / 60 hz	3Ph / N / PE 3Ph / PE
Power (nominal)	10 kW	
Current (Nominal Load)	16 Amp @ 400 Volt 27 Amp @ 230 Volt	
Connecting Wires	400 Volt configuration 230 Volt configuration	5 x 10 mm ² 4 x 10 mm ²
Exhaust (Light Finisher)	NA	
Environmental Data	Temperature range: 63°F to 82°F (17°C to 28°C)	Relative humidity from 20% to 85% non-condensing
Compressed Air Supply	7 bar minimum	
Dimensions	Uncrated L 83.1" (2,110 mm) W 129.9" (3,300 mm) H 79.4" (2,015 mm) H - open 104.3" (2,650 mm)	Crated 90.6" (2,310 mm) 141.0" (3,580 mm) 91.0" (2,430 mm)
Weight	4,101 lbs (1,860 kg)	5,203 lbs (2,360 kg)
Color	DuPont Grey & DuPont Red	

For more information on DuPont™ Cyrel® or other DuPont Packaging Graphics products, please contact your local representative:

United States

DuPont Packaging Graphics
Chestnut Run Plaza, Bldg. 702
974 Centre Road
Wilmington, DE 19805
800-345-9999

Canada

DuPont Packaging Graphics
1919 Minnesota Court
Mississauga, ON L5N 0C9
Canada
905-816-3238

www.cyrel.com/na

© 2013 DuPont. All rights reserved. The DuPont Oval Logo, DuPont™ and Cyrel® are registered trademarks or trademarks of E.I. du Pont de Nemours and Company or its affiliates. All technical information set out herein is provided free of charge and is based on technical data, which DuPont believes to be reliable. It is intended for use by persons having skill, at their own discretion and risk. The handling precaution information contained herein is given with the understanding that those using it will satisfy themselves that their particular conditions of use present no health or safety hazards. Since conditions of product use are outside of our control we make no warranties express or implied in relation thereto and therefore cannot accept any liability in connection with any use of this information. Nothing herein is to be taken as a license to operate under, or a recommendation to infringe any patents.