



DuPont™ Cyrel® DigiFlow 2000 ECLF

State-of-the-Art Exposure Unit




DuPont Packaging Graphics continues to be a global technology leader in the development and supply of flexographic printing systems. Our R&D team continues to develop innovative new solutions to help our customers expand their business by taking advantage of new and profitable opportunities in the growing flexographic packaging market. The DuPont Packaging Graphics portfolio of products includes DuPont™ Cyrel® brand photopolymer plates (analog and digital), Cyrel® platemaking equipment, Cyrel® round sleeves, Cyrel® plate mounting systems and the revolutionary Cyrel® FAST thermal system.

DuPont™ Cyrel® Systems: Higher quality at high speed.

DuPont™ Cyrel® DigiFlow 2000 ECLF

The DuPont™ Cyrel® DigiFlow 2000 ECLF is designed with customer needs in mind; it is easy to install, support, maintain and operate. It is robust, extremely cost effective and reliable.

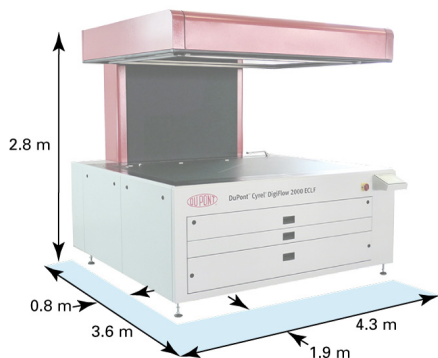

Floor Plan

Benefits

- Maximum plate size 42" x 60" (1,070 x 1,530 mm)
- Top lift design
- High power UV-A fluorescent tubes
- Individual lamp sensor measurement tool
- Exposure in standard digital dot mode or DigiFlow mode
- Optimized temperature controlled exposure bed
- Optimum productivity

Product Features

DuPont™ Cyrel® DigiFlow 2000 ECLF exposes high quality photopolymer plates up to a format of 42" x 60" (1,070 x 1,530 mm).

Unique to this exposure unit is the high power UV-A output with variable intensity level controls. In addition, it includes the DigiFlow mode; a controlled exposure environment designed to produce the exact 1:1 reproduction that is necessary to optimise solid screening programs for enhanced solid ink density.

The vertical lift exposure lid allows easy and convenient access to the cooled exposure bed. The unit is configured with 34 UV-A high power fluorescent tubes with built-in reflectors and includes a new lamp sensor measurement tool for easy calibration. The DigiFlow 2000 ECLF also includes an optimized temperature controlled bed, including a closed loop system to monitor and control exposure bed temperature for predictable and consistent exposures. A built-in light integrator ensures consistent exposure throughout the life of the lamps. The unit is controlled through a digital touch pad with over 50 different exposure set-ups which can be stored for quick and easy recall.



Download latest version



DuPont™ Cyrel® DigiFlow 2000 ECLF

State-of-the-Art Exposure Unit

Technical Data		
General	Details	Other Notes
Equipment Name	DuPont™ Cyrel® DigiFlow 2000 ECLF	
SAP Article Number	D15093072	
Plate Thickness	0.019" to 0.27"	0.5 mm to 7.0 mm
Max. Nominal Plate Width	42" (1,070 mm)	
Max. Nominal Plate Length	60" (1,530 mm)	
UV-A Tubes Wave Length Peak	364 nm	With reflector
UV-C Tubes Wave Length Peak	250 nm	
Electrical (Field Configurable)	360 / 440 Volt – 50 / 60 hz 207 / 243 Volt – 50 / 60 hz	3Ph / N / PE 3Ph / PE
Power (nominal)	21 kW	
Current (Nominal Load)	33.5 Amp @ 400 Volt / 230 Volt	
Connecting Wires	400 Volt configuration 230 Volt configuration	5 x 6 mm ²
Grounding	≤ 0.1 Ω	
Environmental Data	Temperature range: 63°F to 80.6°F (17°C to 28°C)	Relative humidity from 10% to 80% non-condensing
Compressed Air Supply	6–10 bar	200 l / min. Pressure dew point 3°C, max. residual intake oil content of ≤0.01 mg/m ³
Dimensions	Uncrated L 90.7" (2,304 mm) W 80.2" (2,039 mm) H 83.5" (2,120 mm)	Crated 126.0" (3,200 mm) 86.6" (2,200 mm) 99.7" (2,533 mm)
Weight	3,659.7 lbs (1660 kg)	4,850.2 lbs (2,200 kg)
Color	DuPont Grey & DuPont Red	

For more information on DuPont™ Cyrel® or other DuPont Packaging Graphics products, please contact your local representative:

United States

DuPont Packaging Graphics
Chestnut Run Plaza, Bldg. 702
974 Centre Road
Wilmington, DE 19805
800-345-9999

Canada

DuPont Packaging Graphics
1919 Minnesota Court
Mississauga, ON L5N 0C9
Canada
905-816-3238

www.cyrel.com/na

© 2014 DuPont. All rights reserved. The DuPont Oval Logo, DuPont™ and Cyrel® are registered trademarks or trademarks of E.I. du Pont de Nemours and Company or its affiliates. All technical information set out herein is provided free of charge and is based on technical data, which DuPont believes to be reliable. It is intended for use by persons having skill, at their own discretion and risk. The handling precaution information contained herein is given with the understanding that those using it will satisfy themselves that their particular conditions of use present no health or safety hazards. Since conditions of product use are outside of our control we make no warranties express or implied in relation thereto and therefore cannot accept any liability in connection with any use of this information. Nothing herein is to be taken as a license to operate under, or a recommendation to infringe any patents.