

# DuPont™ Kapton® FCR

## ADVANCED MAGNET WIRE INSULATION

### For Improved Motor and Generator Performance



Kapton® FCR is a state-of-the-art wire insulation that will withstand corona discharge while delivering improved long term performance, cost effectively.

Motors and generators insulated with Kapton® FCR can deliver improved service life and operational efficiency versus conventional insulation. Kapton® FCR can handle many of the factors that lead to early failure, such as thermal upsets and partial discharge.

As energy costs increase, improved motor insulation efficiency can provide a direct payoff to the motor or generator operator. The cost of an early failure can far outweigh the cost of using the best available wire insulation in manufacturing or rewinding the motor.

**DuPont™ Kapton® FCR will conform tightly to shaped conductors, providing an even distribution of insulation, even on the edges. This eliminates the thinning of the insulation on the edges as is commonly found on enameled wire.**




*The miracles of science™*

## Benefits

- Reduces life cycle cost
- Provides increased durability and longer life
- Allows use of thinner insulation where space is at a premium

## PULSE ENDURANCE

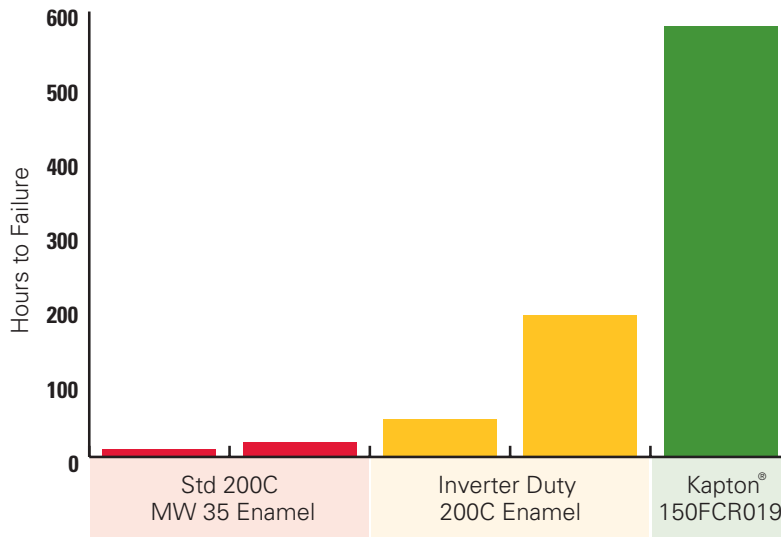


**Table 1. In pulse endurance testing, Kapton® FCR film showed superior performance when compared with other insulations.**

Commercial Insulation on 18 AWG Wire

## Applications

- Large industrial motors
- Traction motors
- Generators

## KAPTON® FCR HAS PROVEN TO BE THE INSULATION

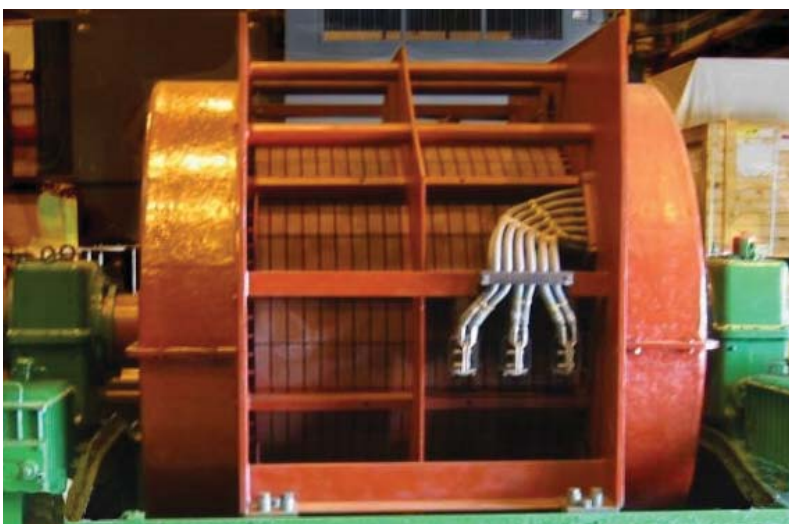

### Large Industrial Motors:

American Electric Power has commissioned the rebuilding of 13.2kV fan motors with wire insulated with Kapton® FCR. Kapton® FCR has delivered reduced life cycle costs and improved life expectancy to AEP.



### Traction Motors:

The European rail industry adopted Kapton® FCR to improve the efficiency and durability of high-speed locomotives. This system replaced traditional insulation systems.

- Withstands continuous exposure to temperatures as high as 240°C
- Forms strong bond to magnet wire
- Delivers superior corona resistance under extreme conditions



If you are working with tight clearances, the extremely high insulation resistance provided by Kapton® allows the use of a thinner insulation and provides the space needed for a successful rewind.

## OF CHOICE FOR A WIDE RANGE OF APPLICATIONS.



and Kapton® FCR in the mid-1990's to replace the insulation on a number of AC traction motors on its fleet. Kapton® FCR has significantly outperformed



### Generators:

The Smith Mountain hydroelectric facility near Roanoke Virginia decided to up-date the capacity of one of its severe duty, 101,500 HP, 69MVA motor-generators. Because of its higher corona resistance & dielectric performance Kapton® FCR was chosen to replace the conventional insulation. The superior, thinner strand insulation provides improved efficiency and capacity and excellent long-term reliability.

*(Coils Manufactured by National Electric Coil)*

**For more information on DuPont™ Kapton® or other High Performance Materials, please contact your local representative:**

**Americas:**

DuPont High Performance Materials  
U.S. Rt. 23 & DuPont Road  
Circleville, OH 43113  
Tel: 800-967-5607

**DuPont Canada**

P.O. 2200  
Streetsville, Ontario,  
Canada L5M 2H3  
Tel: 800-784-5231

**DuPont do Brasil, S.A.**

Al. Itapecuru, 506-Alphaville  
06454-080, Barueri, SP, Brasil  
Tel: 55-11-4166-8640

**Europe:**

DuPont de Nemours (Luxembourg) S.A.R.L.  
Rue General Patton  
L-2984 Luxembourg  
Tel: 352-3666-5935

**Asia Pacific:**

DuPont Singapore PTE Ltd.  
1 Maritime Square #07-01  
World Trade Center  
Singapore 099253  
Tel: 65-279-3527

**E.I. DuPont India Private Ltd.**

701-724/B Bonanza  
Sahar Plaza Complex  
Andheri Durla Road, Andheri East  
Mumbai 400 059, India  
Tel: 91-22-28393960

**DuPont China Holding Co., Ltd.**

Unit 1101, China World Tower 2  
No. 1 Jianguomen Wai Avenue  
Beijing, 100004 China  
Tel: 86-21-63866366-2720

Copyright © 2006 DuPont or its affiliates. All rights reserved. The DuPont Oval, DuPont™, The miracles of science™ and Kapton® are registered trademarks or trademarks of E.I. du Pont de Nemours and Company or its affiliates.

NO PART OF THIS MATERIAL MAY BE REPRODUCED, STORED IN A RETRIEVAL SYSTEM OR TRANSMITTED IN ANY FORM OR BY ANY MEANS ELECTRONIC, MECHANICAL, PHOTOCOPYING, RECORDING OR OTHERWISE WITHOUT THE PRIOR WRITTEN PERMISSION OF DUPONT.

Caution: Do not use in medical applications involving permanent implantation in the human body, or contact with internal body fluids or tissues. For other medical applications, see "DuPont Medical Caution Statement," H-50102.

This information is based on data believed to be reliable, but DuPont makes no warranties, express or implied, as to its accuracy and assumes no liability arising out of its use. The data listed herein falls within the normal range of product properties but should not be used to establish specification limits or used alone as the basis of design. Because DuPont cannot anticipate or control the many different conditions under which this information and/or product may be used, it does not guarantee the usefulness of the information or the suitability of its products in any given application. Users should conduct their own tests to determine the appropriateness of the product for their particular purposes.



***The miracles of science™***