



INTRODUCTION

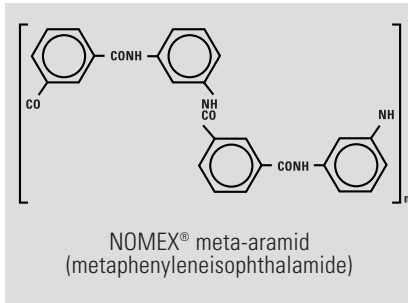


Chemically, NOMEX® paper is an aromatic polyamide and is generally known as an aramid. The molecular structure of the material is particularly stable and the properties of NOMEX® paper are a consequence of this.

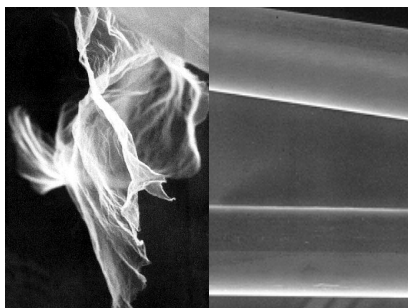

Fibril


Floc

The paper is produced from two forms of the aramid polymer. Small fibrous binder particles – fibrils – are derived directly from the polymer under high shear conditions. These are mixed with short fibres – floc – which are cut to length from a fibre filament.

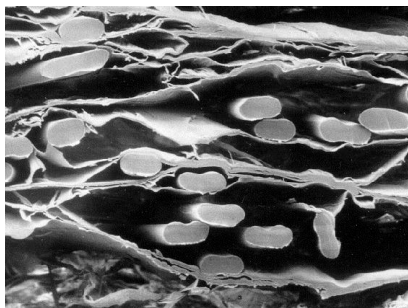

Side view – NOMEX® Type 411

The two components, floc and fibrils, are combined in a water-based slurry from which a continuous sheet structure is produced on a specialized papermaking machine. The paper, as it comes from the machine, is low density with only moderate mechanical and electrical properties.

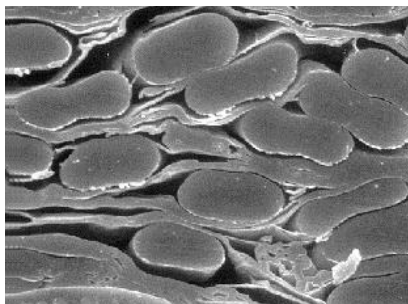

Side view – NOMEX® Type 410

Subsequent densification and internal bonding is achieved by means of high-temperature calendering. The resulting paper is mechanically strong, flexible and has good electrical properties, which are maintained at high temperatures.

TECHNICAL DATA SHEET

During the papermaking process, the floc, which are longer than the fibrils, align themselves with the direction of the paper coming off the machine. There is therefore a significant difference in mechanical properties of NOMEX® paper in the Machine Direction – MD – and the Cross Direction – XD. Mechanical properties are thus quoted for the two directions.

Commercial production of NOMEX® paper was started in 1967 at the Spruance Plant located in Richmond, Virginia (USA). Today, this plant continues to be the primary producer of all the NOMEX® paper types. In July 1991, the NOMEX® paper plant in Richmond was awarded the ISO 9002 Quality Assurance Certification after undergoing a rigorous quality audit by a joint team from Underwriters Laboratories (UL) and the British Standards Institute (BSI).

Since early 1989, a selected number of NOMEX® paper types are also produced at the Mishima Plant, located in Osaka (Japan). The Mishima plant also achieved ISO 9002 certification in 1992.

Both facilities are also certified for compliance to ISO 9001:2000, the more stringent requirement recently developed.

DIMENSIONS AND WEIGHTS

NOMEX® TYPE 410

Thickness		914 mm/2X (36 inches/2X)				1828 mm/6X (72 inches/6X)				Yield		Basis weight	
		Roll Weight		Length		Roll Weight		Length					
mm	mil	kg	lb	m	yd	kg	lb	m	yd	m ² /kg	sq. yd/lb	g/m ²	oz/sq. yd.
0.05	2	43	94	1143	1250	255	562	3429	3750	24.6	13.3	40.7	1.2
0.08	3	45	98	768	840	267	589	2304	2520	15.8	8.6	63.4	1.9
0.13	5	46	102	439	480	278	613	1317	1440	8.7	4.7	115.6	3.4
0.18	7	51	113	320	350	306	676	960	1050	5.7	3.1	174.6	5.1
0.25	10	54	119	238	260	325	716	713	780	4.0	2.2	249.2	7.3
0.30	12	52	114	183	200	310	683	549	600	3.2	1.8	308.9	9.1
0.38	15	56	124	155	170	338	746	466	510	2.5	1.4	396.7	11.7
0.51	20	59	131	119	130	356	786	357	390	1.8	1.0	546.6	16.1
0.61	24	64	140	101	110	382	843	302	330	1.4	0.8	693.0	20.4
0.65	25.5	61	135	96	105	N/A	N/A	N/A	N/A	1.4	0.8	696.4	20.5
0.73	29	64	142	82	90	386	850	247	270	1.2	0.6	854.4	25.2
0.76	30	64	141	82	90	382	843	247	270	1.2	0.6	847.3	25.0

*Standard width 914 mm +/- 3 mm (36 inches +/- 1/8 inch)
Standard width 1828 mm +/- 6 mm (72 inches +/- 1/4 inch)

NOMEX® TYPE 411

Thickness		Roll weight		Length		Yield		Basis weight	
mm	mil	kg	lb	m	yd	m ² /kg	sq. yd/lb	g/m ²	oz/sq. yd.
0.13	5	21	47	530	580	24.0	13.0	41.7	1.2
0.18	7	21	47	347	380	15.6	8.5	64.1	1.9
0.25	10	21	47	265	290	12.2	6.6	81.7	2.4
0.38	15	21	47	165	180	7.5	4.1	133.9	3.9
0.58	23	18	40	91	100	4.9	2.6	205.1	6.0

Standard width 965 mm +/- 6 mm (38 inches +/- 1/4 inch)

NOMEX® TYPE 414

Thickness		Roll weight		Length		Yield		Basis weight	
mm	mil	kg	lb	m	yd	m ² /kg	sq. yd/lb	g/m ²	oz/sq. yd.
0.09	3.4	45	99	594	650	12.1	6.6	82.7	2.4
0.18	7	52	114	320	350	5.7	3.1	176.3	5.2
0.25	10	55	121	238	260	4.0	2.2	251.9	7.4
0.30	12	52	114	183	200	3.2	1.8	309.2	9.1
0.38	15	57	125	155	170	2.5	1.4	398.4	11.8

Standard width 914 mm +/- 3 mm (36 inches +/- 1/8 inch)

NOMEX® TYPE 418

Thickness		Roll weight		Length		Yield		Basis weight	
mm	mil	kg	lb	m	yd	m ² /kg	sq. yd/lb	g/m ²	oz/sq. yd.
0.08	3	50	110	613	670	11.2	6.1	89.2	2.6
0.13	5	60	131	439	480	6.7	3.7	148.4	4.4
0.20	8	63	140	293	320	4.2	2.3	236.8	7.0
0.25	10	63	140	229	250	3.3	1.8	301.3	8.9
0.36	14	53	117	146	160	2.5	1.4	396.7	11.7

Standard width 914 mm +/- 3 mm (36 inches +/- 1/8 inch)

NOMEX® TYPE 419

Thickness		Roll weight		Length		Yield		Basis weight	
mm	mil	kg	lb	m	yd	m ² /kg	sq. yd/lb	g/m ²	oz/sq. yd.
0.18*	7	28	61	329	360	10.9	5.9	91.45	2.7
0.33**	13	82	182	576	630	6.6	3.6	152.32	4.5

*Standard width 914 mm +/- 6 mm (36 inches +/- 1/4 inch)
 **Standard width 940 mm +/- 6 mm (37 inches +/- 1/4 inch)

NOMEX® TYPE E56

Thickness		Roll weight		Length		Yield		Basis weight	
mm	mil	kg	lb	m	yd	m ² /kg	sq. yd/lb	g/m ²	oz/sq. yd.
0.13	5	35	77	439	480	11.4	6.2	87.5	2.6
0.18	7	35	78	320	350	8.3	4.5	120.4	3.6
0.25	10	37	82	238	260	5.9	3.2	170.9	5.0
0.30	12	33	72	183	200	5.1	2.8	196.0	5.8
0.38	15	36	80	155	170	3.9	2.1	256.7	7.6
0.51	20	37	82	119	130	2.9	1.6	341.8	10.1

Standard width 914 mm +/- 3 mm (36 inches +/- 1/8 inch)

NOMEX® TYPE 992

Thickness		Width		Length		Typical basis WT*		Sq. meters	Sq. yards	Approx. sheet WT*	
mm	mil	mm	inches	mm	inches	g/m ²	oz/sq. yd.	m ²	sq. yd.	kg	lbs.
1.6	63	1067	42	1041	41	810	23.9	1.11	1.33	0.90	2.0
3.2	125	1067	42	1041	41	1630	48.1	1.11	1.33	1.81	4.0

NOMEX® TYPE 993

Thickness		Width		Length		Typical basis WT*		Sq. meters	Sq. yards	Approx. sheet WT*	
mm	mil	mm	inches	mm	inches	g/m ²	oz/sq. yd.	m ²	sq. yd.	kg	lbs.
1.0	40	1067	42	1041	41	720	21.2	1.11	1.33	0.80	1.8
1.5	60	1067	42	1041	41	1050	31.0	1.11	1.33	1.17	2.6
2.0	80	1067	42	1041	41	1530	45.1	1.11	1.33	1.70	3.7
2.4	95	1067	42	1041	41	1770	52.2	1.11	1.33	1.97	4.3
3.0	120	1067	42	1041	41	2270	67.0	1.11	1.33	2.52	5.6
4.0	160	1067	42	1041	41	3410	100.6	1.11	1.33	3.79	8.4

NOMEX® TYPE 994

Thickness		Width		Length		Typical basis WT*		Sq. meters	Sq. yards	Approx. sheet WT*	
mm	mil	mm	inches	mm	inches	g/m ²	oz/sq. yd.	m ²	sq. yd.	kg	lbs.
1.0	40	355	14	1500	59	1148	33.9	0.53	0.64	0.61	1.3
1.5	60	355	14	1500	59	1708	50.4	0.53	0.64	0.91	2.0
2.0	80	355	14	1500	59	2310	68.1	0.53	0.64	1.23	2.7
3.0	120	355	14	1500	59	3448	101.7	0.53	0.64	1.84	4.1
3.2	125	355	14	1500	59	3657	107.9	0.53	0.64	1.95	4.3
4.0	160	355	14	1500	59	4554	134.3	0.53	0.64	2.43	5.4
4.8	190	355	14	1500	59	5484	161.7	0.53	0.64	2.92	6.4
5.0	200	355	14	1500	59	5691	167.8	0.53	0.64	3.03	6.7
6.0	240	355	14	1500	59	6768	199.6	0.53	0.64	3.61	8.0
6.4	250	355	14	1500	59	7148	210.8	0.53	0.64	3.81	8.4
7.0	275	355	14	1500	59	8039	237.1	0.53	0.64	4.28	9.4
8.0	315	355	14	1500	59	9068	267.4	0.53	0.64	4.83	10.7
9.6	380	355	14	1500	59	11069	326.5	0.53	0.64	5.90	13.0

*basis weights & sheet weights include nominal moisture content

USA

DuPont
Advanced Fibers Systems
Customer Inquiry Center
5401 Jefferson Davis Highway
Richmond, VA 23234
Tel: (800) 453-8527
(804) 383-4400
Fax: (800) 787-7086
(804) 383-4132
E-mail: afscdt@usa.dupont.com

EUROPE

DuPont de Nemours International S.A.
Advanced Fibers Systems
P.O. Box 50
CH-1218 Le Grand-Saconnex
Geneva, Switzerland
Tel: +41-22-717-5111
Fax: +41-22-717-6218
E-mail: info.nomex@che.dupont.com

JAPAN

DuPont Teijin Advanced Papers (Japan) Limited
ARCO Tower,
8-1 Shimomeguro I-chome
Meguro-ku, Tokyo 153-0064
Japan
Tel: +81-3-5434-6609
Fax: +81-3-5434-6605
E-mail: chihiro.kondo@jpn.dupont.com

CANADA

DuPont Canada, Inc.
Advanced Fibers Systems
P.O. Box 2200
Streetsville Postal Station
Mississauga, Ontario, L5M 2H3
Canada
Tel: (800) 387-2122
(905) 821-5193
Fax: (905) 821-5177
E-mail: products@can.dupont.com

SOUTH AMERICA

DuPont do Brasil S.A.
Alameda Itapecuru, 506
BR-06454-080 Alphaville
Barueri, São Paulo
Brasil
Tel: +0800-17-17-15
+55 11 4166 8449
Fax: +55 11 7266 8904
E-mail: produtos.brasil@bra.dupont.com

ASIA PACIFIC

DuPont Teijin Advanced Papers (Asia) Limited
1122 New World Office Building, East Wing
24 Salisbury Road
Tsimshatsui, Kowloon
Hong Kong
Tel: +852-2734-5363
Fax: +852-2734-5486
E-mail: nomexpaper@hkg.dupont.com

www.dupont.com/nomex

Product safety information is available upon request. This information corresponds to our current knowledge on the subject. It is offered solely to provide possible suggestions for your own experiments. It is not intended, however, to substitute for any testing you may need to conduct to determine for yourself the suitability of our products for your particular purposes. This information may be subject to revision as new knowledge and experience becomes available. Since we cannot anticipate all variations in actual end-use conditions, DUPONT MAKES NO WARRANTIES AND ASSUMES NO LIABILITY WHATSOEVER IN CONNECTION WITH ANY USE OF THIS INFORMATION. Nothing in this publication is to be considered as a license to operate under or a recommendation to infringe any patent right.

© Copyright 2003 E.I. du Pont de Nemours and Company. All rights reserved. The DuPont oval logo, The miracles of science® DuPont®, and NOMEX® are trademarks or registered trademarks of E.I. du Pont de Nemours and Company.

H-93498-1 Rev. 04/03 Printed in USA



The miracles of science®