Effects of Sterilization and 1- and 3-Year Real-Time Aging on Material Tensile Strength (MD) for 1059B

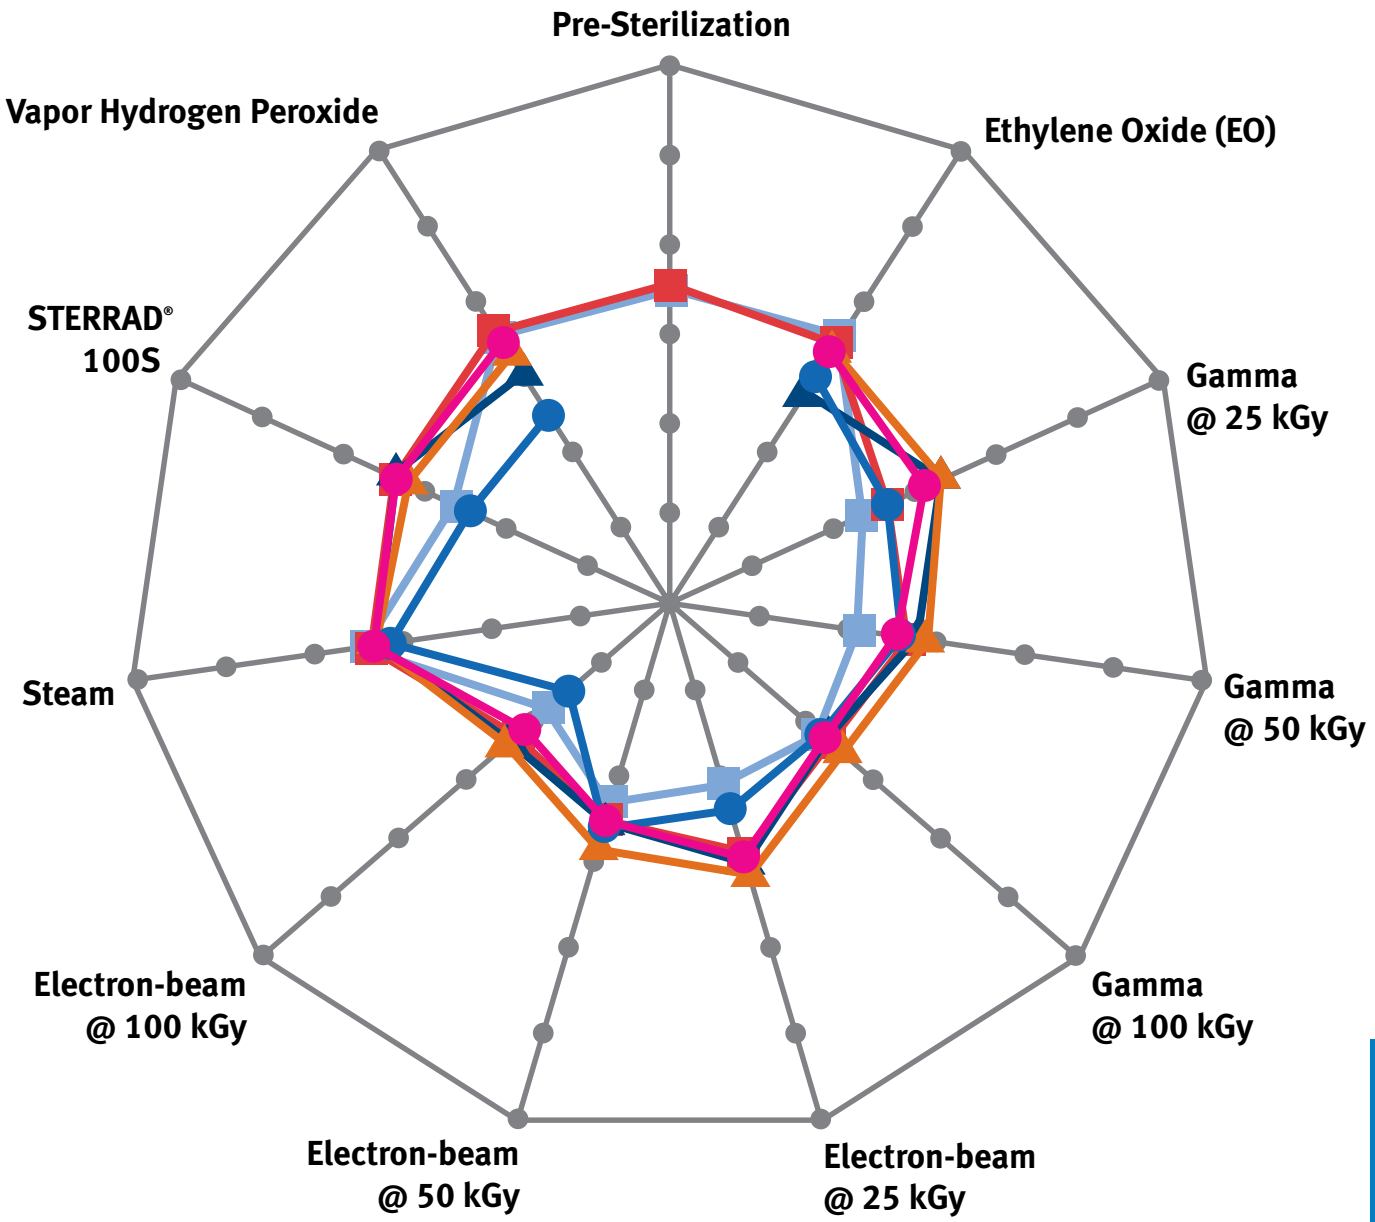

- Transition Protocol Material 3-Year Real-Time Aging
- Control 3-Year Real-Time Aging
- Transition Protocol Material 1-Year Real-Time Aging
- Control 1-Year Real-Time Aging
- Transition Protocol Material 0-Year
- Control 0-Year

ASTM D5034
Control = DuPont™ Tyvek® 1059B
Center point = 0 lb_f/4 in.
Outer point = 150 lb_f/4 in.
MD = Machine Direction

Transition Protocol material performance is equivalent to, or better than, current Tyvek®.

Effects of Sterilization and 1- and 3-Year Real-Time Aging on Material Tensile Strength (CD) for 1059B

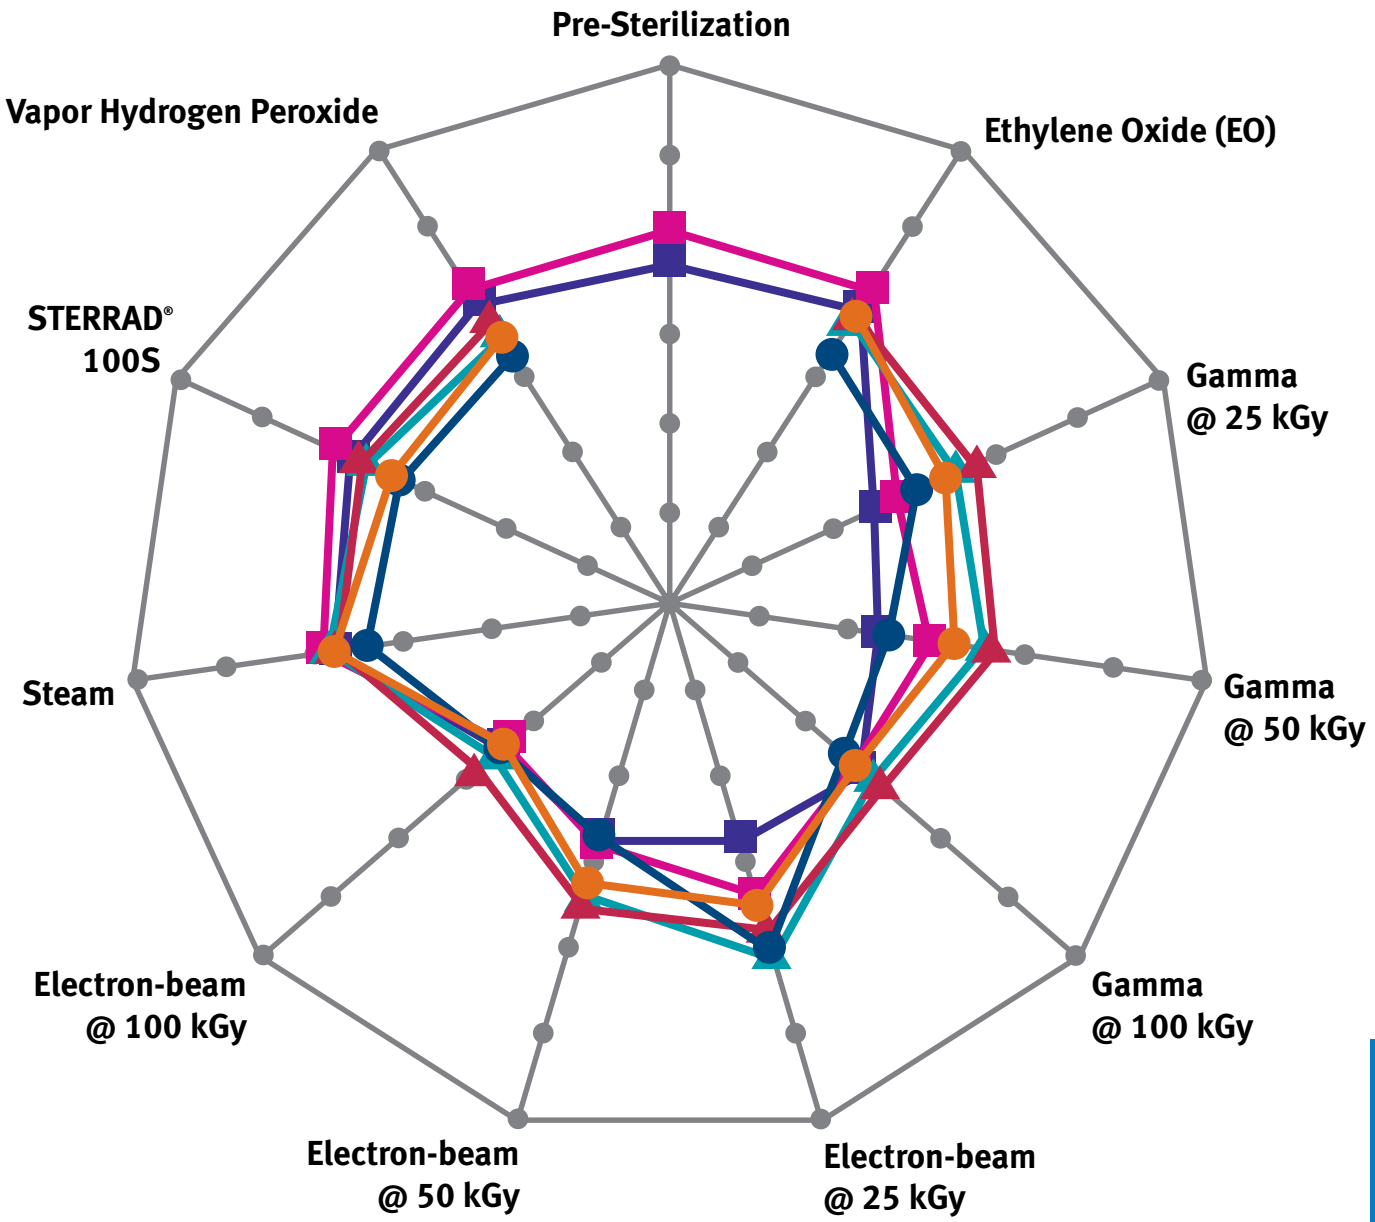

- Transition Protocol Material 3-Year Real-Time Aging
- Control 3-Year Real-Time Aging
- Transition Protocol Material 1-Year Real-Time Aging
- Control 1-Year Real-Time Aging
- Transition Protocol Material 0-Year
- Control 0-Year

ASTM D5034
Control = DuPont™ Tyvek® 1059B
Center point = 0 lb_f/4 in.
Outer point = 150 lb_f/4 in.
CD = Cross Direction

Transition Protocol material performance is equivalent to, or better than, current Tyvek®.

Effects of Sterilization and 1- and 3-Year Real-Time Aging on Material Elongation (MD) for 1059B

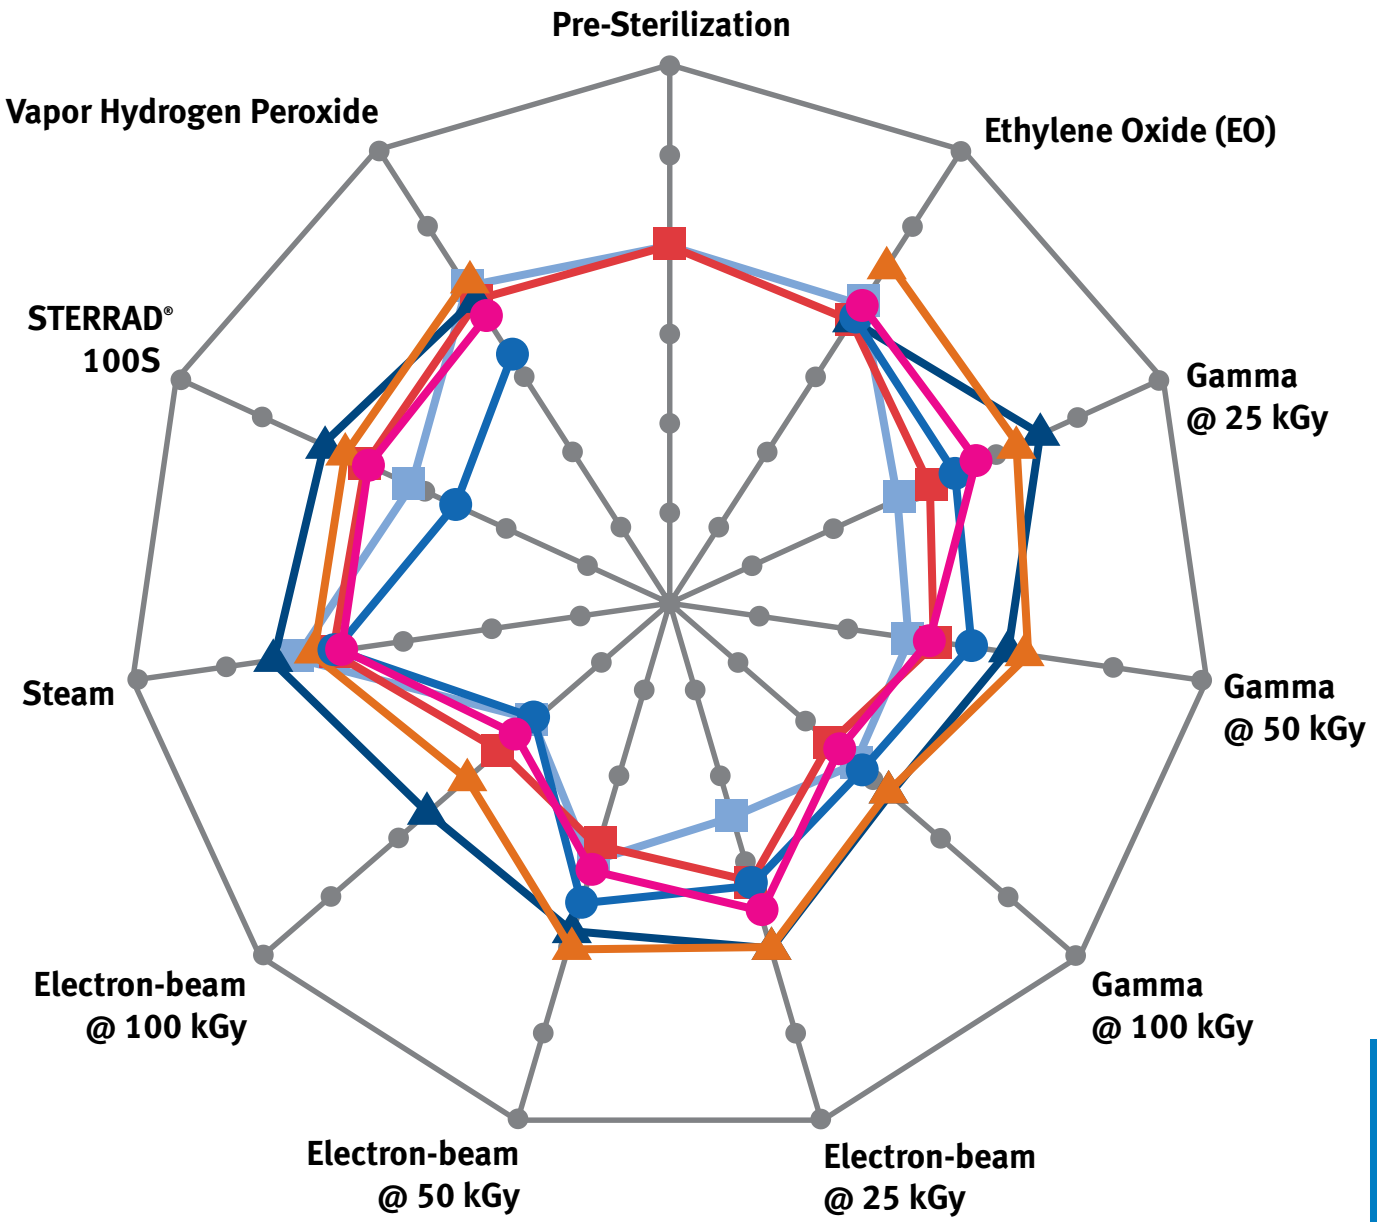

- Transition Protocol Material 3-Year Real-Time Aging
- Control 3-Year Real-Time Aging
- Transition Protocol Material 1-Year Real-Time Aging
- Control 1-Year Real-Time Aging
- Transition Protocol Material 0-Year
- Control 0-Year

ASTM D5034
Control = DuPont™ Tyvek® 1059B
Center point = 0%
Outer point = 30%
MD = Machine Direction

Transition Protocol material performance is equivalent to, or better than, current Tyvek®.

Effects of Sterilization and 1- and 3-Year Real-Time Aging on Material Elongation (CD) for 1059B

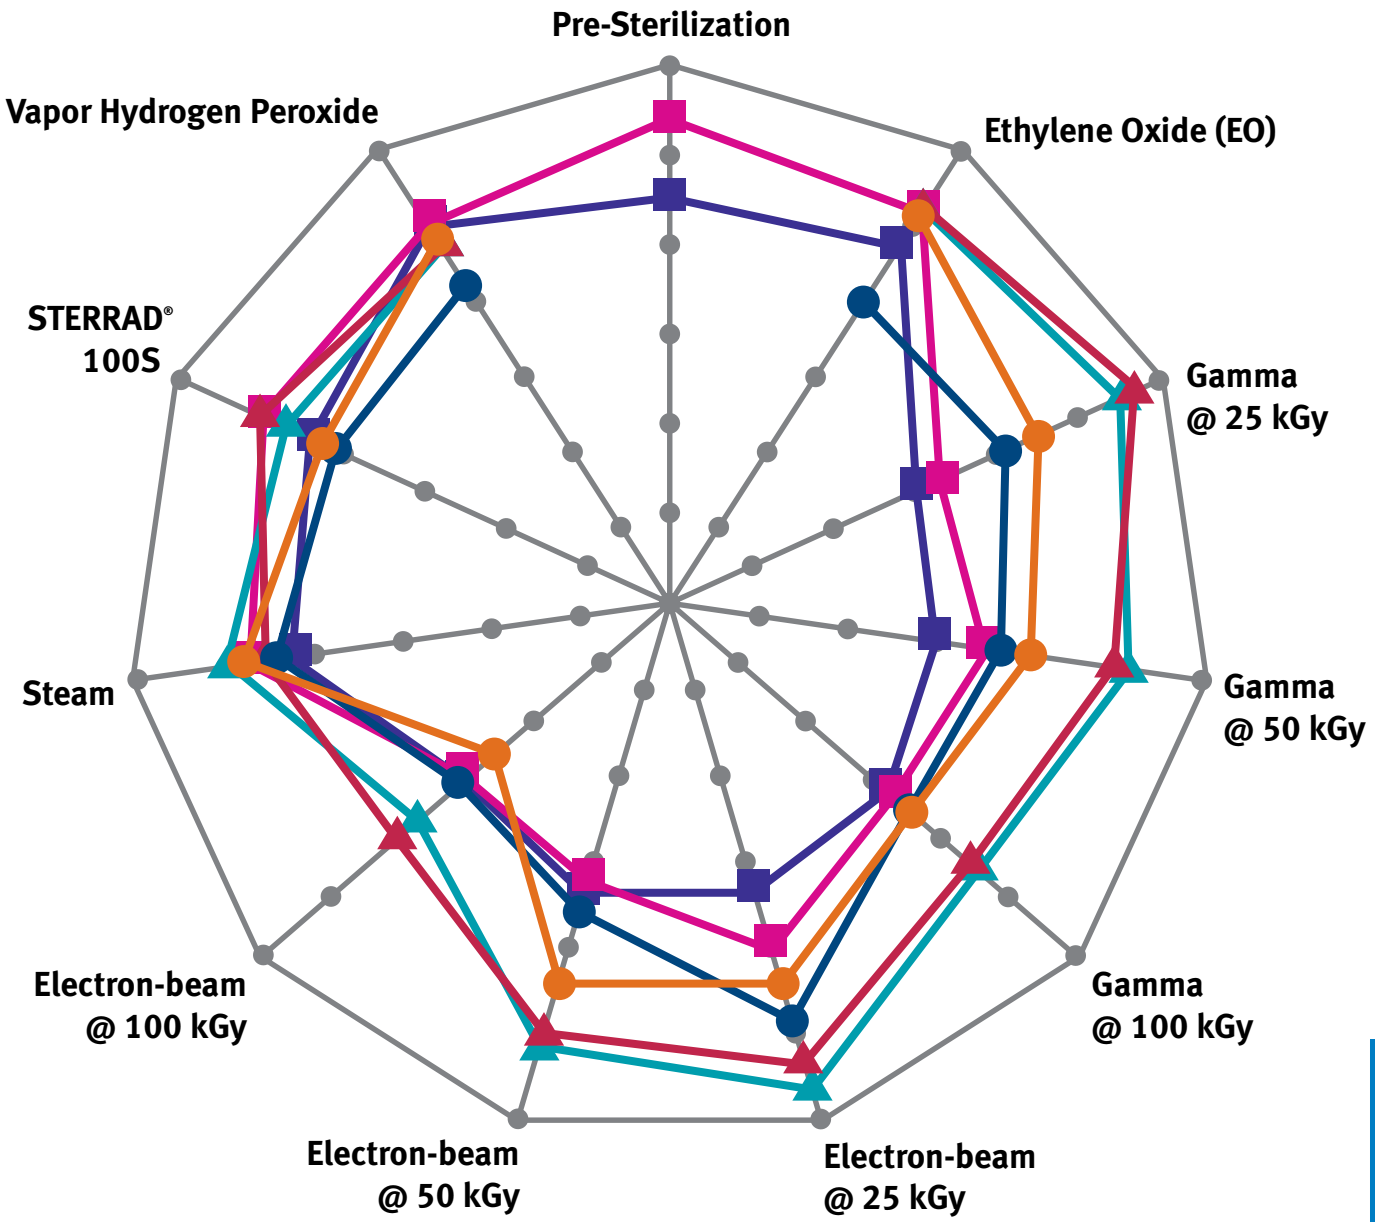

- Transition Protocol Material 3-Year Real-Time Aging
- Control 3-Year Real-Time Aging
- Transition Protocol Material 1-Year Real-Time Aging
- Control 1-Year Real-Time Aging
- Transition Protocol Material 0-Year
- Control 0-Year

ASTM D5034
Control = DuPont™ Tyvek® 1059B
Center point = 0%
Outer point = 30%
CD = Cross Direction

Transition Protocol material performance is equivalent to, or better than, current Tyvek®.

Effects of Sterilization and 1- and 3-Year Real-Time Aging on Material Puncture Strength for 1059B

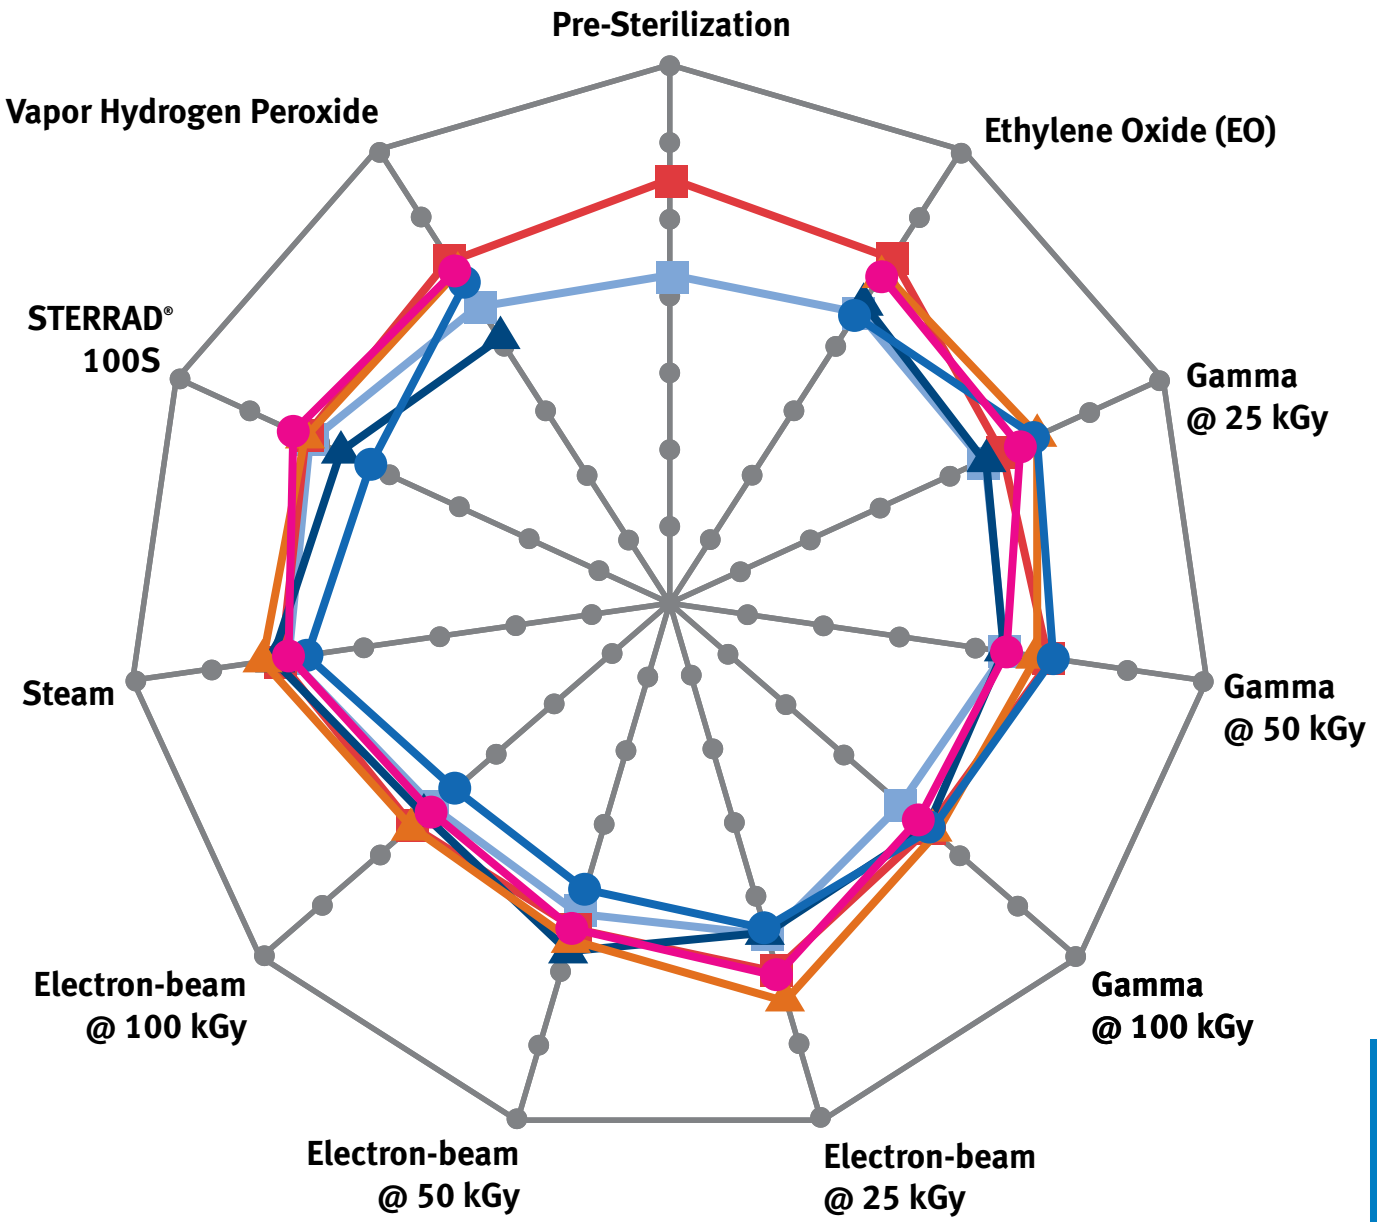

- Transition Protocol Material 3-Year Real-Time Aging
- Control 3-Year Real-Time Aging
- Transition Protocol Material 1-Year Real-Time Aging
- Control 1-Year Real-Time Aging
- Transition Protocol Material 0-Year
- Control 0-Year

ASTM F1342
Control = DuPont™ Tyvek® 1059B
Center point = 0 lb_f
Outer point = 3.5 lb_f

Transition Protocol material performance is equivalent to, or better than, current Tyvek®.

Template

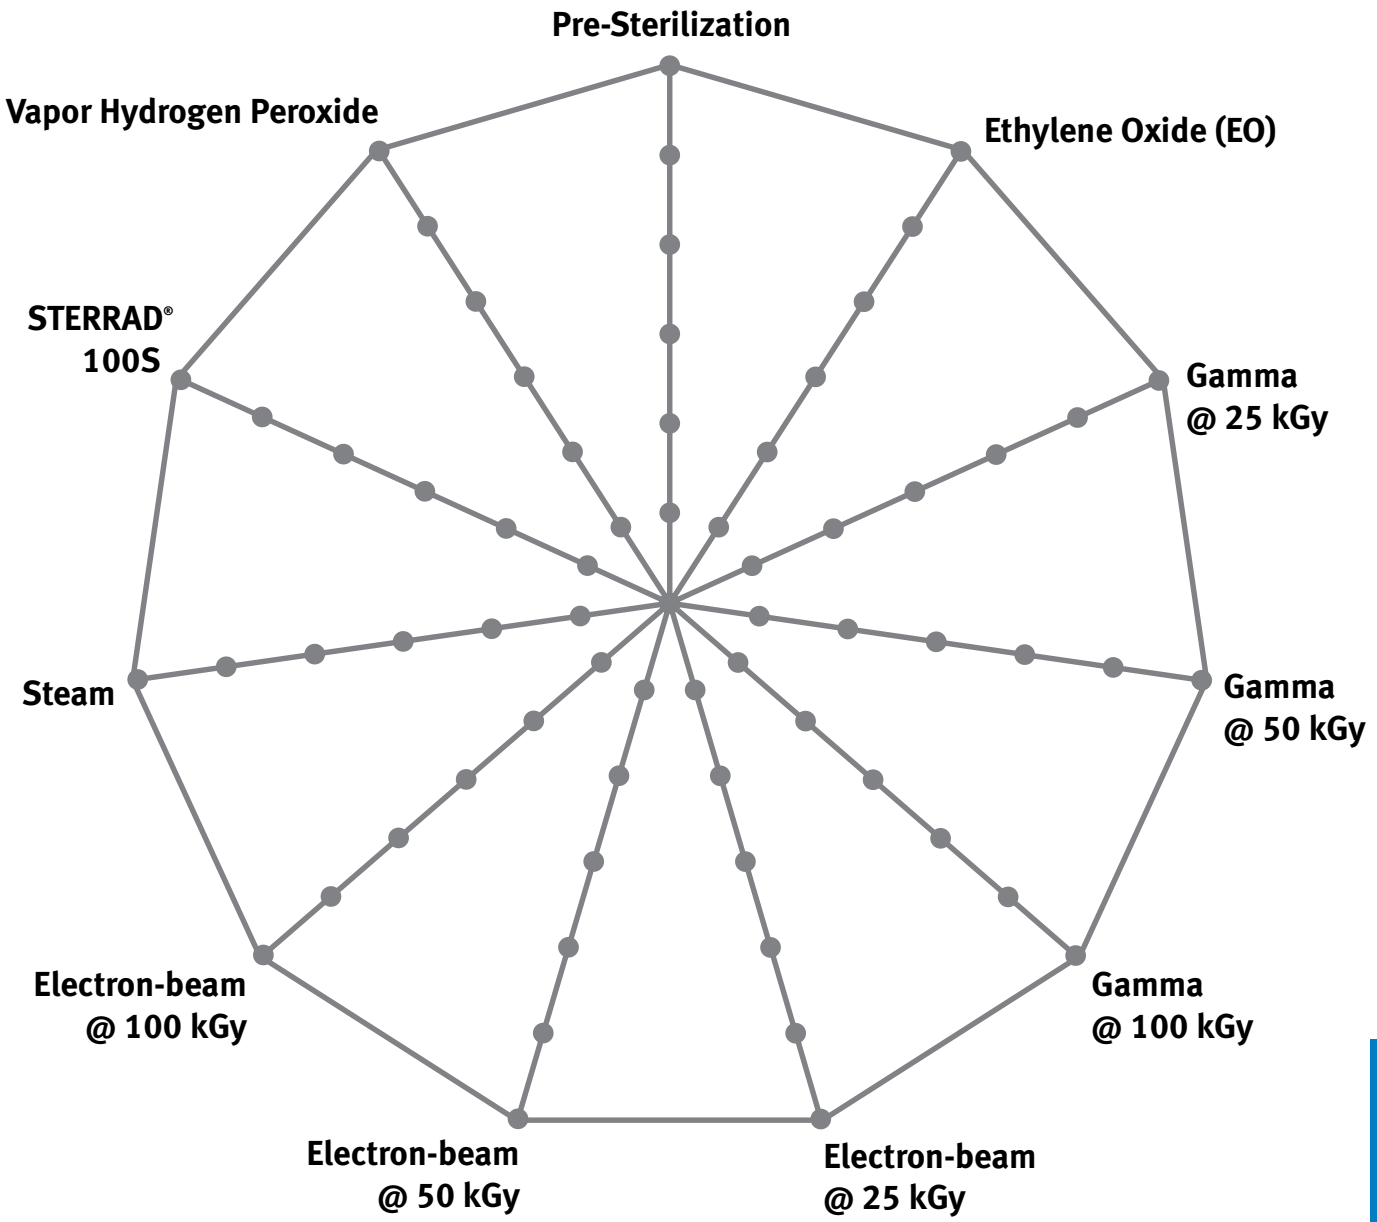

- Transition Protocol Material 5-Year Real-Time Aging
- Control 5-Year Real-Time Aging
- Transition Protocol Material 3-Year Real-Time Aging
- Control 3-Year Real-Time Aging
- Transition Protocol Material 1-Year Real-Time Aging
- Control 1-Year Real-Time Aging
- Transition Protocol Material 0-Year
- Control 0-Year

Test
Control =
Center point =
Outer point =

Transition Protocol material performance is equivalent to, or better than, current Tyvek®.