


# Smart Lubrication™ Solutions

More than 65 years of trusted expertise

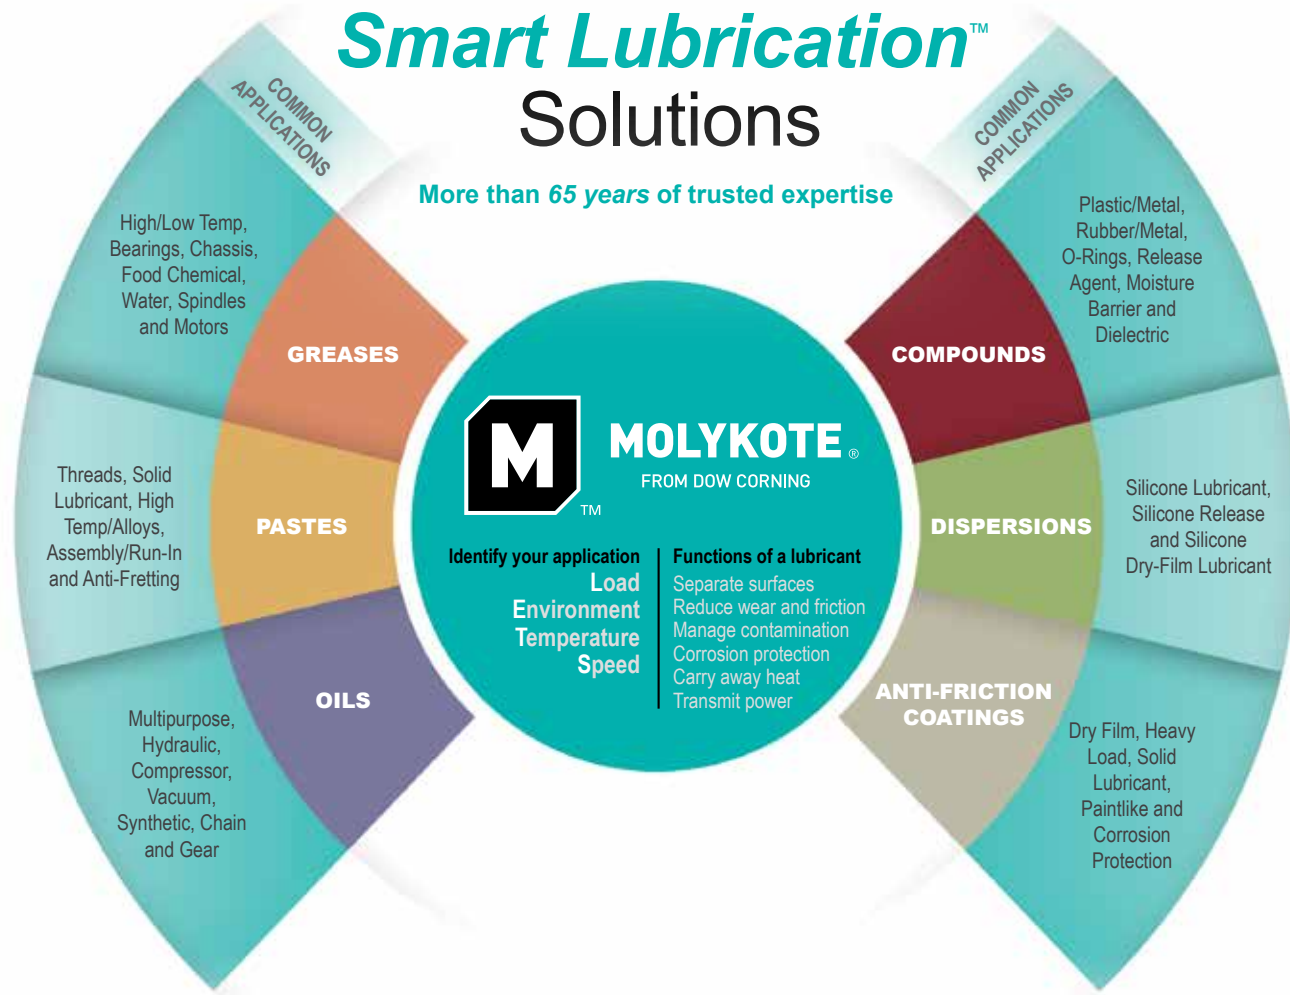

DOW CORNING

Automotive Solutions

**MOLYKOTE**  
FROM DOW CORNING



## AUTOMOTIVE SPECIALTY LUBRICANTS

[molykote.com](http://molykote.com)  
[tech.info@dowcorning.com](mailto:tech.info@dowcorning.com)  
1-800-248-2481

DOW CORNING



Images: Cover - AV23345, AV23338, AV23360, AV23273; Page 2 - AV23590, AV23337, AV23592, AV23340, AV23583, AV23339, AV23584, AV19031, AV23591, AV23338, AV23587, AV13726; Page 3 - AV23677

### HANDLING PRECAUTIONS

PRODUCT SAFETY INFORMATION REQUIRED FOR SAFE USE IS NOT INCLUDED IN THIS DOCUMENT. BEFORE HANDLING, READ PRODUCT AND MATERIAL SAFETY DATA SHEETS AND CONTAINER LABELS FOR SAFE USE, PHYSICAL AND HEALTH HAZARD INFORMATION. THE MATERIAL SAFETY DATA SHEET IS AVAILABLE ON THE DOW CORNING WEBSITE AT DOWCORNING.COM, OR FROM YOUR DOW CORNING SALES APPLICATION ENGINEER, OR DISTRIBUTOR, OR BY CALLING DOW CORNING CUSTOMER SERVICE.

### LIMITED WARRANTY INFORMATION – PLEASE READ CAREFULLY

The information contained herein is offered in good faith and is believed to be accurate. However, because conditions and methods of use of our products are beyond our control, this information should not be used in substitution for customer's tests to ensure that our products are safe, effective and fully satisfactory for the intended end use. Suggestions of use shall not be taken as inducements to infringe any patent.

Dow Corning's sole warranty is that our products will meet the sales specifications in effect at the time of shipment.

Your exclusive remedy for breach of such warranty is limited to refund of purchase price or replacement of any product shown to be other than as warranted.

TO THE FULLEST EXTENT PERMITTED BY APPLICABLE LAW, DOW CORNING SPECIFICALLY DISCLAIMS ANY OTHER EXPRESS OR IMPLIED WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE OR MERCHANTABILITY.

DOW CORNING DISCLAIMS LIABILITY FOR ANY INCIDENTAL OR CONSEQUENTIAL DAMAGES.

Dow Corning and Molykote are registered trademarks of Dow Corning Corporation.

We help you invent the future, Smart Lubrication and Smart Science Drives Mobility Innovation are trademarks of Dow Corning Corporation.

©2015 Dow Corning Corporation. All rights reserved.

Printed in USA

AGP14173

Form No. 80-8059-01

# AUTOMOTIVE SPECIALTY LUBRICANTS



GREASES | PASTES | OILS | COMPOUNDS | DISPERSIONS | ANTI-FRICTION COATINGS

DOW CORNING


We help you invent the future.™



# SELECT FROM A FULL RANGE OF MOLYKOTE® SMART LUBRICATION™ CHOICES

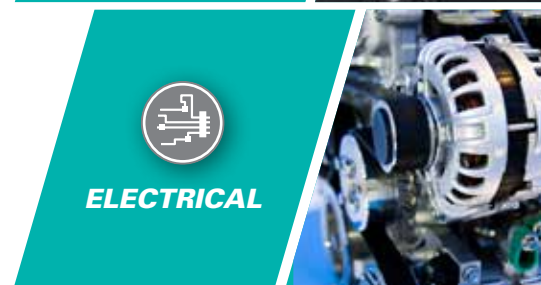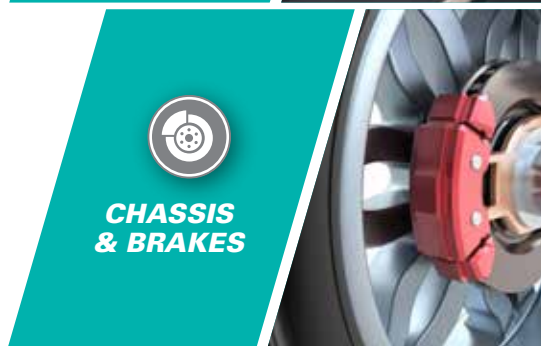

APPLICATION	RECOMMENDED PRODUCT(S)	PRODUCT HIGHLIGHTS
Actuators and Motors	<b>Molykote® MI-60 Grease</b>	Synthetic grease for lubrication of plastic component assemblies
Linear Guides and Slides	<b>Molykote® SK-623 Grease</b>	Synthetic grease with white solids beneficial for noise reduction
Locks, Latches and Levers	<b>Molykote® 3402-C Anti-Friction Coating</b>	Ambient-cured MoS <sub>2</sub> -based AFC providing enhanced wear resistance
	<b>Molykote® D-708 Anti-Friction Coating</b>	Heat-cured PTFE-based AFC with outstanding corrosion protection
	<b>Molykote® 106 Anti-Friction Coating</b>	Heat-cured MoS <sub>2</sub> -based AFC with excellent load-carrying ability
Mirror and Door Assemblies	<b>Molykote® EM-60L Grease</b>	Synthetic grease suitable for low-temperature plastic applications
Sunroof/Moonroof	<b>Molykote® G-1023 Grease</b>	Synthetic grease providing lubricity for fiber-reinforced plastics
Booster/Actuator	<b>Molykote® PG-54 Grease</b>	Silicone-oil-based grease with excellent elastomer capability
Brake Clip	<b>Molykote® D-708 Anti-Friction Coating</b>	Heat-cured PTFE-based AFC providing controlled friction with minimal wear
Brake Pad Shim	<b>Molykote® M-77 Solid Lubricant Paste</b>	Silicone oil with thickener system and MoS <sub>2</sub> solids
Caliper Pin	<b>Molykote® G-3407 Caliper Pin Grease</b>	Synthetic grease useful for anti-fretting in metal-to-metal pairings
	<b>Molykote® G-807 Low Friction Silicone Compound</b>	PTFE-modified compound for rubber-to-metal and plastic-to-metal applications
Drum Brake Components	<b>Molykote® 44MA Grease</b>	Silicone-oil-based grease with great washout resistance
Steering System	<b>Molykote® EM-30L Grease</b>	Synthetic grease for lubricating plastic components
Suspension/Axle System	<b>Molykote® G-4700 Extreme Pressure Synthetic Grease</b>	GC-LB-certified extreme-pressure synthetic grease
AC Compressor Bearings	<b>Molykote® G-2001 High Speed Bearing Grease</b>	Synthetic grease designed for high-rotational-speed applications
Cooling System Connections	<b>Molykote® HP-870 Grease</b>	PFPE grease with enhanced corrosion protection
Engine Cooling Fans	<b>Molykote® 211 Fluid</b>	Silicone coupling fluids from 1,000 to 30,000 cSt
EV Inverter Cooling System Connections	<b>Molykote® HP-670 Grease</b>	PFPE grease with high-temperature stability and minimal oxidation
HVAC Diverter Door Seals	<b>Molykote® MH-62 Grease</b>	PAO-based grease with great plastic compatibility
Starter Motor/Alternator Bearings	<b>Molykote® G-6000 High Temperature Bearing Grease</b>	Synthetic grease used for extreme temperatures and high stress
Starter Motor/Alternator Clutch	<b>Molykote® G-5025 Grease</b>	Silicone grease for extended durability in over-running clutches
Starter Motor/Alternator Planetary Gear	<b>Molykote® 7514 Synthetic Grease</b>	Synthetic grease used successfully for needle bearings
	<b>Molykote® AG-650 Synthetic Grease</b>	Synthetic grease designed for shafts, gearsets and machine elements
Starter Motor/Alternator Spline Shaft	<b>Molykote® 3400A Anti-Friction Coating</b>	Heat-cured MoS <sub>2</sub> -based AFC for fast movements in metal combinations
Wiring and Harness Connections	<b>Molykote® HP-300 Grease</b>	PFPE grease with great material compatibility
Door Rail and Actuators	<b>Molykote® G-1056 Grease</b>	Low-bleed synthetic grease with great shear stability
Interior Controls	<b>Molykote® L-8030 Lubricant</b>	Thin-film fast-drying PFPE fluid with low coefficient of friction and zero ozone depletion
Interior Trim	<b>Molykote® D-96 Anti-Friction Coating</b>	Water-based AFC for anti-squeak and stick-slip elimination
Rails, Slides and Actuators	<b>Molykote® YM-102 Grease</b>	Synthetic grease with solid lubricants for heavily loaded applications
Switches	<b>Molykote® EM-30L Grease</b>	Synthetic grease for lubricating plastic components
	<b>Molykote® G-1057 Grease</b>	Low-bleed synthetic grease with great plastic compatibility
Worm Gear Drives	<b>Molykote® AG-626 Grease</b>	Formulated with solid lubricants to minimize corrosion and oxidation
Bearings	<b>Molykote® BG-20 Synthetic Bearing Grease</b>	Synthetic grease designed for high-speed roller bearings
CV Joints/Universal Joints	<b>Molykote® G-4700 Extreme Pressure Synthetic Grease</b>	GC-LB-certified synthetic grease for extreme-pressure applications
Engine Pistons	<b>Molykote® D-10-GBL Anti-Friction Coating</b>	High-viscosity heat-cured coating for engine components
Engine System and Components	<b>Molykote® D-7409 Anti-Friction Coating</b>	Heat-cured MoS <sub>2</sub> -based AFC providing superior wear resistance
Gaskets	<b>Molykote® D-7620 Anti-Friction Coating</b>	Heat-cured MoS <sub>2</sub> -based AFC designed for roll-coating components
Spark Plug Boots/Ignition Switches	<b>Molykote® G-5008 Dielectric Grease</b>	Silicone grease designed for rubber and ceramic pairings

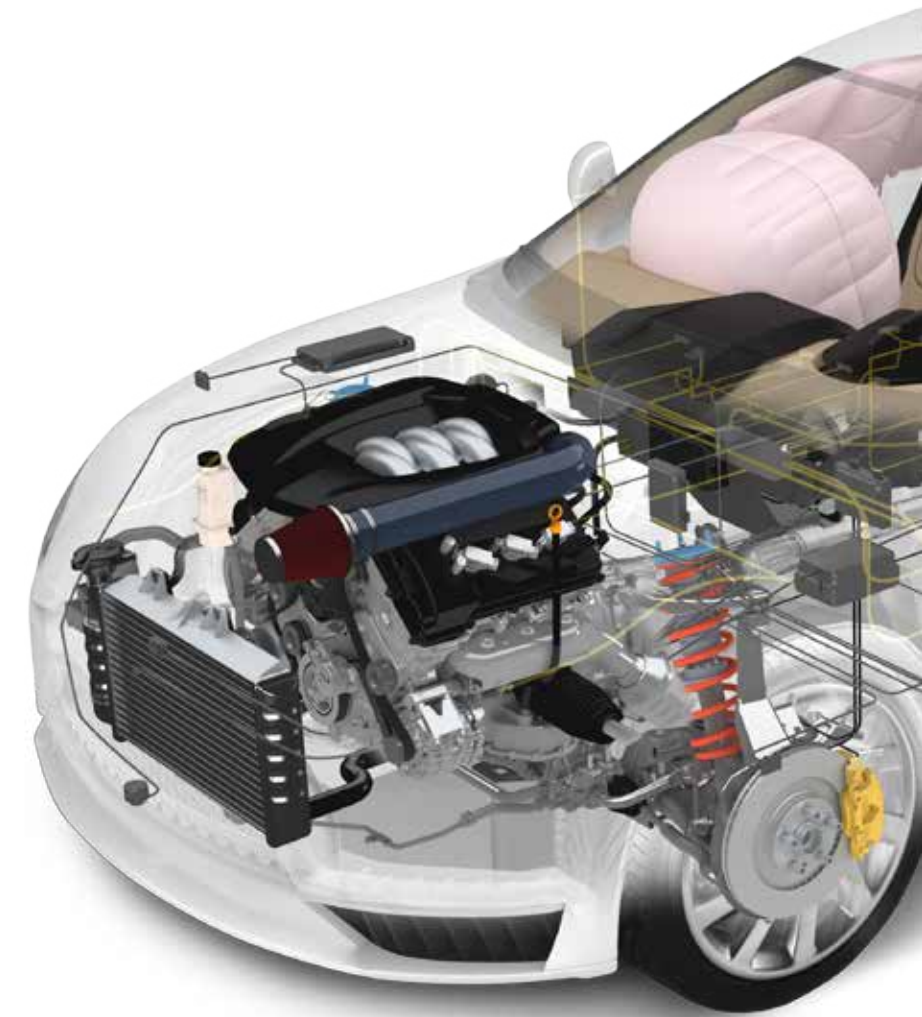

**SMART SCIENCE**  
DRIVES MOBILITY  
INNOVATION™

These are common solutions for automotive components. Contact your Molykote® representative for complete product offerings to meet your needs.