



AMBERLITE™ IRA743

Chelating Resin

Introduction

AMBERLITE IRA743 is a unique ion exchange resin specifically designed and used to remove boric acid and borate from water, magnesium brine or other solutions under a variety of conditions.

The presence of boron compounds, even in very small concentration, is frequently a concern in potable and irrigation water, in ultrapure water as used in the semiconductor industry, and in other chemical processes.

Boric acid can be removed from water with conventional ion exchange resins, but the exchange is not selective and therefore impractical. The selectivity of AMBERLITE IRA743 for boric acid is so high, that removal is very efficient irrespective of the background salinity of the solution.

AMBERLITE IRA743 owes its high selectivity for boric acid to a unique, sugar-like active group. The borate ion makes a very stable complex with the glucamine group, whilst other anions do not react at all.

Properties

Matrix	Macroporous polystyrene
Functional group	N-Methylglucamine
Physical form	Beige-coloured beads
Ionic form as shipped	Free Base (FB)
Total capacity	0.7 eq/L
Moisture holding capacity	48 to 54 % (FB form)
Shipping weight	700 g/L (43.7 lbs/ft ³)
Particle size	
Harmonic mean size	≤ 1.80
Uniformity coefficient	1.6 < 0.300 mm 1 % max

Suggested Operating Conditions

Maximum operating temperature	75 °C
Flow rate	4 to 30 BV/h
Regeneration	Several regeneration procedures are available depending on the application

Applications

Removal from irrigation water

Boron is known to improve plant growth, but within tight limits: excess boron has a very detrimental effect on agriculture. The usually considered limit is 1 mg/L.

Drinking water

For boron removal from drinking water, the use of AMBERLITE PWA10 is recommended.

Ultra-pure water

Boron is used as a dopant in the production of semiconductors. Therefore waste water in this industry contains variable amounts of B. However, boron must be totally absent from the water used in certain production steps. AMBERLITE IRA743 can reduce boron concentrations to ng/L (parts per trillion) levels.

Removal from waste

Boron is present in ceramic tiles and enamels used to decorate them. These boron compounds can be selectively removed from the waste streams using AMBERLITE IRA743.

Purification of magnesium brine

Magnesium is produced by electrolysis. The presence of boron prevents the coalescence of magnesium during the electrolysis of fused Mg salts. The brines must be decontaminated, bringing the B concentration from about 100 to less than 10 mg/L. Another excellent field for the use of AMBERLITE IRA743 which can operate even in a solution with extremely high salt background.

The above applications are examples, and each of them require a specific regeneration procedure. Potential users should contact Rohm and Haas for more details.

Limits of use

Dow Water & Process Solutions manufactures special resins for food processing and potable water applications. As governmental regulations vary from country to country, it is recommended that potential users seek advice from their AMBERLITE representative in order to determine the best resin choice and optimum operating conditions

Hydraulic Characteristics

Figure 1 shows the pressure drop data for AMBERLITE IRA743 in water, as a function of service flow rate and water temperature. Pressure drop data are for clean, classified beds which have not been contaminated with suspended solids during the service run. If the bed accumulates solids, the pressure drop will increase.

Figure 2 shows the bed expansion of AMBERLITE IRA743, as a function of backwash flow rate and water temperature.

Figure 1 : Bed Expansion


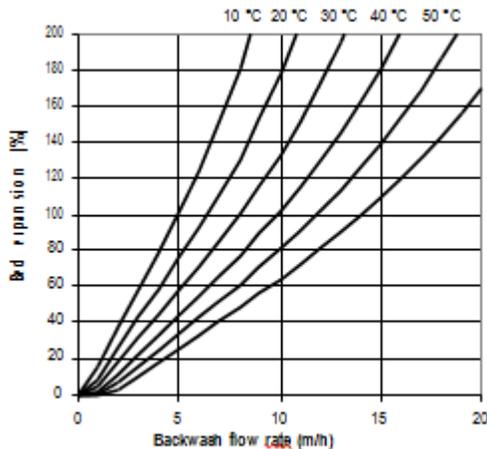


Figure 2 : Pressure Drop

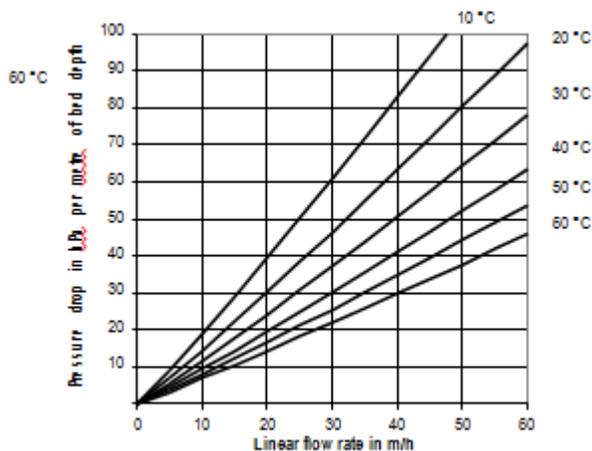

**For more information about DOW™
resins, call the Dow Water & Process
Solutions business:**

North America: 1-800-447-4369
Latin America: (+55) 11-5188-9222
Europe: +800-3-694-6367
Italy: +800-783-825
South Africa: +0800 99 5078
Pacific: +8007776 7776
China: +400 889-0789

<http://www.dowwaterandprocess.com>

Notice: No freedom from infringement of any patent owned by Dow or others is to be inferred. Because use conditions and applicable laws may differ from one location to another and may change with time, Customer is responsible for determining whether products and the information in this document are appropriate for Customer's use and for ensuring that Customer's workplace and disposal practices are in compliance with applicable laws and other governmental enactments. The product shown in this literature may not be available for sale and/or available in all geographies where Dow is represented. The claims made may not have been approved for use in all countries. Dow assumes no obligation or liability for the information in this document. References to "Dow" or the "Company" mean the Dow legal entity selling the products to Customer unless otherwise expressly noted. NO WARRANTIES ARE GIVEN; ALL IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE ARE EXPRESSLY EXCLUDED.

