



DUPONT™ Specialty Membrane XUS290508 and XUS290504 Nanofiltration Elements

Description


The DUPONT™ XUS290508 and XUS290504 High Temperature Nanofiltration Elements offer a distinct combination of features:

- Up to 70°C continuous operating temperature capability due to distinct element and membrane design
- Robust FILMTEC™ nanofiltration membrane sheet
- The 34 mil feed spacer allows for maximum active membrane surface area while lessening the impact of fouling, reducing the pressure drop across the pressure vessel and enhancing cleaning effectiveness.
- The DUPONT™ XUS290508 and XUS290504 NF elements can reduce the size of cooling and heating systems, thus saving on both OPEX and CAPEX. Typical applications are:
 - Waste brine recycling from sugar decolorization,
 - Concentration of thin juice sugars or components in chemical processing,
 - Sulfate removal in Chloralkali process streams.

Typical Properties


DUPONT™ Specialty Membrane	Active Area		Feed Spacer	Minimum ATD OD (in)	ATD included
	(ft ²)	(m ²)	Thickness (mil)		
XUS290508	320	30	34	7.9	Yes
XUS290504	70	6	34	3.9	Yes

**Element
Dimensions**

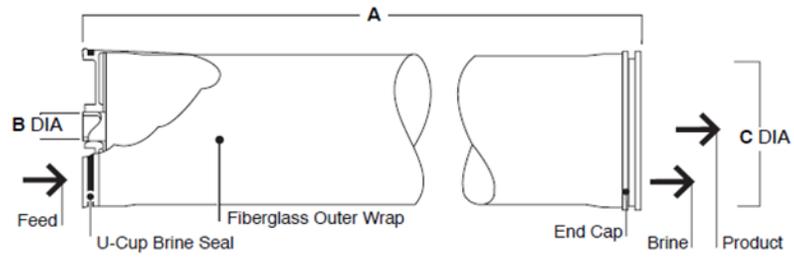

XUS290508(8040)

DUPONT™ Specialty Membranes	A		B		C	
	(in.)	(mm)	(in.)	(mm)	(in.)	(mm)
XUS290508	40	1016	1.125 ID	29 ID	7.9	201

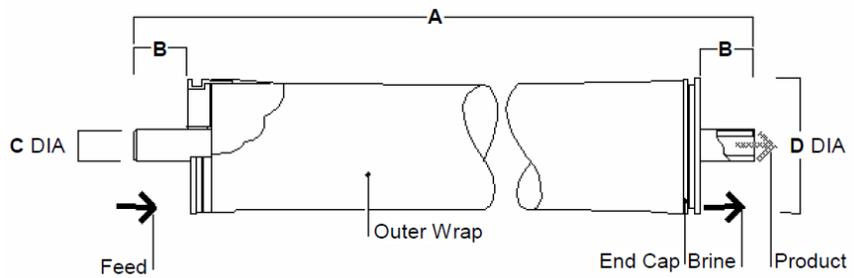


XUS20504 (4040)

DUPONT™ Specialty Membranes	A		B		C		D	
	(in.)	(mm)	(in.)	(mm)	(in.)	(mm)	(in.)	(mm)
XUS290504	40.0	1016	1.03	26	0.75 OD	19 OD	3.9	99

HYPER SHELL™ 4040 elements are designed to fit standard 4040 pressure vessels.

Operating Limits

Maximum Operating Temperature	70°C (158°F)
Maximum Operating Pressure at 80°C	28 bar (406 psi)
Maximum Single Element Pressure Drop < 50°C	0.9 bar (13.1 psi)
Maximum Single Element Pressure Drop < 80°C	0.3 bar (4.4 psi)
Maximum Vessel Pressure Drop < 50°C	4.1 bar (60 psi)
Maximum Vessel Pressure Drop < 80°C	1.2 bar (17 psi)
pH Range	
Continuous Operation (<35°C)	pH2 – pH11
Continuous Operation (35°C to 50°C)	pH3 – pH10
Continuous Operation (< 70°C)	pH4 – pH8
Hydrogen Peroxide Limit	20 ppm
Free Chlorine Tolerance	Below Detectable Limits
Maximum Feed Silt Density Index (SDI ₁₅)	SDI 5

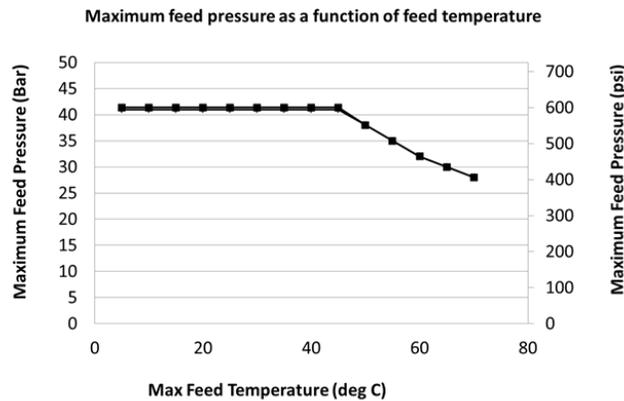

Temperature degC	Pressure	
	bar	psi
5	41	600
10	41	600
15	41	600
20	41	600
25	41	600
30	41	600
35	41	600
40	41	600
45	41	600
50	38	551
55	35	508
60	32	464
65	30	435
70	28	406

Clean in Place (CIP) Parameters

Maximum CIP Pressure	15 to 75 psi (1 to 5 bar)
pH Range, Cleaning (45°C to 50°C)	pH1.8 – pH11.0
pH Range, Cleaning (< 45°C)	pH1 – pH13
Hydrogen Peroxide Limit, Short-Term Cleaning	1,000 ppm

1. Please refer to the FILMTEC™ Membranes Technical Manual for more information regarding cleaning procedures.
2. Under certain conditions, the presence of free chlorine and other oxidizing agents will cause premature membrane failure.
DuPont Water Solutions recommends removing residual free chlorine using pretreatment, prior to membrane exposure. Please refer to the FILMTEC™ Membranes Technical Manual for more information.

Important Start-Up Information

Normally, new elements are cleaned prior to initial use. The cleaning procedure should be based on the application for which the elements are to be used. If cleaning with formulated agents is not available, an alkaline wash with a wetting agent is recommended prior to initial use. Please refer to FILMTEC™ Membranes Technical Manual for more information.

Avoid any abrupt pressure or cross flow variations on the spiral elements during start-up, shutdown, cleaning or other sequences to prevent possible membrane damage. During startup, a gradual change from a standstill to operating state is recommended as follows:

- Feed pressure should be increased gradually over a 30-60 second time frame.
- Before initiating cross-flow at high permeate flux conditions (e.g., start-up with high temperature water), the set operating pressure should be maintained for 5-10 minutes.
- Cross-flow velocity at set operating point should be achieved gradually over 15-20 seconds.
- Avoid permeate-side backpressure at all times.

General Information:

- Keep elements moist at all times after initial wetting.
- To control the spread of biological growth during system shutdowns, it is recommended that elements be immersed in a preservative solution.

Warranty Information:

Reference warranty document: DuPont Specialty Membrane Prorated Element Warranty.

Before use or storage, review these additional resources for important information:

Product Stewardship

DuPont has a fundamental concern for all who make, distribute, and use its products, and for the environment in which we live. This concern is the basis for our product stewardship philosophy by which we assess the safety, health, and environmental information on our products and then take appropriate steps to protect employee and public health and our environment. The success of our product stewardship program rests with each and every individual involved with DuPont products— from the initial concept and research, to manufacture, use, sale, disposal, and recycle of each product.

Customer Notice

DuPont strongly encourages its customers to review both their manufacturing processes and their applications of DuPont products from the standpoint of human health and environmental quality to ensure that DuPont products are not used in ways for which they are not intended or tested. DuPont personnel are available to answer your questions and to provide reasonable technical support. DuPont product literature, including safety data sheets, should be consulted prior to use of DuPont products. Current safety data sheets are available from DuPont.

Please be aware of the following:

- The use of this product in and of itself does not necessarily guarantee the removal of cysts and pathogens from water. Effective cyst and pathogen reduction is dependent on the complete system design and on the operation and maintenance of the system.
- Permeate obtained from the first hour of operation should be discarded (or in a few cases: Any concentrate or permeate obtained from the first hour of operation should be discarded).

Regulatory Note

These membranes may be subject to drinking water application restrictions in some countries: please check the application status before use and sale.

Have a question? Contact us at:

www.dupont.com/water/contact-us

All information set forth herein is for informational purposes only. This information is general information and may differ from that based on actual conditions. Customer is responsible for determining whether products and the information in this document are appropriate for Customer's use and for ensuring that Customer's workplace and disposal practices are in compliance with applicable laws and other government enactments. The product shown in this literature may not be available for sale and/or available in all geographies where DuPont is represented. The claims made may not have been approved for use in all countries. Please note that physical properties may vary depending on certain conditions and while operating conditions stated in this document are intended to lengthen product lifespan and/or improve product performance, it will ultimately depend on actual circumstances and is in no event a guarantee of achieving any specific results. DuPont assumes no obligation or liability for the information in this document. References to "DuPont" or the "Company" mean the DuPont legal entity selling the products to Customer unless otherwise expressly noted. NO WARRANTIES ARE GIVEN; ALL IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE ARE EXPRESSLY EXCLUDED. No freedom from infringement of any patent or trademark owned by DuPont or others is to be inferred.

DuPont™, the DuPont Oval Logo, and all products, unless otherwise noted, denoted with a ™, ™, or ® are trademarks, service marks or registered trademarks of affiliates of DuPont de Nemours Inc. Copyright © 2019 DuPont de Nemours Inc. All rights reserved.

