



## **DOW™ Specialty Membrane XUS120308 and XUS120304 Reverse Osmosis Elements**


### **Description**

The DOW™ XUS120308 and XUS120304 High Temperature Reverse Osmosis Elements offer a distinct combination of features:

- Up to 80°C continuous operating temperature capability due to special element and membrane design
- Robust DOW FILMTEC™ SW30 based reverse osmosis (RO) membrane sheet
- DOW HYPERSELL™ Reverse Osmosis technology, a machined polypropylene rigid outer shell:
  - Minimized channeling and control of premature element failures throughout product lifetime
  - Improved hydrodynamics of the element compared to mesh wrapped elements, which can result in energy savings and improved processing and Clean In Place (CIP) efficiency.
  - Improved safety and faster loading and unloading of elements from a system due to the rigid HYPERSELL™ case, which doesn't expand over time.
  - Easy and permanent identification due to laser etched model names and serial numbers.
- The 48 mil parallel feed spacer lessens the impact of fouling, reduces the pressure drop across the pressure vessel and enhances cleaning effectiveness.
- The DOW™ XUS120308 and XUS120304 RO elements can reduce the size of cooling and heating systems, thus saving on both OPEX and CAPEX. Typical applications are:
  - Hot evaporator condensate reuse for process and rinsing purposes,
  - Concentration of thin juice sugars or components in chemical processing,
  - Production of water for the pharmaceutical industry.

Figure 1. Pressure Drop vs. Feed Flow for Mesh wrap and DOW™ HYPERSELL 8038 Elements


DOW HYPER SHELL™ Elements have less exterior bypassing and require approximately 30% less flow than mesh wrap for an equivalent pressure drop. The graph indicates the flow comparison at 4psi delta P. Energy can be saved by reducing flow.

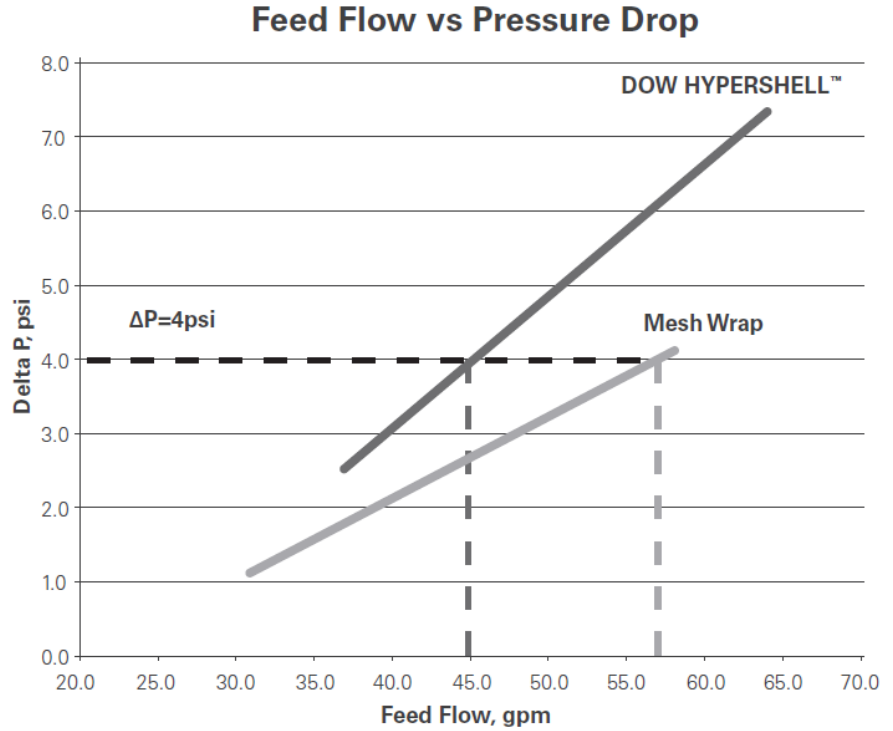

## Product Specifications


DOW™ Specialty Membrane	Active Area		Feed Spacer Thickness	Minimum ATD OD	ATD included
	(ft <sup>2</sup> )	(m <sup>2</sup> )	(mil)	(inch)	
DOW XUS120308	260	24.2	48	7.9	No
DOW XUS120304	55	5.1	48	3.9	Yes

## Element Dimensions

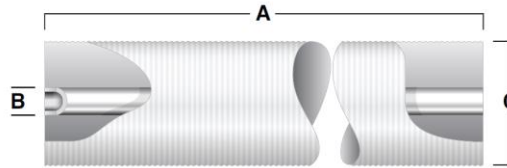

XUS120308( 8038)

DOW™ Specialty Membranes	A		B		C	
	(in.)	(mm)	(in.)	(mm)	(in.)	(mm)
XUS120308	38	965	1.125 ID	29 ID	7.9	201

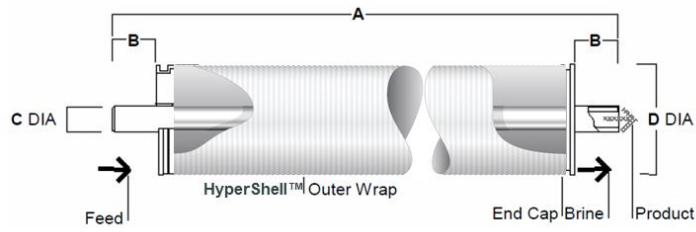

XUS120304 (4040)


DOW™ Specialty Membranes	A		B		C		D	
	(in.)	(mm)	(in.)	(mm)	(in.)	(mm)	(in.)	(mm)
XUS120304	40.0	1016	1.03	26	0.75 OD	19 OD	3.9	99

DOW HYPER SHELL™ 4040 elements are designed to fit standard 4040 pressure vessels.

## Operating Limits

Maximum Operating Temperature	80°C (176°F)
Maximum Operating Pressure at 80°C	30 bar (435 psi)
Maximum Single Element Pressure Drop < 50°C	0.9 bar (13.1 psi)
Maximum Single Element Pressure Drop < 80°C	0.3 bar (4.4 psi)
Maximum Vessel Pressure Drop < 50°C	4.1 bar (60 psi)
Maximum Vessel Pressure Drop < 80°C	1.2 bar (17 psi)
pH Range, Continuous Operation (<45°C)	pH2 – pH11
pH Range, Continuous Operation (< 80°C)	pH3 – pH8
Hydrogen Peroxide Limit	20 ppm
Free Chlorine Tolerance	Below Detectable Limits
Maximum Feed Silt Density Index (SDI <sub>15</sub> )	SDI 5

Maximum feed pressure as a function of feed temperature

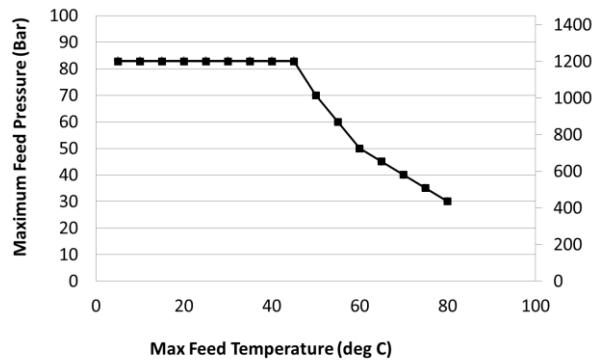

Temperature degC	Pressure	
	bar	psi
5	83	1200
10	83	1200
15	83	1200
20	83	1200
25	83	1200
30	83	1200
35	83	1200
40	83	1200
45	83	1200
50	70	1015
55	60	870
60	50	725
65	45	653
70	40	580
75	35	508
80	30	435

## Clean in Place (CIP) Parameters

Maximum CIP Pressure	15 to 75 psi (1 to 5 bar)
pH Range, Cleaning (45°C to 50°C)	pH1.8 – pH11.0
pH Range, Cleaning (< 45°C)	pH1 – pH13
Hydrogen Peroxide Limit, Short-Term Cleaning	1,000 ppm

<sup>a</sup> Please refer to [Dow Food & Dairy Cleaning Guide form 609-00077-0910](#) for more information.

<sup>b</sup> Under certain conditions, the presence of free chlorine and other oxidizing agents will cause premature membrane failure. Dow Water & Process Solutions recommends removing residual free chlorine using pretreatment, prior to membrane exposure. Please refer to the FILMTEC™ Technical Manual for more information.

## Important Start-Up Information

Normally, new elements are cleaned prior to initial use. The cleaning procedure should be based on the application for which the elements are to be used. If cleaning with formulated agents is not available, an alkaline wash with a wetting agent is recommended prior to initial use. Please refer to [Dow Food & Dairy Cleaning Guide, form 609-00077](#) for more information.

Avoid any abrupt pressure or cross flow variations on the spiral elements during start-up, shutdown, cleaning or other sequences to prevent possible membrane damage. During startup, a gradual change from a standstill to operating state is recommended as follows:

- Feed pressure should be increased gradually over a 30-60 second time frame.
- Before initiating cross-flow at high permeate flux conditions (e.g., start-up with high temperature water), the set operating pressure should be maintained for 5-10 minutes.
- Cross-flow velocity at set operating point should be achieved gradually over 15-20 seconds.
- Avoid permeate-side backpressure at all times.
- Any concentrate or permeate obtained from the first hour of operation should be discarded.

### General Information :

- Keep elements moist at all times after initial wetting.
- To control the spread of biological growth during system shutdowns, it is recommended that elements be immersed in a preservative solution.

### Warranty Information :

Reference warranty document: [Dow Specialty Membrane Prorated Element Warranty](#). Before use or storage, review these additional resources for important information:

## Regulatory Note

These membranes may be subject to drinking water application restrictions in some countries; please check the application status before use and sale.

## Product Stewardship

Dow has a fundamental concern for all who make, distribute, and use its products, and for the environment in which we live. This concern is the basis for our product stewardship philosophy by which we assess the safety, health, and environmental information on our products and then take appropriate steps to protect employee and public health and our environment. The success of our product stewardship program rests with each and every individual involved with Dow products—from the initial concept and research, to manufacture, use, sale, disposal, and recycle of each product.

## Customer Notice

Dow strongly encourages its customers to review both their manufacturing processes and their applications of Dow products from the standpoint of human health and environmental quality to ensure that Dow products are not used in ways for which they are not intended or tested. Dow personnel are available to answer your questions and to provide reasonable technical support.

### Contact Dow Water & Process Solutions:

North America: 1-800-447-4369  
Latin America: (+55) 11-5188-9222  
Europe: +800-3-694-6367  
Pacific: +800 7776 7776  
China: +400 889-0789

[www.dowwaterandprocess.com](http://www.dowwaterandprocess.com)

Notice: All information set forth herein is for informational purposes only. This information is general information and may differ from that based on actual conditions. The use of this product in and of itself does not necessarily guarantee the removal of cysts and pathogens from water. Effective cyst and pathogen reduction is dependent on the complete system design and on the operation and maintenance of the system.

**NOTICE:** No freedom from infringement of any patent owned by Dow or others is to be inferred. Because use conditions and applicable laws may differ from one location to another and may change with time, Customer is responsible for determining whether products and the information in this document are appropriate for Customer's use and for ensuring that Customer's workplace and disposal practices are in compliance with applicable laws and other government enactments. The product shown in this literature may not be available for sale and/or available in all geographies where Dow is represented. The claims made may not have been approved for use in all countries. Dow assumes no obligation or liability for the information in this document. References to "Dow" or the "Company" mean the Dow legal entity selling the products to Customer unless otherwise expressly noted. NO WARRANTIES ARE GIVEN; ALL IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE ARE EXPRESSLY EXCLUDED.

