


# DuPont™ Cyrel® 1000 ECDLF

## State-of-the-Art Exposure, Dryer & Light Finisher



[View Hi Res. Image](#)

### DuPont™ Cyrel® 1000 ECDLF

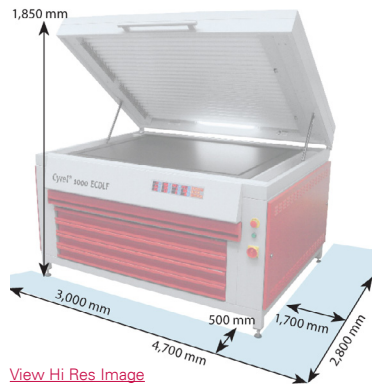

[View Hi Res. Image](#)

### Floor Plan



Play Video



Download latest version

[DuPont Packaging Graphics](#) continues to be a global technology leader in the development and supply of flexographic printing systems. Our R&D team continues to develop innovative new solutions to help our customers expand their business by taking advantage of new and profitable opportunities in the growing flexographic packaging market. The DuPont Packaging Graphics portfolio of products includes DuPont™ Cyrel® brand photopolymer plates ([analog](#) and [digital](#)), Cyrel® platemaking equipment, [Cyrel® round sleeves](#), [Cyrel® plate mounting systems](#) and the revolutionary [Cyrel® FAST thermal system](#).

DuPont™ Cyrel® Systems: Higher quality at high speed.

**The DuPont™ Cyrel® 1000 ECDLF is designed with customer needs in mind; it is easy to install, support, maintain and operate. It is robust, extremely cost effective and reliable.**

### DuPont™ Cyrel® 1000 ECDLF

#### Benefits

- Maximum plate size 36" x 48" (900 x 1,200 mm)
- Clamshell design
- Anodized temperature controlled exposure bed
- Light integrator controlled exposure
- All-in-one exposure, dryer & light finisher
- Optimum productivity

#### Product Features

DuPont™ Cyrel® 1000 ECDLF exposes, dries, post-exposes and finishes high quality photopolymer plates up to a format of 36" x 48" (900 x 1,200 mm).

The Exposure section is a clamshell design holding 24 UV-A fluorescent tubes with built-in reflectors. One yellow control tube illuminates the exposure bed for inspecting of the plate surface. Unique to this exposure unit is the anodized temperature controlled bed, closed loop system that controls the exposure bed temperature, which translates into predictable and consistent exposures. The unit is fitted with a light integrator that compensates for the decrease in light output

as the tubes age. To meet the demanding needs of high quality plates the user can easily customize the 20 basic exposure set-ups.

Each tube is constantly monitored by a photo-sensor. If the light emission of one or more tubes decreases below a set point, the user is alerted. There are three counters imbedded in the PLC to keep track of the number of hours the UV-A and UV-C tubes have been in operation.

The four dryer drawers are located beneath the Light Finisher section. There is one timer per dryer drawer for regulating the temperature. Automatic blowers on both dryer drawers further control the set temperature. The exhaust airflow is monitored by a safety sensor.

The Post Exposure and Light Finisher section hold 19 UV-C and 20 UV-A tubes. The PLC allows the user to perform post exposure and finishing in a preferred sequence, or simultaneously. The post exposure and finisher section has 20 basic set-ups that can be easily customized by the user.

# DuPont™ Cyrel® 1000 ECDLF

## State-of-the-Art Exposure, Dryer & Light Finisher

Technical Data		
General	Details	Other Notes
<b>Equipment Name</b>	DuPont™ Cyrel® 1000 ECDLF	Cooled exposure, dryer, post exposure and light finisher
<b>SAP Article Number</b>	D11552085	
<b>Plate Thickness</b>	0.019" to 0.27"	0.5 mm to 7.0 mm
<b>Max. Nominal Plate Width</b>	36" (900 mm)	
<b>Max. Nominal Plate Length</b>	48" (1,200 mm)	
<b>UV-A Tubes Wave Length</b>	360 nm – 380 nm	24 tubes (Exposure); 20 tubes (Light Finisher)
<b>UV-C Tubes Wave Length</b>	254 nm	19 tubes (Light Finisher)
<b>Electrical (Field Configurable)</b>	370 / 440 Volt – 50 / 60 hz 208 / 240 Volt – 50 / 60 hz	3Ph / N / PE 3Ph / PE
<b>Power (nominal)</b>	9.5 kW	
<b>Current (Nominal Load)</b>	15 Amp @ 400 Volt; 28 Amp @ 230 Volt	
<b>Connecting Wires</b>	400 Volt configuration; 230 Volt configuration	5 x 2.5 mm <sup>2</sup> ; 4 x 6 mm <sup>2</sup>
<b>Exhaust (Light Finisher)</b>	Ø 5.5" (140 mm)	800 m <sup>3</sup> / h-470.9 scfm (min)
<b>Exhaust (Dryer)</b>	Ø 2.36" (60 mm)	100 m <sup>3</sup> / h-58.86 scfm (min)
<b>Environmental Data</b>	Temperature range: 63°F to 82°F (17°C to 28°C)	Relative humidity from 20% to 80% non-condensing
<b>Compressed Air Supply</b>	7 bar minimum	
<b>Dimensions</b>	<b>Uncrated</b>	<b>Crated</b>
<b>L</b>	61.1" (1,550 mm)	65.0" (1,650 mm)
<b>W</b>	70.9" (1,800 mm)	74.8" (1,900 mm)
<b>H</b>	42.9" (1,090 mm)	59.1" (1,500 mm)
<b>H - open</b>	72.9" (1,850 mm)	
<b>Weight</b>	1,433 lbs (650 kg)	2,028 lbs (920 kg)
<b>Color</b>	DuPont Grey & DuPont Red	

For more information on DuPont™ Cyrel® or other DuPont Packaging Graphics products, please contact your local representative:

[www.cyrel.com/na](http://www.cyrel.com/na)

### United States

DuPont Packaging Graphics  
Chestnut Run Plaza, Bldg. 702  
974 Centre Road  
Wilmington, DE 19805  
800-345-9999

### Canada

DuPont Packaging Graphics  
1919 Minnesota Court  
Mississauga, ON L5N 0C9  
Canada  
905-816-3238