


DuPont™ Cyrel® 1000 ECDLF

State-of-the-Art Exposure, Dryer & Light Finisher



DuPont™ Cyrel® 1000 ECDLF

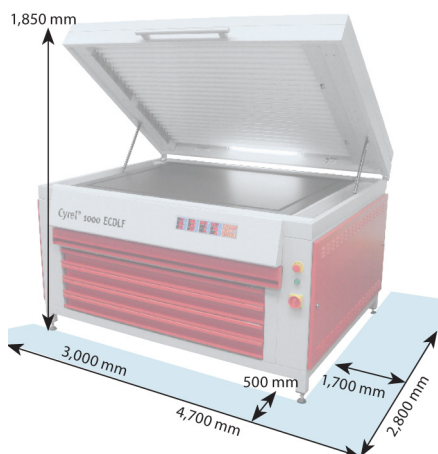

Floor Plan

DuPont Packaging Graphics continues to be a global technology leader in the development and supply of flexographic printing systems. Our R&D team continues to develop innovative new solutions to help our customers expand their business by taking advantage of new and profitable opportunities in the growing flexographic packaging market. The DuPont Packaging Graphics portfolio of products includes DuPont™ Cyrel® brand photopolymer plates (analog and digital), Cyrel® platemaking equipment, Cyrel® round sleeves, Cyrel® plate mounting systems and the revolutionary Cyrel® FAST thermal system.

DuPont™ Cyrel® Systems: Higher quality at high speed.

The DuPont™ Cyrel® 1000 ECDLF is designed with customer needs in mind; it is easy to install, support, maintain and operate. It is robust, extremely cost effective and reliable.

Benefits

- Maximum plate size 36" x 48" (900 x 1,200 mm)
- Clamshell design
- Anodized temperature controlled exposure bed
- Light integrator controlled exposure
- All-in-one exposure, dryer & light finisher
- Optimum productivity

Product Features

DuPont™ Cyrel® 1000 ECDLF exposes, dries, post-exposes and finishes high quality photopolymer plates up to a format of 36" x 48" (900 x 1,200 mm).

The Exposure section is a clamshell design holding 24 UV-A fluorescent tubes with built-in reflectors. One yellow control tube illuminates the exposure bed for inspecting of the plate surface. Unique to this exposure unit is the anodised temperature controlled bed, closed loop system that controls the exposure bed temperature, which translates into predictable and consistent exposures. The unit is fitted with a light integrator that compensates for the decrease in light output as the tubes age. To meet the demanding needs of high quality plates the user can easily customize the 20 basic exposure set-ups.

Each tube is constantly monitored by a photo-sensor. If the light emission of one or more tubes decreases below a set point, the user is alerted. There are three counters imbedded in the PLC to keep track of the number of hours the UV-A and UV-C tubes have been in operation.

The four dryer drawers are located beneath the Light Finisher section. There is one timer per dryer drawer for regulating the temperature. Automatic blowers on both dryer drawers further control the set temperature. The exhaust airflow is monitored by a safety sensor.

The Post Exposure and Light Finisher section hold 19 UV-C and 20 UV-A tubes. The PLC allows the user to perform post exposure and finishing in a preferred sequence, or simultaneously. The post exposure and finisher section has 20 basic set-ups that can be easily customized by the user.





DuPont™ Cyrel® 1000 ECDLF

State-of-the-Art Exposure, Dryer & Light Finisher

Technical Data		
General	Details	Other Notes
Equipment Name	DuPont™ Cyrel® 1000 ECDLF	Cooled exposure, dryer, post exposure and light finisher
SAP Article Number	D11552085	
Plate Thickness	0.019" to 0.27"	0.5 mm to 7.0 mm
Max. Nominal Plate Width	36" (900 mm)	
Max. Nominal Plate Length	48" (1,200 mm)	
UV-A Tubes Wave Length	360 nm – 380 nm	24 tubes (Exposure) 20 tubes (Light Finisher)
UV-C Tubes Wave Length	254 nm	19 tubes (Light Finisher)
Electrical (Field Configurable)	370 / 440 Volt – 50 / 60 hz 208 / 240 Volt – 50 / 60 hz	3Ph / N / PE 3Ph / PE
Power (nominal)	9.5 kW	
Current (Nominal Load)	15 Amp @ 400 Volt 28 Amp @ 230 Volt	
Connecting Wires	400 Volt configuration 230 Volt configuration	5 x 2.5 mm ² 4 x 6 mm ²
Exhaust (Light Finisher)	Ø 5.5" (140 mm)	800 m ³ / h-470.9 scfm (min)
Exhaust (Dryer)	Ø 2.36" (60 mm)	100 m ³ / h-58.86 scfm (min)
Environmental Data	Temperature range: 63°F to 82°F (17°C to 28°C)	Relative humidity from 20% to 80% non-condensing
Compressed Air Supply	7 bar minimum	
Dimensions	Uncrated	Crated
L	61.1" (1,550 mm)	65.0" (1,650 mm)
W	70.9" (1,800 mm)	74.8" (1,900 mm)
H	42.9" (1,090 mm)	59.1" (1,500 mm)
H - open	72.9" (1,850 mm)	
Weight	1,433 lbs (650 kg)	2,028 lbs (920 kg)
Color	DuPont Grey & DuPont Red	

For more information on DuPont™ Cyrel® or other DuPont Packaging Graphics products, please contact your local representative:

United States

DuPont Packaging Graphics
Chestnut Run Plaza, Bldg. 702
974 Centre Road
Wilmington, DE 19805
800-345-9999

Canada

DuPont Packaging Graphics
1919 Minnesota Court
Mississauga, ON L5N 0C9
Canada
905-816-3238

www.cyrel.com/na

© 2013 DuPont. All rights reserved. The DuPont Oval Logo, DuPont™ and Cyrel® are registered trademarks or trademarks of E.I. du Pont de Nemours and Company or its affiliates. All technical information set out herein is provided free of charge and is based on technical data, which DuPont believes to be reliable. It is intended for use by persons having skill, at their own discretion and risk. The handling precaution information contained herein is given with the understanding that those using it will satisfy themselves that their particular conditions of use present no health or safety hazards. Since conditions of product use are outside of our control we make no warranties express or implied in relation thereto and therefore cannot accept any liability in connection with any use of this information. Nothing herein is to be taken as a license to operate under, or a recommendation to infringe any patents.