


MOLYKOTE®

DUPONT™

Smart Lubrication[™]
for vehicle powertrain systems

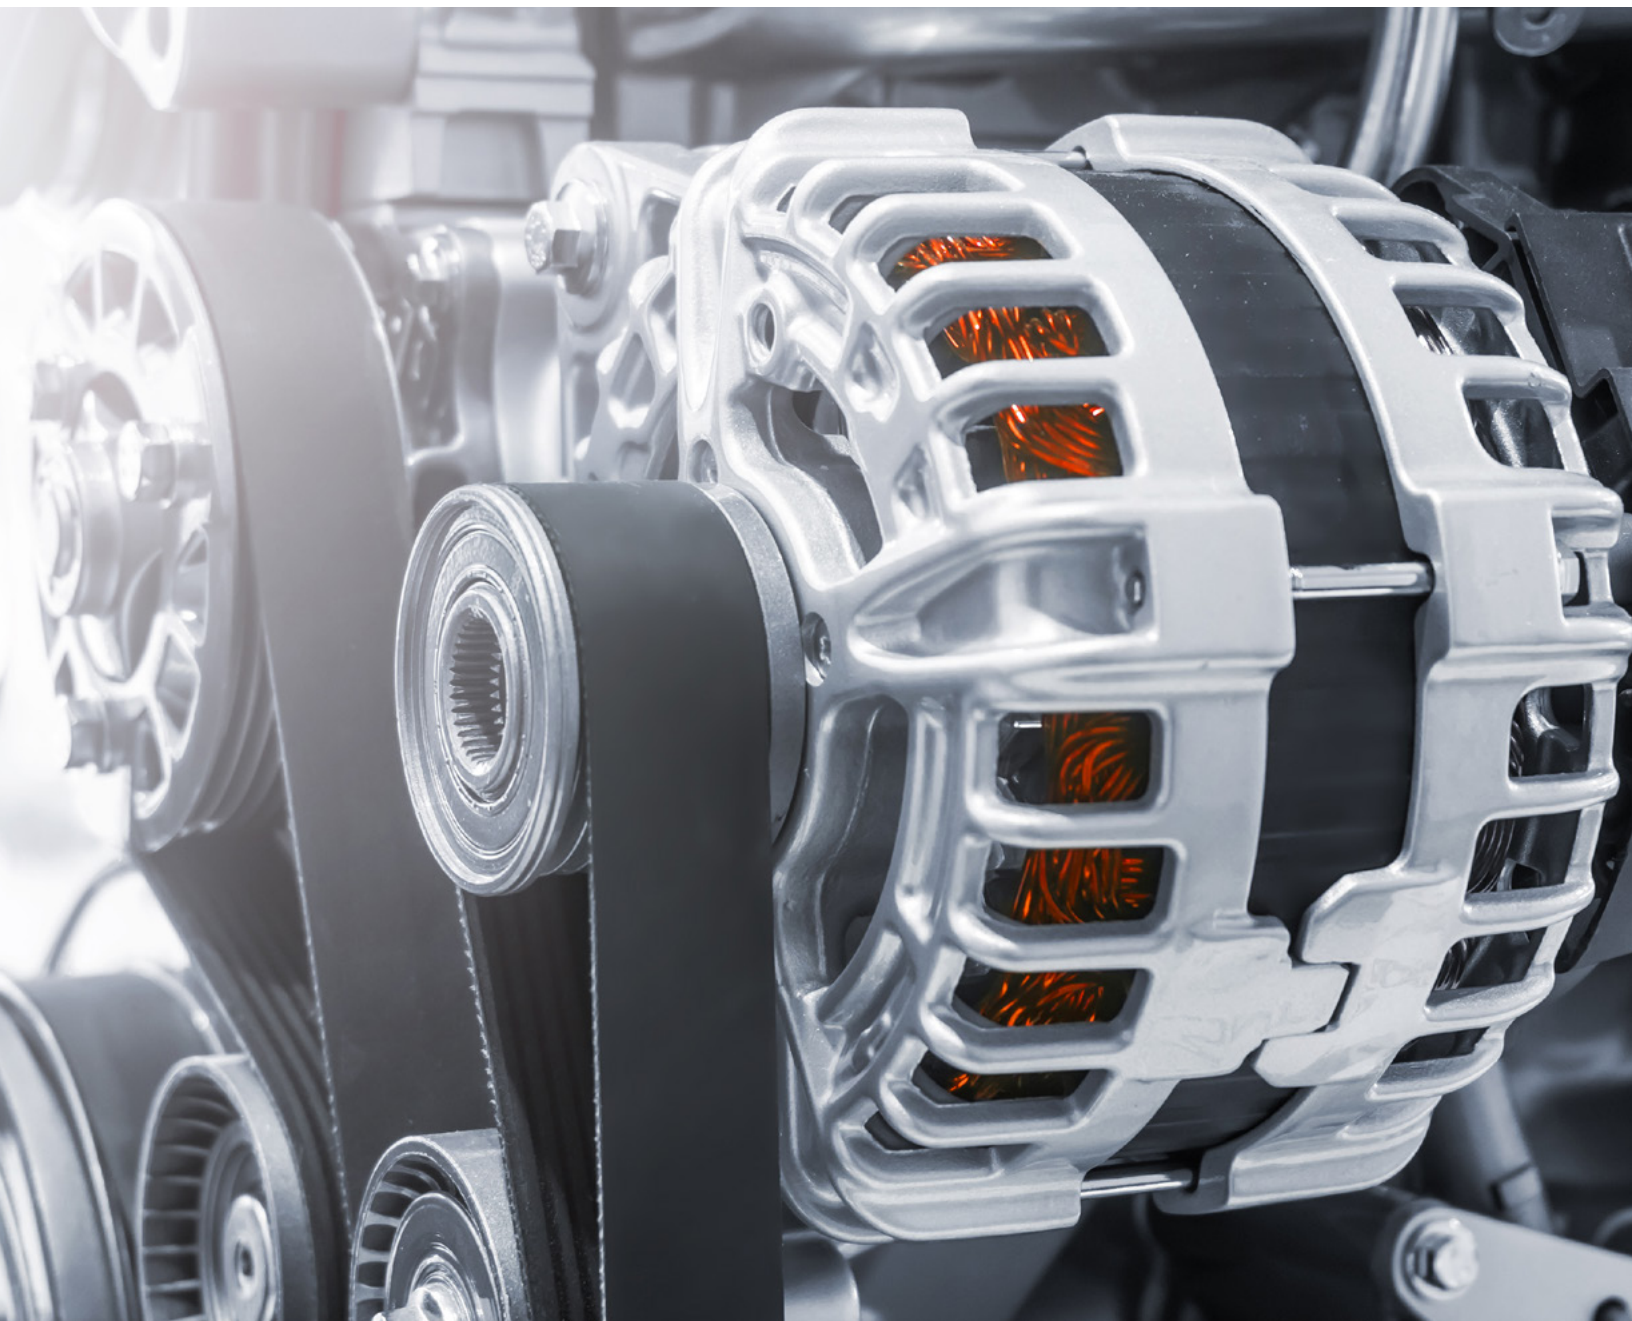


Design for increasing propulsion efficiency

Meet your critical lubrication requirements for advanced powertrain design with MOLYKOTE® brand specialty lubricants from DuPont. With our in-depth expertise, a heritage of innovation, problem-solving collaboration, and reliable global supply and technical support, these high-performance *Smart Lubrication*™ solutions are precisely formulated and application-matched to help you achieve:

- **Energy efficiency** with reduced friction losses and increased wear control
- **Comfort and design** with enhanced smoothness and reduced noise and vibration
- **Safety** with added component reliability, less wear and more corrosion resistance
- **Sustainability** with increased process efficiency and durable component service life

Design for increasing propulsion efficiency with a choice of MOLYKOTE® brand *Smart Lubrication*™ solutions:

- **Greases** with special additives to resist water washout, evaporation or oxidation
- **Silicone compounds** for light-load lubricating and sealing in extreme temperatures
- **Anti-seize pastes** with high levels of lubricating solids for heavy loads and slow speeds
- **Anti-friction coatings** for clean dry-film lubrication to control friction, wear and noise
- **Solids and powders** for plastics lubrication and specialized friction-control additives
- **Oils and dispersions** with performance additives in synthetic or mineral blends

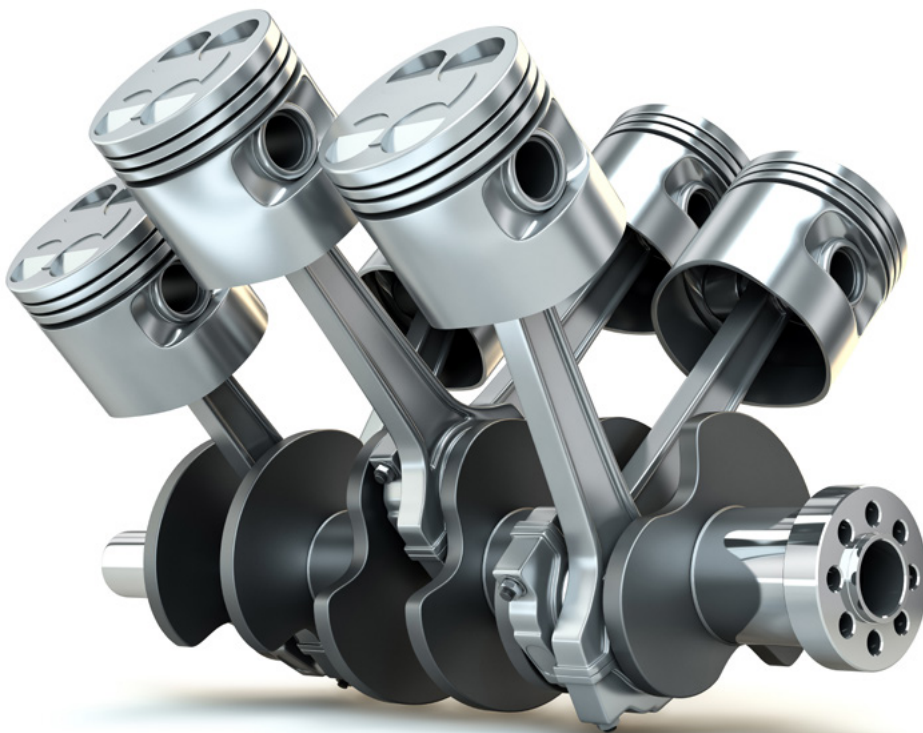

Innovate with smart science

Proven, effective MOLYKOTE® brand *Smart Lubrication*™ solutions can help you meet vehicle powertrain systems design goals for propulsion efficiency innovation:

Reduce engine and driveline friction, wear and NVH

- Piston skirts and rings
- Camshafts, tappets
- Dual-mass flywheels (DMFW)
- Transmission actuators
- Constant-velocity joints (CVJs)
- Ball joints, universal joints

Provide lifetime lubrication for difficult-to-access components

- Alternator and fan clutch bearings
- Starter motor gears, over-running clutches
- Actuators

Insulate and protect against moisture


- Glow plug controllers
- Ignition switches, spark plug boots

Reduce squeaks, rattles, unwanted noise and vibrations

- HVAC switches, vents
- Small motors and gears
- Compressors

Ensure proper assembly, nondestructive disassembly

- Assembly fasteners, bolts, screws
- Metal intake/exhaust gaskets

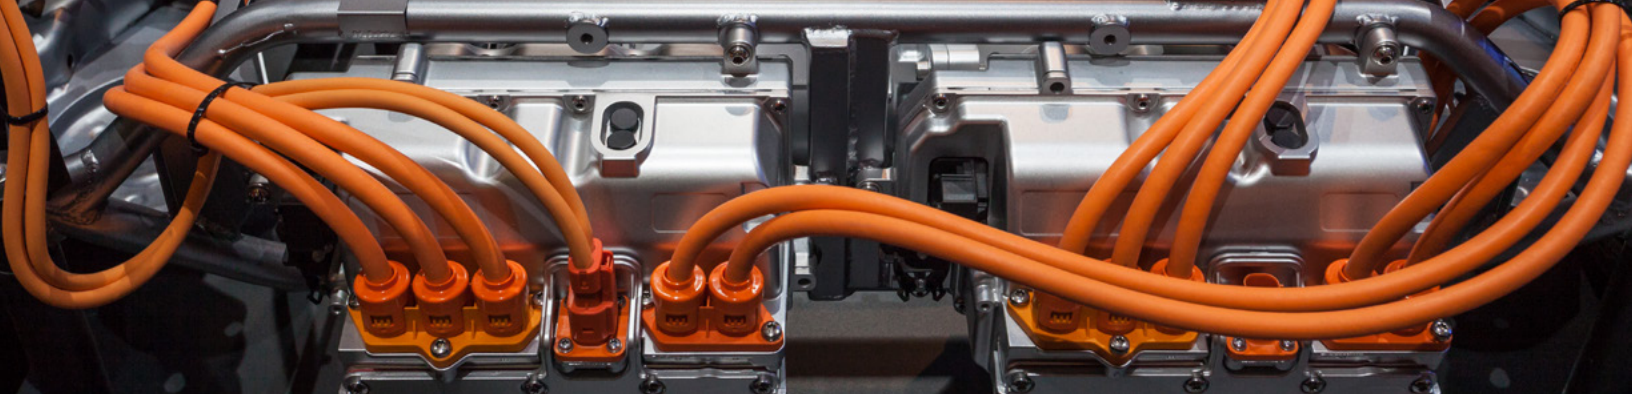

Smart Lubrication™ selection guide: Powertrain applications

APPLICATION	DESIGN NEED	POTENTIAL SOLUTION(S)	PRODUCT HIGHLIGHTS
Alternator, fan clutch bearings	Provide lifetime lubrication with reduced friction, wear and noise	MOLYKOTE® FS-841 Grease	Low-consistency fluorosilicone grease for solvent-resistant, high-speed lubrication
Electric motor bearings	Reduced friction, noise and wear	MOLYKOTE® BG-20 Synthetic Bearing Grease	Synthetic grease with extreme-pressure and anti-wear additives for metal-metal lubrication
Dual-mass flywheels (DMFW)	Reduced friction with vibration damping	MOLYKOTE® G-3000 Grease	Synthetic grease with high shear resistance and good temperature stability reduces vibration and noise
Pistons and rings	Reduced friction for improved energy efficiency	MOLYKOTE® D-10-GBL Anti-Friction Coating	High-viscosity, heat-cured coating for engine components
		MOLYKOTE® D-7409 Anti-Friction Coating	Heat-cured MoS ₂ -based AFC for superior wear resistance
		MOLYKOTE® D-88-GBL Anti-Friction Coating	Heat-cured coating for aluminum pistons and cylinder liners
Camshafts, tappets, engine components	Reduced friction, wear and noise	MOLYKOTE® D-7409 Anti-Friction Coating	Heat-cured MoS ₂ -based AFC for superior wear resistance
Intake/exhaust gaskets	Reduced noise and gasket disassembly damage	MOLYKOTE® D-7620 Anti-Friction Coating	Heat-cured MoS ₂ -based AFC designed for roll-coating flat metal components
		MOLYKOTE® D-321 R Anti-Friction Coating	Air-drying bonded lubricant with excellent heat-aging resistance under heavy loads
Starter motor gears, spline shaft, clutch	Reduced friction, wear and noise	MOLYKOTE® G-1021 Grease	Synthetic-oil-based grease for extremely low startup and running frictional resistance
		MOLYKOTE® 3400A Anti-Friction Coating	Heat-cured dry-film lubricant with excellent adhesion, corrosion protection and low friction
		MOLYKOTE® 33L Extreme Low Temperature Grease	Silicone-based grease with excellent low-temperature resistance
EGR valve	Improved fuel, oil and solvent resistance	MOLYKOTE® HP-870 Grease	Solvent-resistant, fluorinated grease with good high-temperature stability and aging
		MOLYKOTE® D-321 R Anti-Friction Coating	Air-drying bonded lubricant with excellent heat-aging resistance under heavy loads
Spark plug boots, ignition switches	Improved water resistance	MOLYKOTE® G-5008 Dielectric Grease	Silicone grease designed for rubber and ceramic pairings
Glow plug controllers	Improved water and corrosion resistance	MOLYKOTE® 4 Electrical Insulating Compound	Silicone-based compound with semi-flowable consistency; exhibits excellent dielectric strength, water repellency, oxidative resistance
Electronic transmission actuator	Reduced friction and corrosion	MOLYKOTE® BR-2 Plus High Performance Grease	Mineral-oil-based grease with solid lubricants and extreme-pressure additives
CV joints, universal joints	Reduced friction and wear	MOLYKOTE® G-4700 Extreme Pressure Synthetic Grease	NLGI GC-LB-certified extreme-pressure grease for heavy loads and vibrations
Engine bolts, fasteners	Improved assembly with proper tightening torque	MOLYKOTE® D-321 R Anti-Friction Coating	Air-drying bonded lubricant with excellent heat-aging resistance under heavy loads
		MOLYKOTE® G-n Metal Assembly Paste	Mineral-oil-based paste with solid lubricants for very low coefficient of friction

NOTE: These are proven, effective MOLYKOTE® brand *Smart Lubrication*™ solutions for vehicle powertrain systems design. Contact your MOLYKOTE® representative for product options to meet specialized requirements.



Sustainable design solutions

Enhance your design sustainability with MOLYKOTE® brand *Smart Lubrication*™ solutions from DuPont. To meet key powertrain design needs, these advanced specialty lubrication technologies can be custom-formulated for specified performance characteristics, regulatory standards and process requirements. Raw materials include base oils such as silicone, mineral or polyalphaolefin (PAO); solid lubricants such as molybdenum disulfide (MoS₂) and polytetrafluoroethylene (PTFE); thickeners such as lithium; and various performance additives to inhibit rust, resist wear or withstand extreme pressure.

- MOLYKOTE® brand anti-friction coatings (AFCs) provide bonded lubrication for pistons and rings to help increase fuel efficiency and reduce emissions.
- MOLYKOTE® brand lubricants help reduce friction, wear and corrosion on dual-mass flywheels, constant-velocity joints and starter motor gears and over-running clutches.

Smart Lubrication™ solutions for other vehicle systems

In addition to the MOLYKOTE® brand *Smart Lubrication*™ solutions for vehicle powertrain design featured in this selection guide, DuPont also offers proven, effective lubricants for these vehicle systems:

- Chassis and brakes
- Electrical
- Exterior
- Interior



About MOLYKOTE® Specialty Lubricants

For more than 70 years, customers around the world have trusted the MOLYKOTE® brand for performance and expertise to solve or prevent virtually any lubrication problem and to save energy. Available through a global network of more than 3,000 channel partners, MOLYKOTE® brand lubricants – which include well over 500 anti-friction coatings, compounds, dispersions, greases, oils and fluids, and pastes – serve the automotive market and industrial/maintenance, repair and overhaul (MRO) markets. To learn more about our extensive product and service offering or to locate a distributor, visit molykote.com.



Contact us

MOLYKOTE® has Contact Centers around the globe. Find the phone number for the center nearest you at www.dupont.com/molykotecontact.



DuPont™, the DuPont Oval Logo, and all trademarks and service marks denoted with ™, SM or ® are owned by affiliates of DuPont de Nemours, Inc. unless otherwise noted.

© 2019-2022 DuPont.

The information set forth herein is furnished free of charge and is based on technical data that DuPont believes to be reliable and falls within the normal range of properties. It is intended for use by persons having technical skill, at their own discretion and risk. This data should not be used to establish specification limits nor used alone as the basis of design. Handling precaution information is given with the understanding that those using it will satisfy themselves that their particular conditions of use present no health or safety hazards. Since conditions of product use and disposal are outside our control, we make no warranties, express or implied, and assume no liability in connection with any use of this information. As with any product, evaluation under end use conditions prior to specification is essential. Nothing herein is to be taken as a license to operate or a recommendation to infringe on patents.