

MOLYKOTE®

DUPONT™

Smart Lubrication[™]
for vehicle exterior design



Design for lightweight styling durability

Meet your critical lubrication requirements for advanced vehicle exterior design with MOLYKOTE® brand specialty lubricants from DuPont. With our in-depth expertise, a heritage of innovation, problem-solving collaboration, and reliable global supply and technical support, these high-performance *Smart Lubrication*™ solutions are precisely formulated and application-matched to help you achieve:

- **Energy efficiency** with reduced friction losses and increased wear control
- **Comfort and design** with enhanced smoothness and reduced noise and vibration
- **Safety** with added component reliability, less wear and more corrosion resistance
- **Sustainability** with increased process efficiency and durable component service life

Design for optimized handling performance with a choice of MOLYKOTE® brand *Smart Lubrication*™ solutions:

- **Greases** with special additives to resist water washout, evaporation or oxidation
- **Silicone compounds** for light-load lubricating and sealing in extreme temperatures
- **Anti-seize pastes** with high levels of lubricating solids for heavy loads and slow speeds
- **Anti-friction coatings** for clean dry-film lubrication to control friction, wear and noise
- **Solids and powders** for plastics lubrication and specialized friction-control additives
- **Oils and dispersions** with performance additives in synthetic or mineral blends

Innovate with smart science

Proven, effective MOLYKOTE® brand *Smart Lubrication*™ solutions can help you meet vehicle exterior design goals for durable styling innovation:

Reduce mass without compromising durability

- Sunroof, panoramic roof slides
- Sliding door, liftgate rails
- Adaptive front lighting systems (AFS) actuators and guides

Reduce squeaks, rattles and unwanted noise

- Mirrors, antennas
- Body-control actuators
- Windshield wiper motors and levers
- Control/release cables

Protect and lubricate vehicle security and access

- Door entry, latching and locking systems
- Hood, trunk, liftgate and sliding door opening and latching mechanisms






Smart Lubrication™ selection guide: Exterior applications

APPLICATION	DESIGN NEED	POTENTIAL SOLUTION(S)	PRODUCT HIGHLIGHTS
Actuators, small motors	Reduced friction, wear and noise	MOLYKOTE® YM-102 Grease	Synthetic grease for lubrication of plastic components
		MOLYKOTE® EM-50L Grease	Synthetic grease with good noise-damping properties
AFS headlamp actuator	Extended lubricant service life	MOLYKOTE® L-8030 Lubricant	Solid lubricants in fluorinated solvent form quick-drying, nontacky lubricating film
Linear guides and slides	Reduced friction, wear and noise	MOLYKOTE® AI-6159 Grease	Synthetic grease with good lubrication for glass-fiber-reinforced plastics
		MOLYKOTE® G-1050 Grease	Synthetic grease with white solids beneficial for noise reduction
Locks, latches and levers	Protect against moisture, corrosion and seizure	MOLYKOTE® D-708 Anti-Friction Coating	Heat-cured, PTFE-based AFC with excellent corrosion protection
		MOLYKOTE® 3400A LF Anti-Friction Coating	Heat-cured, MoS ₂ -based AFC with excellent lubrication and corrosion protection
		MOLYKOTE® D-7409 Anti-Friction Coating	Heat-cured, MoS ₂ -based AFC with excellent lubrication properties
Mirror and door assemblies	Reduce squeaks and rattles	MOLYKOTE® EM-60L Grease	Synthetic grease suitable for low-temperature lubrication of plastics
Mirror adjustment	Improve service life, wear and smoothness	MOLYKOTE® E Paste	Synthetic paste with several types of special solid lubricants
		MOLYKOTE® YM-103 Grease	Synthetic grease with good load-carrying capacity and wear resistance
Sunroof/moonroof guide tracks	Reduced friction and wear; improved smoothness	MOLYKOTE® G-1023 Grease	Synthetic grease with good lubricity for glass-fiber-reinforced plastics
		MOLYKOTE® EM-50L Grease	Synthetic grease with good noise-damping properties
		MOLYKOTE® PG-75 Grease	Semi-synthetic grease for plastic-plastic and plastic-metal combinations
Wiper system motors	Extended lubricant service life	MOLYKOTE® MI-60 Grease	Synthetic PAO-based grease with solid lubricants for excellent plastics lubricity
Wiper lever system	Reduce wear and noise	MOLYKOTE® 111 Silicone Compound	Translucent silicone with excellent water resistance
Control/release cables	Reduce friction, sticking and wear	MOLYKOTE® 33 Light Extreme Low Temperature Grease	Silicone-based grease with excellent low-temperature resistance
		MOLYKOTE® G-72 Plastic Grease	Silicone-based grease with good plastic compatibility
Door/sunroof weatherseals	Improved sealing with less wear and sticking	MOLYKOTE® L-8030 Lubricant	Solid lubricants in fluorinated solvent form quick-drying, nontacky lubricating film
		MOLYKOTE® D-96 Anti-Friction Coating	Water-based AFC for squeak and stick-slip elimination
Fasteners, screws, bolts	Improved assembly with proper tightening torque	MOLYKOTE® D-7405 Anti-Friction Coating	Heat-cured AFC with solid lubricants for metal-plastic and metal-metal lubrication
		MOLYKOTE® D-708 Anti-Friction Coating	Heat-cured, PTFE-based AFC with excellent corrosion protection

NOTE: These are proven, effective MOLYKOTE® brand *Smart Lubrication*™ solutions for vehicle exterior design. Contact your MOLYKOTE® representative for product options to meet specialized requirements.

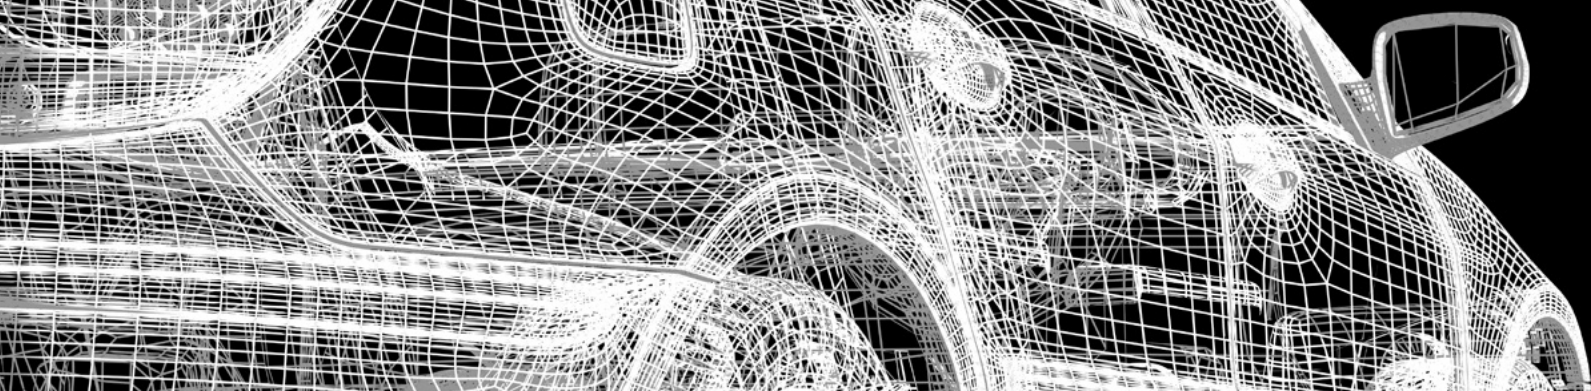

Sustainable design solutions

Enhance your design sustainability with MOLYKOTE® brand *Smart Lubrication™* solutions from Dow Corning. To meet key exterior design needs, these advanced specialty lubrication technologies can be custom-formulated for specified performance characteristics, regulatory standards and process requirements. Raw materials include base oils such as silicone, mineral or polyalphaolefin (PAO); solid lubricants such as molybdenum disulfide (MoS₂) and polytetrafluoroethylene (PTFE); thickeners such as lithium; and various performance additives to inhibit rust, resist wear or withstand extreme pressure.

- MOLYKOTE® greases and anti-seize pastes add operating smoothness and reduce corrosion on sunroof guides, sliding door tracks, and latching or locking mechanisms.
- MOLYKOTE® anti-friction coatings speed clean assembly, ensure proper tightening and add long rust prevention when used to pre-coat threaded fasteners.

Smart Lubrication™ solutions for other vehicle systems

In addition to the MOLYKOTE® brand *Smart Lubrication™* solutions for vehicle exterior design featured in this selection guide, DuPont also offers proven, effective lubricants for these vehicle systems:

- Chassis and brakes
- Electrical
- Interior
- Powertrain



About MOLYKOTE® Specialty Lubricants

For more than 70 years, customers around the world have trusted the MOLYKOTE® brand for performance and expertise to solve or prevent virtually any lubrication problem and to save energy. Available through a global network of more than 3,000 channel partners, MOLYKOTE® brand lubricants – which include well over 500 anti-friction coatings, compounds, dispersions, greases, oils and fluids, and pastes – serve the automotive market and industrial/maintenance, repair and overhaul (MRO) markets. To learn more about our extensive product and service offering or to locate a distributor, visit molykote.com.



Contact us

MOLYKOTE® has Contact Centers around the globe. Find the phone number for the center nearest you at www.dupont.com/molykotecontact.



DuPont™, the DuPont Oval Logo, and all trademarks and service marks denoted with ™, SM or ® are owned by affiliates of DuPont de Nemours, Inc. unless otherwise noted.

© 2019-2022 DuPont.

The information set forth herein is furnished free of charge and is based on technical data that DuPont believes to be reliable and falls within the normal range of properties. It is intended for use by persons having technical skill, at their own discretion and risk. This data should not be used to establish specification limits nor used alone as the basis of design. Handling precaution information is given with the understanding that those using it will satisfy themselves that their particular conditions of use present no health or safety hazards. Since conditions of product use and disposal are outside our control, we make no warranties, express or implied, and assume no liability in connection with any use of this information. As with any product, evaluation under end use conditions prior to specification is essential. Nothing herein is to be taken as a license to operate or a recommendation to infringe on patents.