


DuPont™ Cyrel® TDR

Premium Analogue Printing Plate for the Corrugated Board Industry

Applications

- Corrugated board
- Paper

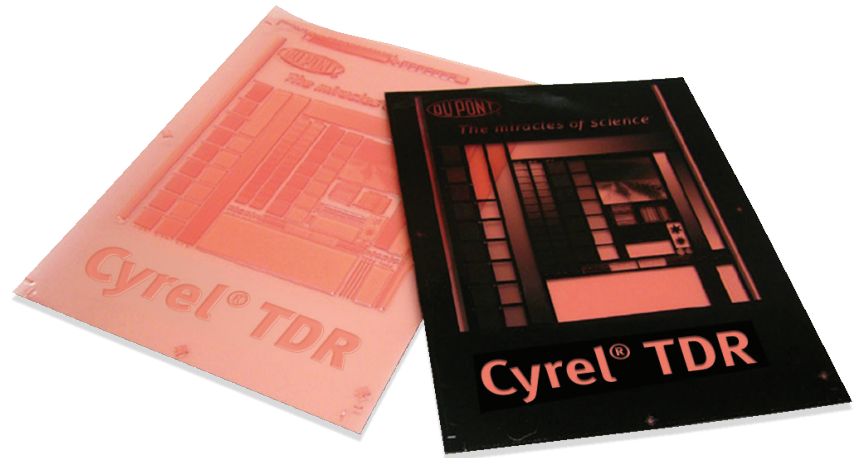

Cyrel® TDR with its tailored characteristics combines low dot gain and strong solids on any corrugated substrate. It shows least wash boarding effects even on B and coarse flutings like C-fluting. Cyrel® TDR offers easy plate making and trouble free press runs. It can be used by any printer or tradeshop seeking the best possible printing quality on corrugated substrates as well as other paper substrates printed with water-based inks.

Product Features and Benefits

- High plate making and press latitude – success under many conditions.
- Adapted shore hardness and resilience lead to the least wash boarding effect
- Good resistance towards mechanical impacts
- Requires minimum impression settings, giving good balance between solids and screens

Printing Ink and Solvent Compatibility

Cyrel® TDR offers excellent compatibility with water-based inks.

Process of Use

Expose the plate through the back to establish the floor and maximize sensitivity. Back exposure varies according to relief required. Remove the protective coversheet and expose the front of the plate. Process the plate in the Cyrel® plate processor. Finish the plate in a light finisher to eliminate surface tackiness. Post-expose the plate to ensure complete polymerisation.

Storage – Raw Material

Store unexposed plates in a cool area (4-32° C), away from direct sources of heat. Humidity control is not required. Cyrel® TDR is foam interleaved to provide maximum protection of the plate after manufacture, and during transportation and storage. Plates should be stacked flat. Plates should not be exposed to direct sunlight or excessive white light. Continuous exposure to very high ozone concentrations should be avoided.

Handling – Raw Material

Cyrel® TDR plates should be handled under UV free light; e.g. fluorescent tubes covered with amber sleeves.

Storage – Finished Plates

After printing, plates should be thoroughly cleaned with compatible solvent before storing. They may be stored on cylinders, sleeves or demounted and stored flat.

DuPont™ Cyrel® TDR

Premium Analogue Printing Plate for the Corrugated Board Industry

Technical Data

	Thickness	Durometer	Image Reproduction	Min. Positive Line Width	Min. Isolated Dot Size	Relief Depth
Cyrel® TDR 112	2.84 mm / 0.112"	38 Sh A	3 – 95% / 42 L/cm	0.175 mm / 7 mil	250 µm	1.00 mm / 0.039"
Cyrel® TDR 125	3.18 mm / 0.125"	37 Sh A	3 – 95% / 42 L/cm	0.175 mm / 7 mil	250 µm	1.0 – 1.5 mm / 0.039 – 0.059"
Cyrel® TDR 155	3.94 mm / 0.155"	36 Sh A	3 – 95% / 36 L/cm	0.35 mm / 14 mil	500 µm	1.5 – 2.0 mm / 0.059 – 0.079"
Cyrel® TDR 170	4.32 mm / 0.170"	35 Sh A	3 – 95% / 28 L/cm	0.35 mm / 14 mil	500 µm	1.5 – 2.0 mm / 0.059 – 0.079"
Cyrel® TDR 185	4.70 mm / 0.185"	35 Sh A	3 – 95% / 28 L/cm	0.35 mm / 14 mil	500 µm	1.5 – 2.5 mm / 0.059 – 0.098"
Cyrel® TDR 197	5.00 mm / 0.197"	35 Sh A	3 – 95% / 28 L/cm	0.35 mm / 14 mil	500 µm	2.5 mm / 0.098"
Cyrel® TDR 217	5.51 mm / 0.217"	34 Sh A	3 – 95% / 28 L/cm	0.35 mm / 14 mil	500 µm	2.5 mm / 0.098"
Cyrel® TDR 237	6.02 mm / 0.237"	34 Sh A	3 – 95% / 28 L/cm	0.35 mm / 14 mil	500 µm	2.5 mm / 0.098"
Cyrel® TDR 250	6.35 mm / 0.250"	33 Sh A	3 – 95% / 28 L/cm	0.35 mm / 14 mil	500 µm	2.5 mm / 0.098"

DuPont Advanced Printing brings together leading technologies and products for the printing and package printing industries. DuPont™ Cyrel® is one of the world's leading flexographic platemaking systems in digital and conventional formats, including DuPont™ Cyrel® brand photopolymer plates (analogue and digital), Cyrel® platemaking equipment, Cyrel® round sleeves, Cyrel® plate mounting systems and the revolutionary Cyrel® FAST thermal system.



cyrel.eu

For more information on DuPont™ Cyrel® or other DuPont products, please visit our website.

The information provided in this data sheet corresponds to our knowledge on the subject at the date of its publication. It may be subject to revision as new knowledge and experience becomes available. This information is not intended to substitute for any testing you may need to conduct to determine for yourself the suitability of our products for your particular purposes. Since we cannot anticipate all variations in end-use and disposal conditions, DuPont makes no warranties and assumes no liability in connection with any use of this information. It is intended for use by persons having technical skill, at their own discretion and risk. Nothing in this publication is to be considered as a license to operate under or a recommendation to infringe any patent right.

DuPont™, the DuPont Oval Logo, and Cyrel® are trademarks or registered trademarks of DuPont or its affiliates. Copyright © 2020 DuPont de Nemours Inc. All rights reserved.

PDS-EU0016-EN (10/20)