


DuPont™ Kalrez® Spectrum™ 7375 Perfluoroelastomer Parts

for gas turbine applications

High performance elastomeric solutions are often used in gas turbine applications, where operating temperatures are usually in the range of 150 °C to 300 °C and fuel can contain moisture. These conditions, coupled with potential steam generation, translate into very aggressive and demanding environments for elastomers. Kalrez® Spectrum™ 7375 perfluoroelastomer (FFKM) seals offer top tier performance in high temperature environments and exhibits superb mechanical property retention when exposed to steam/water, making it an excellent choice for gas turbine sealing applications.

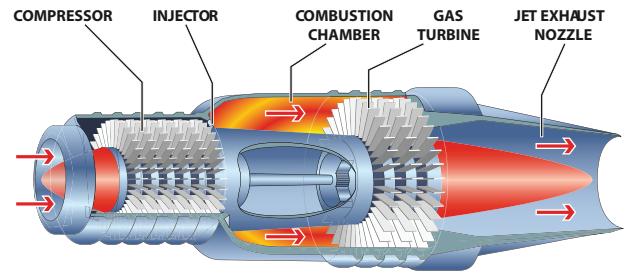

- **Chemicals:** Diesel, Steam
- **Process conditions:** 200 °C
- **Incumbent solution:** Competitive FFKM
- **Incumbent performance:** 6 months before failure

Kalrez® 7375 O-ring performance:

A leading global manufacturer of gas turbines, already using competitive FFKM O-rings, was facing sealing issues. The competitive FFKM O-ring showed signs of severe degradation during their periodic maintenance. Kalrez® Spectrum™ 7375 was introduced to this customer and, after reviewing DuPont internal testing comparing its performance to a competitive FFKM, customer specified Kalrez® Spectrum™ 7375 for use in this gas turbine application to address sealing issues and improve reliability of their equipment.

Sample from field



Used Competitive FFKM O-ring

Internal test



Competitive FFKM O-ring



Kalrez® 7375 O-ring

Visit us at kalrez.com

The information set forth herein is furnished free of charge, is based on technical data that DuPont believes to be reliable and represents typical values that fall within the normal range of properties. This information relates only to the specific material designated and may not be valid for such material used in combination with other materials or in other processes. It is intended for use by persons having technical skill, at their own discretion and risk. This information should not be used to establish specification limits nor used alone as the basis of design. Handling precaution information is given with the understanding that those using it will satisfy themselves that their conditions of use present no health or safety hazards and comply with applicable law. Since conditions of product use and disposal are outside our control, we make no warranties, express or implied, and assume no liability in connection with any use of this information. As with any product, evaluation under end use conditions prior to specification is essential. Nothing herein is to be taken as a license to operate or a recommendation to infringe on patents.

CAUTION: Do not use DuPont materials in medical applications involving implantation in the human body or contact with internal body fluids or tissues unless the material has been provided from DuPont under a written contract that is consistent with the DuPont policy regarding medical applications and expressly acknowledges the contemplated use. For further information, please contact your DuPont representative.

DuPont's sole warranty is that our products will meet our standard sales specifications in effect at the time of shipment. Your exclusive remedy for breach of such warranty is limited to refund of purchase price or replacement of any product shown to be other than as warranted. TO THE FULLEST EXTENT PERMITTED BY APPLICABLE LAW, DUPONT SPECIFICALLY DISCLAIMS ANY OTHER EXPRESS OR IMPLIED WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, OR NON-INFRINGEMENT. DUPONT DISCLAIMS LIABILITY FOR ANY SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES.

DuPont™, the DuPont Oval Logo, and all trademarks and service marks denoted with ™, ® or © are owned by affiliates of DuPont de Nemours, Inc. unless otherwise noted. © 2021 DuPont. All rights reserved.

(10/2021) Reference: KZE-A40103-00-A1021