


DUPONT™ TYVEK® FLUID APPLIED FLASHING AND JOINT COMPOUND  
(2" ONTO FACE OF WALL)

DUPONT™ SEALANT FOR TYVEK®  
FLUID APPLIED SYSTEM

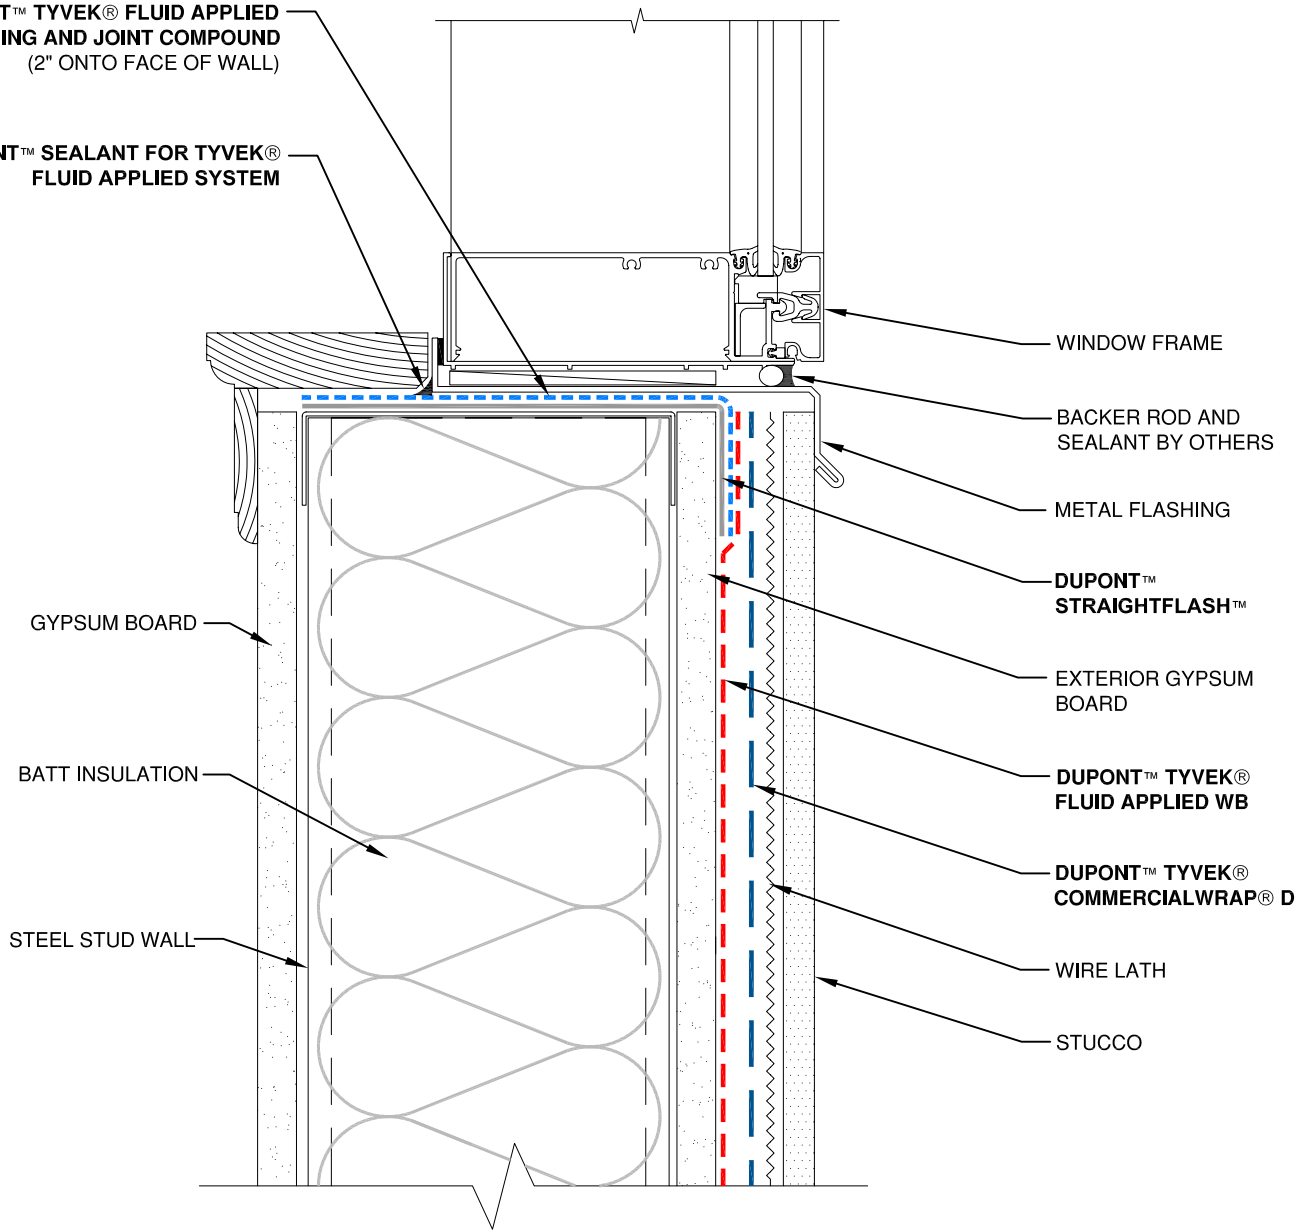

**NOTE**

- 1) INTERIOR VAPOR RETARDER MAY BE REQUIRED IN SOME REGIONS.
- 2) THIS INFORMATION IS PROVIDED BY DUPONT AS REFERENCE ONLY; PLEASE CONSULT LOCAL BUILDING CODES, REGULATIONS AND LAWS TO DETERMINE THE APPROPRIATE CONSTRUCTION METHODS AND MATERIALS NEEDED.

SCALE: NOT TO SCALE

REVISION DATE: 9/14/10

DRAWING: FA-S-W200s

**STOREFRONT WINDOW SILL - METHOD 1**

STUCCO / STEEL STUD WALL / FLUID APPLIED FLASHING



**Tyvek.**  
FLUID APPLIED WB