

DuPont™ Styrofoam™ Brand Plazamate™ XR Extruded Foam Insulation

High R-value, Tough, Versatile Insulation for Commercial Roof, Low-Temp, and Geotechnical Applications.

HFC Regulation Compliant Formulation

FEATURES/BENEFITS

Description


DuPont™ Styrofoam™ Brand Plazamate™ XR Foam Insulation is next generation in evolution of high-performance closed cell insulation that allows extra design flexibility for architects and engineers by optimizing roof thickness – reducing expensive commercial roof building alterations required for meeting the latest building and energy codes – and assists in reducing overall project costs. Styrofoam™ Brand Plazamate™ XR Foam Insulation is reusable, moisture-resistant, durable, easy to work with and offers more R per inch.

Available in compressive strength of 60 psi (415 kPa), Styrofoam™ Brand Plazamate™ XR Foam Insulation features exceptional moisture resistance and R-value* retention. Styrofoam™ Brand Plazamate™ XR resists compressive creep and fatigue, delivering long-term compressive strength and high R-value.

Ease of Use

Styrofoam™ Brand Plazamate™ XR Foam Insulation:

- Provides superior resistance to water absorption, water vapor transmission, and freeze-thaw cycling
- Ideal for low-temperature, geotechnical, high-load commercial and other in-ground or water-contact applications such as Protected Membrane Roofs, Green and Blue Roofs, Cold Storage Buildings, Amenity Decks, and many others
- Delivers long-term compressive strength in high-load applications
- Features exceptional R-value and R-value retention, in typical construction and in demanding cold, wet, humid, changing environments
- Resists compressive creep and fatigue

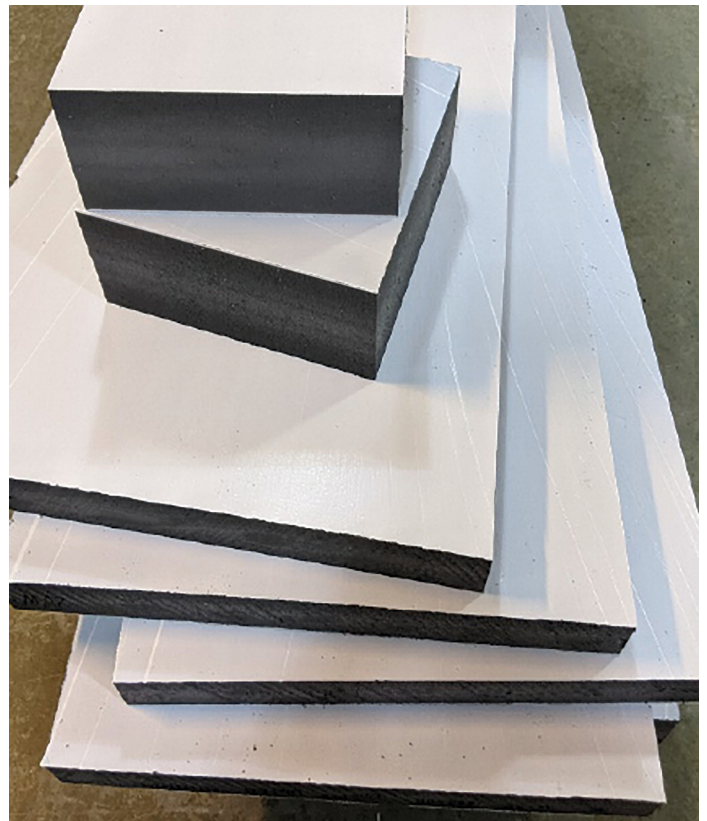

Sustainable Solutions

Styrofoam™ Brand Plazamate™ XR Foam Insulation uses BluEdge™ technology. It is free of hydrochlorofluorocarbons (HCFC) and volatile organic components (VOC), carries zero ozone depletion potential, is compliant with HFC regulations, and is reusable in many applications.

Styrofoam™ Brand XPS Insulation is made of extruded polystyrene (XPS) and can be recycled at facilities that recycle XPS materials. Please check recycling facilities in your area to ensure they can recycle XPS Insulation.

* R means resistance to heat flow. The higher the R-value or RSI, the greater the insulating power.

PROPERTIES

DuPont™ Styrofoam™ Brand Plazamate™ XR Foam Insulation products exhibit the typical physical properties indicated in Table 1 when tested as represented. Review all instructions and (Material) Safety Data Sheet ((M)SDS) before use. Please contact DuPont at joseph.w.rofrano@DuPont.com when additional guidance is required for writing specifications that include this product.

TABLE 1: U.S. Physical Properties of Styrofoam™ Brand Plazamate™ XR Foam Insulation

Property and Test Method	Value
Complies with ASTM C578 Type VII	
Thermal Resistance ⁽¹⁾ per inch, ASTM C518, ft ² ·h·°F/Btu, R-value, min.	
@ 75°F (24°C) mean temp.	6.7
@ 40°F (4°C) mean temp.	7.4
@ 25°F (-4°C) mean temp.	7.7
Maximum Use Temperature, °F	165
Compressive Strength ⁽²⁾ , ASTM D1621, psi, min.	60.0
Water Absorption, ASTM C272, % by volume, max.	0.01
Water Vapor Permeance ⁽³⁾ , ASTM E96, perm, max.	0.2
Coefficient of Linear Thermal Expansion, ASTM D696, in/in·°F	3.5x10 ⁻⁵
Flexural Strength, ASTM C203, psi, min.	75.0
Dimensional Stability, ASTM D2126, % linear change, max.	0.9
Surface Burning Characteristics, ASTM E84 Flame Spread ⁽⁴⁾ 20, Smoke Developed 50 ⁽⁴⁾	

⁽¹⁾ Values are consistent with the criteria of ASTM C578. R means resistance to heat flow. The higher the R-value, the greater the insulating power.

⁽²⁾ Vertical compressive strength is measured at 10 percent deformation or at yield, whichever occurs first. Since Styrofoam™ Brand Extruded Polystyrene Foam Insulation is a visco-elastic material, adequate design safety factors should be used to prevent long-term creep and fatigue deformation. For static loads, 3:1 is suggested. For dynamic loads, 5:1 is suggested.


⁽³⁾ Based on 1" thickness.

⁽⁴⁾ These numerical flame spread and smoke developed ratings are not intended to reflect hazards presented by this or any other material under actual fire conditions.

Standard Sizes

Nominal Board Thickness	R-value	Board Size (ft)	Edge Treatments
2.25	15	4x8	Square Edge ⁽¹⁾
3.0	20	4x8	Square Edge ⁽¹⁾

⁽¹⁾ Effective surface area of 4x8 square edge boards are 16 ft² and 32 ft², respectively

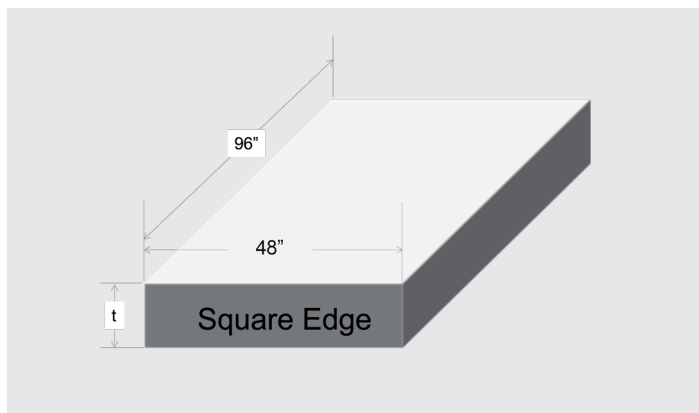

TESTING

Applicable Standards

Styrofoam™ Brand Plazamate™ XR meets ASTM C578-19, Type VII – Standard Specification for Rigid Cellular Polystyrene Thermal Insulation. Applicable standards include:

C518 – Standard Test Method for Steady - State Thermal Transmission Properties by Means of the Heat Flow Meter Apparatus

D1621 – Standard Test Method for Compressive Properties of Rigid Cellular Plastics

C272 – Standard Test Method for Water Absorption of Core Materials for Structural Sandwich Constructions

E96 – Standard Test Methods for Water Vapor Transmission of Materials

E84 – Standard Test Method for Surface Burning Characteristics of Building Materials

D696 – Standard Test Method for Linear Thermal Expansion of Plastics Between -30°C and 30°C With a Vitreous Silica Dilatometer

C203 – Standard Test Methods for Breaking Load and Flexural Properties of Block-Type Thermal Insulation

D2126 – Standard Test Method for Response of Rigid Cellular Plastics to Thermal and Humid Aging

Notice

Styrofoam™ Brand Plazamate™ XR Extruded Polystyrene (XPS) Foam Insulation complies with the following codes: Underwriters Laboratories, Inc. (UL) Classified

Warranty

In the United States, a 50-year thermal limited warranty is available on Styrofoam™ products 1.5 inches and greater. For thickness less than 1.5 inches, other warranties may apply. Visit building.dupont.com/warranties or contact your DuPont representative for details.

Applicable Standards

WARNING: For Professional Use Only – Read and follow the entire Handling section and the Safety Data Sheets (SDSs, formerly MSDSs or Material Safety Data Sheets) carefully before use. The information below is designed to protect the user and allow for safe use and handling of Styrofoam™ Brand products. Follow all applicable federal, state, local and employer regulations.

Precautionary Statements

Styrofoam™ Brand Plazamate™ XR Insulation is combustible; protect from high heat sources.

A protective barrier or thermal barrier may be required as specified in the appropriate building code. For more information, consult MSDS, call DuPont at 1-833-338-7668 or contact your local building inspector.

Because of the critical technical design aspects of many of its applications, DuPont recommends that qualified designers or consultants design the system. Contact a local DuPont representative for more specific instruction.

Shelf Life and Storage

When stored outdoors, keep insulation boards in original packaging and weighted down to prevent boards from being blown around by the wind.

Disposal

Dispose of any residual Styrofoam™ Brand product, in accordance with applicable federal, state, and local government regulations.

Styrofoam™ Brand XPS Insulation is made of extruded polystyrene (XPS) and can be recycled at facilities that recycle XPS materials. Please check recycling facilities in your area to ensure they can recycle XPS Insulation.



**For more information
please contact Joe Rofrano
at joseph.w.rofrano@dupont.com**

NOTICE: No freedom from any patent owned by DuPont or others is to be inferred. Because use conditions and applicable laws may differ from one location to another and may change with time, Customer is responsible for determining whether products and the information in this document are appropriate for Customer's use and for ensuring that Customer's workplace and disposal practices are in compliance with applicable laws and other government enactments. The product shown in this literature may not be available for sale and/or available in all geographies where DuPont is represented. The claims made may not have been approved for use in all countries or regions. DuPont assumes no obligation or liability for the information in this document. References to "DuPont" or the "Company" mean the DuPont legal entity selling the products to Customer unless otherwise expressly noted. NO EXPRESS WARRANTIES ARE GIVEN EXCEPT FOR ANY APPLICABLE WRITTEN WARRANTIES SPECIFICALLY PROVIDED BY DUPONT. ALL IMPLIED WARRANTIES INCLUDING THOSE OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE EXPRESSLY EXCLUDED. The buyer assumes all risks as to the use of the material. Failure to strictly adhere to any recommended procedures shall release DuPont Specialty Products USA, LLC or its affiliates, of all liability with respect to the materials or the use thereof. The information herein is not intended for use by non-professional designers, applicators or other persons who do not purchase or utilize this product in the normal course of their business.

DuPont™, the DuPont Oval Logo, and all trademarks and service marks denoted with ™, SM or ® are owned by affiliates of DuPont de Nemours, Inc. unless otherwise noted. © 2023 DuPont. All rights reserved.

43-D101245-enUS-1023 CDP