



Updated OSHA Standards for Crystalline Silica Dust

Technical Bulletin

What is crystalline silica?

Crystalline silica is a basic ingredient of the Earth's crust, found in many naturally occurring and manmade materials, including rock, soil, sand, concrete and brick. Quartz is the most common form of crystalline silica. Cristobalite and tridymite are a few others.

What are the risks?

When workers crush, cut, chip, drill or grind objects containing crystalline silica, the mineral may be broken down into small particles and breathed in. Crystalline silica exposure is associated with foundry work, sandblasting, hydraulic fracturing and many other jobs. The Occupational Safety and Health Administration (OSHA) estimates that 2.3 million workers are exposed to silica in the United States¹.

Crystalline silica has been recognized as a serious health hazard to industrial workers for decades. Workers who are exposed to crystalline silica are at increased risk of developing serious health problems, including silicosis—an incurable lung illness—as well as lung cancer, chronic obstructive pulmonary disease (COPD) and other respiratory diseases—even kidney disease.

What are the standards?

OSHA established exposure limits for crystalline silica more than 40 years ago, but more recent scientific data suggest that those limits were insufficient to protect workers.

In June 2016, two new OSHA standards for crystalline silica came into effect: one for maritime and general industry, and the other for the construction industry. The new standards establish a permissible

exposure limit of 50 micrograms of respirable crystalline silica per cubic meter of air ($50 \mu\text{g}/\text{m}^3$) as an eight-hour time-weighted average in all industries covered by the rule.

The 2016 standards include additional provisions to help protect employees, including requirements for exposure assessment, exposure control methods, respiratory protection, medical surveillance, hazard communication and recordkeeping.

While respiratory protection is the only personal protective equipment (PPE) prescribed by the new standards, other forms of PPE, including protective clothing, are critical to maximizing worker protection.

Preventing the spread of crystalline silica

In addition to on-the-job exposure, workers can unknowingly carry crystalline silica home on their clothes, shoes, skin, tools and vehicle interiors. Other people, especially family members, can be exposed to silica that has become embedded in auto upholstery, home furniture, and clothing via shared laundry loads. Similarly, crystalline silica can be circulated through household air and transmitted through person-to-person contact.

OSHA has standards aimed at preventing the incidence of these so-called “take-home toxin” events and can impose stiff fines on employers who don't follow them. The new crystalline silica standards include requirements for establishing regulated/restricted areas, engineering controls, work practices and housekeeping to contain and control crystalline silica exposure.


What protective apparel is available?

Employers can help prevent the spread of crystalline silica by choosing effective protective garments for workers and requiring them to don and doff apparel on site. Employers in many industries trust protective garments made with Tyvek®, which are:

- Soft
- Lightweight
- Durable
- Low linting
- Chemically and biologically inert

With Tyvek®, protection is built into the fabric itself. The barrier extends throughout the garment and helps provide excellent protection against particles in the 1-2 µm range. (Spunbonded polypropylene fabric, by contrast, has an open structure and offers a poor barrier against particles in the 1-2 µm range.)

Tyvek® apparel features a comfort-fit design that improves worker mobility and makes garments easier to put on and take off. Available garments include coveralls with and without respirator-fit hoods, lab coats, jackets, as well as a variety of accessories including hoods, sleeves and slip-resistant shoe covers.

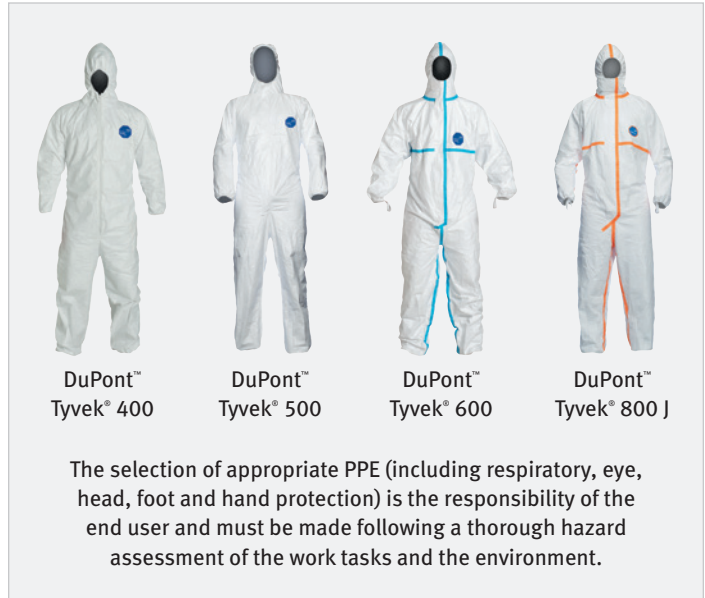

References:

¹OSHA Fact Sheet, *Workers' Exposure to Respirable Crystalline Silica: Final Rule Overview*, 2016

This information is based upon technical data that DuPont believes to be reliable. It is subject to revision as additional knowledge and experience are gained. DuPont makes no guarantee of results and assumes no obligations or liability in connection with this information. It is the user's responsibility to determine the level of toxicity and the proper personal protective equipment needed. The information set forth herein reflects laboratory performance of fabrics, not complete garments, under controlled conditions. It is intended for information use by persons having technical skill for evaluation under their specific end-use conditions, at their own discretion and risk.

Anyone intending to use this information should first verify that the garment selected is suitable for the intended use. In many cases, seams and closures have shorter breakthrough times and higher permeation rates than the fabric. If fabric becomes torn, abraded or punctured, end user should discontinue use of garment to avoid compromising the barrier protection. SINCE CONDITIONS OF USE ARE OUTSIDE OUR CONTROL, WE MAKE NO WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING WITHOUT LIMITATION, NO WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR USE AND ASSUME NO LIABILITY IN CONNECTION WITH ANY USE OF THIS INFORMATION. This information is not intended as a license to operate under or a recommendation to infringe any patent, trademark or technical information of DuPont or others covering any material or its use.



DuPont™ SafeSPEC™

SafeSPEC.DuPont.com

**DuPont Personal Protection
Customer Service:
United States 1-800-931-3456
Canada 1-800-541-2202**

PersonalProtection.DuPont.com