




Pouch Seal Strength Comparison for Uncoated 1073B — ASTM F88



Tyvek® 1073B - Control

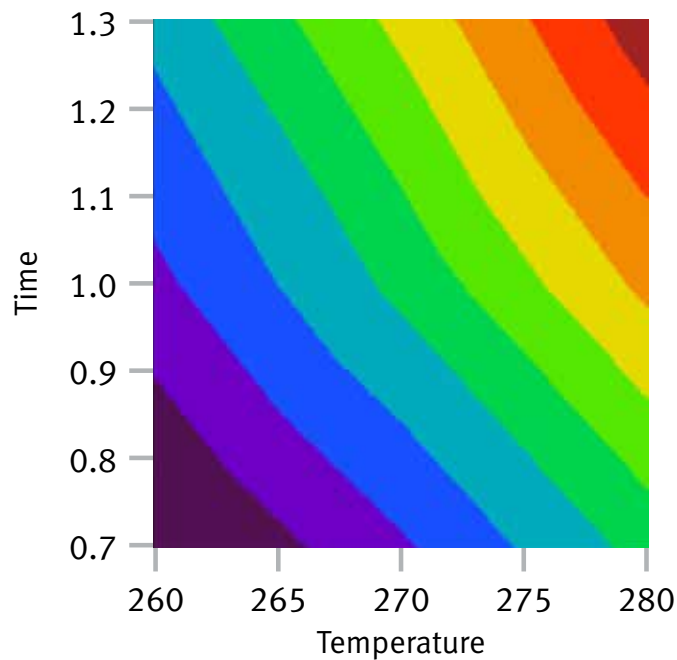

Sample A

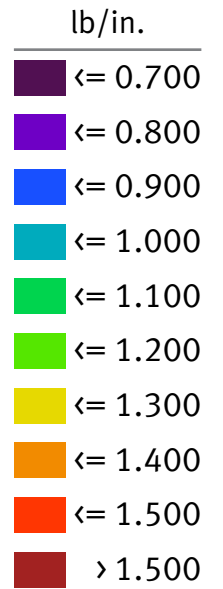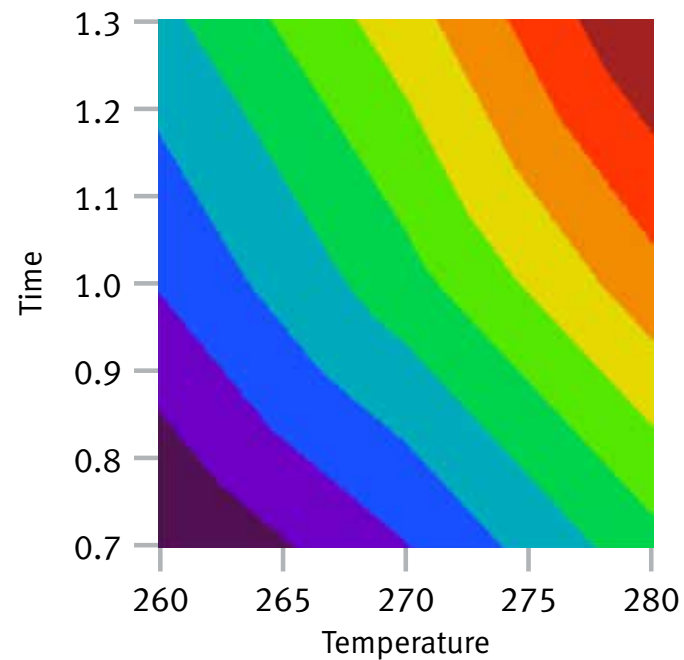


Film was 100-gauge bi-axial nylon with HDPE.
Tested per ASTM F88. Free tail (i.e., unsupported)
N>500 data point averages


FFS Blister Pack Seal Strength Comparison for Uncoated 1059B — ASTM F88



Tyvek® 1059B - Control

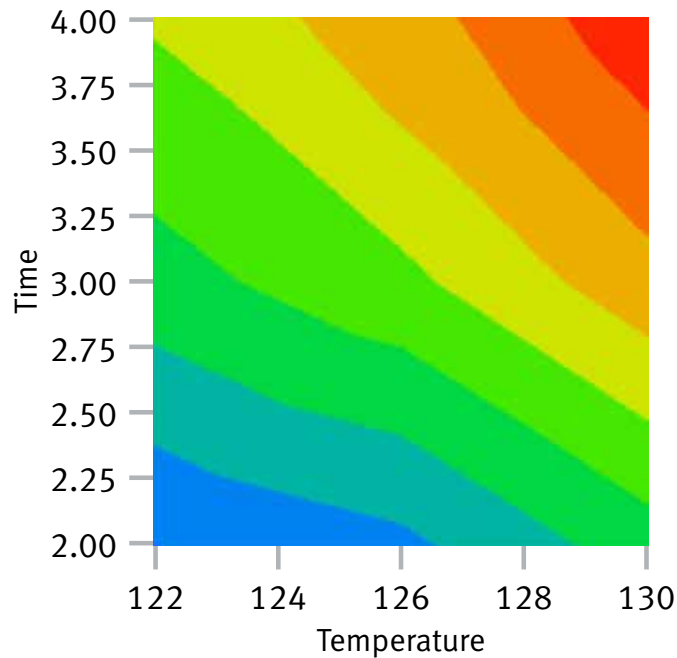

Sample A

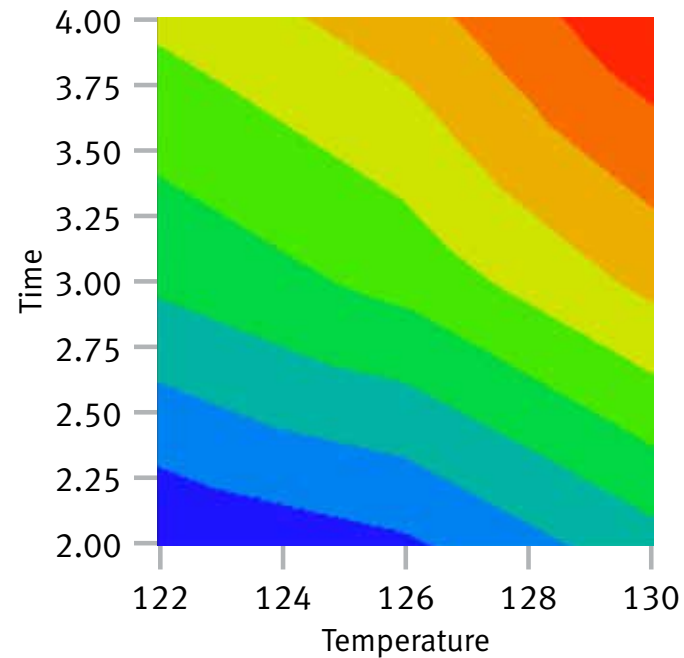

Film was 100-gauge multi-layer nylon with peelable sealant.
Tested per ASTM F88. Free tail (i.e., unsupported)
N>500 data point averages