

# DuPont™ Delrin® SC698 Acetal Resin for Healthcare Devices

Delivering Low Friction for Smooth, Precise Actuation and Injection Performance


DuPont Delrin® SC698 acetal resin, incorporates a lubricity additive and features the lowest coefficient of friction (COF) in the company's expanded portfolio. Low COF—when moving against itself and other materials—helps Delrin® SC698 resin provide smooth, easy actuation for drug delivery devices like inhalers, injectors and pumps. Patients can benefit from reduced effort, increased comfort, dosing accuracy, and consistent operation. Designers and manufacturers can depend on Delrin® SC698 for a smooth surface and good colorability.

Delrin® SC698 resin can also help to improve precise positioning of wearable patches and minimize discomfort when inserting pump connectors by enabling the use of smaller springs.

This highly crystalline homopolymer's strength, stiffness and fatigue resistance, combined with its ultra-low COF, deliver excellent wear properties over time and repeated use. Its high impact resistance helps protect against damage from drops.

For device OEMs, the strength, rigidity and dimensional stability of Delrin® SC698 resin can allow the manufacturing of thin-wall, complex and miniaturized designs without sacrificing performance.

## Processability – Surface aspect

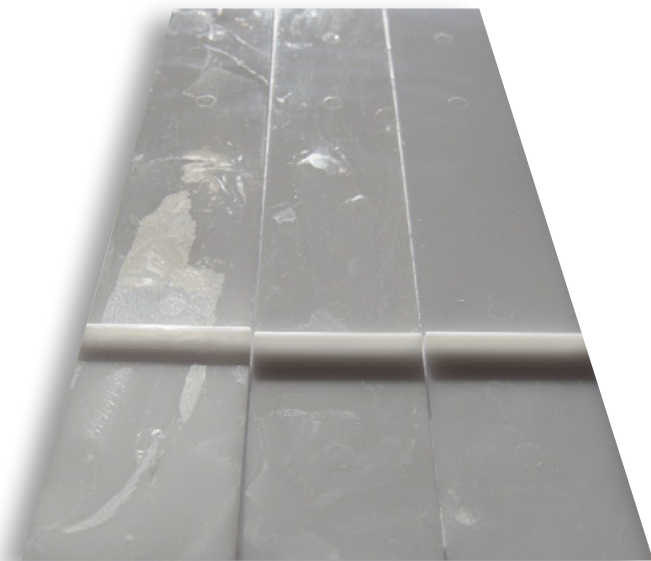


© DuPont

Low friction  
POM copolymer

Delrin® SC699

Delrin® SC698

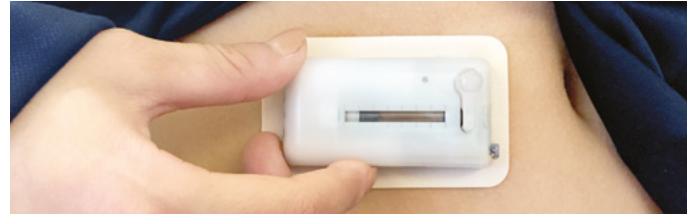

*Pictured: insulin pumpable patch device with moving internal components*

© DuPont

The medical device industry continues to innovate with wearables devices that are making home-care and self-administration more convenient for patients. The unique characteristics of DuPont's Delrin® (lubricity, toughness, stability) play a key role in the success of moving internal components for these devices.

## What is SC?

The SC designation in Delrin® SC698 stands for special control. DuPont SC resin grades experience a high amount of testing, and offer a great degree of manufacturing control and broad regulatory compliance.

- Manufactured according to Good Manufacturing Practice (GMP)
- Acquired food contact statements
- Testing against selected parts USP Class VI
- Testing against relevant parts ISO 10993
- Sterilization data
- Global availability

## Features



- Ultra-low coefficient of friction
- High tensile strength and stiffness
- Excellent creep resistance and dimensional stability
- High fatigue resistance and impact toughness
- Good colorability
- Attractive surface finish compared to other friction-modified grades
- Sterilizable\*

\*Not suitable for gamma irradiation and E-beam technology

## Benefits

- Smooth, precise actuation of high-load devices for easier patient operation
- Excellent wear/friction performance and durability
- Attractive aesthetics that appeal to patients and encourage use
- Expanded freedom to design thin-wall and complex parts
- System cost reduction through high-volume injection molding
- Avoids need for external lubrication of components

## Comparison of Delrin® SC698 with low friction POM copolymer

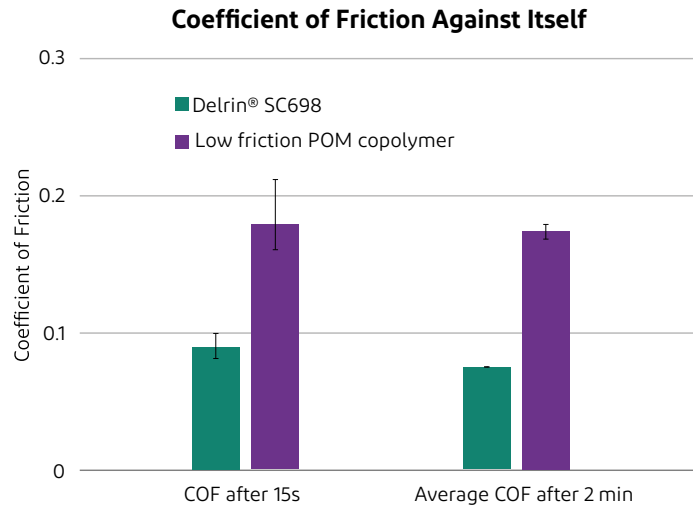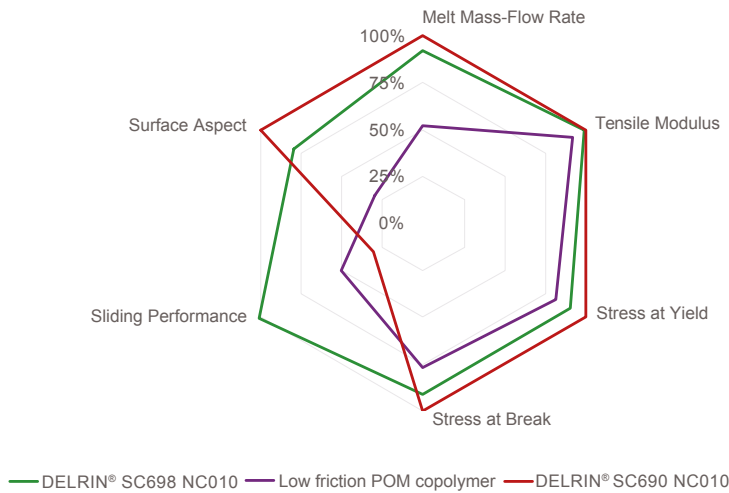

### Target Applications

- Drug delivery devices
- Patch/connector inserters
- Gear systems
- Wearables

### Target Customers

- Medical device OEMs
- Device designers
- Injection molders
- Pharmaceutical OEMs

## DELRIN® SC698 NC010 (preliminary)

Acetal Resin

Mold shrinkage, normal: 1.8% ISO 294-4, 2577

### Mechanical properties

Tensile Modulus	3100 MPa	ISO 527-1/-2
Yield stress	65 MPa	ISO 527-1/-2
Yield strain	11 %	ISO 527-1/-2
Nominal strain at break	14 %	ISO 527-1/-2
Charpy impact strength, 23°C	90 kJ/m <sup>2</sup>	ISO 179/1eU
Charpy impact strength, -30°C	85 kJ/m <sup>2</sup>	ISO 179/1eU
Charpy notched impact strength, 23°C	4 kJ/m <sup>2</sup>	ISO 179/1eA
Charpy notched impact strength, -30°C	4 kJ/m <sup>2</sup>	ISO 179/1eA
Poisson's ratio	0.37 -	

### Thermal properties

Melting temperature, 10°C/min	178 °C	ISO 11357-1/-3
Thermal conductivity of melt	0.22 W/(m K)	
Spec. heat capacity of melt	3020 J/(kg K)	

#### NO WARRANTY - PLEASE READ CAREFULLY

##### About DuPont

DuPont (NYSE: DD) is a global innovation leader with technology-based materials, ingredients and solutions that help transform industries and everyday life. Our employees apply diverse science and expertise to help customers advance their best ideas and deliver essential innovations in key markets including electronics, transportation, building and construction, health and wellness, food and worker safety. More information can be found at [www.dupont.com](http://www.dupont.com).

© 2019 DuPont de Nemours, Inc. All rights reserved. DuPont™, the DuPont Oval Logo, and all products, unless otherwise noted, denoted with ™, SM or ® are trademarks, service marks or registered trademarks of affiliates of DuPont de Nemours, Inc.

The information set forth herein is furnished free of charge and is based on technical data that DuPont believes to be reliable and falls within the normal range of properties. It is intended for use by persons having technical skill, at their own discretion and risk. This data should not be used to establish specification limits nor used alone as the basis of design. Handling precaution information is given with the understanding that those using it will satisfy themselves that their particular conditions of use present no health or safety hazards. Since conditions of product use and disposal are outside our control, we make no warranties, express or implied, and assume no liability in connection with any use of this information. As with any product, evaluation under end use conditions prior to specification is essential. Nothing herein is to be taken as a license to operate or a recommendation to infringe on patents.

001-20270-PBU1119



[www.dupont.com](http://www.dupont.com)