

# BETAMATE™ Structural Bonding Adhesives


BETAMATE™ one- and twocomponent epoxy structural adhesives provide highperformance bonding to steel, aluminum and other materials to enhance stiffness, NVH, crash and durability performance.

They replace welds and mechanical fasteners to help improve durability while reducing weight and manufacturing cost. They are ideal for use in closures (doors, hoods, trunks and liftgates) as well as body structure and chassis (underbody, pillars and roof) applications.

## Solution

Dupont structural adhesives:

- Increase car body stiffness for improved handling and acoustic performance
- Decrease cost by reducing spotwelds, downgauging steel and enabling use of mild-steel in place of high-strength steel
- Reduce vehicle weight, thereby reducing CO<sub>2</sub> emissions
- Streamline assembly processes by overcoming weld point access issues

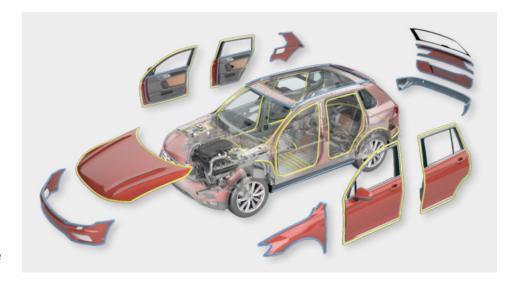

- Feature a modulus above 1,000 MPa, a glass transition temperature above 80 °C (176 °F) and an impact resistance f(t) from -40 °C to 80 °C (-40 °F to 176 °F)
- · Adhere to oily substrates
- · Are wash-off resistant
- Contribute to lightweight design flexibility and overall vehicle safety
- Join dissimilar and hard-to-weld substrates, including advanced highstrength steel, aluminum, magnesium and composites
- Improve chassis and body durability by reducing fatigue and failure commonly found around spot welds and fasteners
- Seal against environmental conditions that cause corrosion
- Can help lower cost by reducing welds and gauge, without losing mechanical properties

# **Applications**

To meet changing trends in vehicle design and contribute to lighter vehicles, BETAMATE™ structural adhesives can be used on the following, in addition to steel and high-strength steel (HSS):

- · Full aluminum vehicle bodies
- Aluminum closures
- · Cast aluminum to profile bonding
- Composite body-in-white parts integration
- Magnesium suspension struts
- Aluminum chassis/powertrain components
- Aluminum or composite roof bonding
- · Bonded seat structures

### Application and Bonding

One- and two-part BETAMATE™ structural adhesives are designed to meet stringent OEM requirements. They provide excellent bonding and adhesion to a wide variety of materials, including:

- · Coated or uncoated steel
- · Pretreated aluminum
- · Pretreated magnesium

Typically when using thermal-cured, one-component adhesives, no treatment is required for most metals if the surface is well-defined and oil quantity does not exceed four grams per square meter. We recommend wiping off excess oil when using a two-component system with no heat treatment. DuPont offers technical support to assist with specific applications.


For composite materials, plastics and hybrid system bonding, or any other assembly where a thin bond line is not possible, DuPont also offers an extensive portfolio of elastic and composite bonding systems with higher elasticity.

#### Supporting Your Project from Concept to Launch

DuPont is a leading supplier of materials, technology and support for automotive adhesive applications. We offer you a globally consistent, reliable and secure material supply, with significant cost efficiencies. We have engineering expertise to facilitate the design with – and use of – structural adhesives. And on the front end, we offer a complete range of materials for the transportation industry, including leading adhesives, glass bonding systems, polyurethanes, sealants, films, fluids, structural enhancement and acoustical management solutions.



BETAMATE™ structural adhesives can be applied robotically in bead, swirl or jet spray using standard industrial equipment. The adhesives also can be applied manually from dispensing systems or cartridges.



Fracture-toughened BETAMATE™ adhesives perform better than standard grades with improved stability to progressive crush and load-carrying capability.

#### About DuPont Transportation & Industrial

DuPont Transportation & Industrial (T&I) delivers a broad range of technology-based products and solutions to the transportation, electronics, healthcare, industrial and consumer markets. T&I partners with customers to drive innovation by utilizing its expertise and knowledge in polymer and materials science. T&I works with customers throughout the value chain to enable material systems solutions for demanding applications and environments. For additional information about DuPont Transportation & Industrial, visit dupont.com.

dupont.com



DuPont $^{\text{M}}$ , the DuPont Oval Logo, and all trademarks and service marks denoted with  $^{\text{M}}$ ,  $^{\text{SM}}$  or  $^{\text{O}}$  are owned by affiliates of DuPont de Nemours, Inc. unless otherwise noted.  $^{\text{O}}$  2019 DuPont.

The information set forth herein is furnished free of charge and is based on technical data that DuPont believes to be reliable and falls within the normal range of properties. It is intended for use by persons having technical skill, at their own discretion and risk. This data should not be used to establish specification limits nor used alone as the basis of design. Handling precaution information is given with the understanding that those using it will satisfy themselves that their particular conditions of use present no health or safety hazards. Since conditions of product use and disposal are outside our control, we make no warranties, express or implied, and assume no liability in connection with any use of this information. As with any product, evaluation under end-use conditions prior to specification is essential. Nothing herein is to be taken as a license to operate or a recommendation to infringe on patents.