DuPont™ Vespel® CR-6100 Pump Wear Components

APPLICATION SUMMARY

Product Description

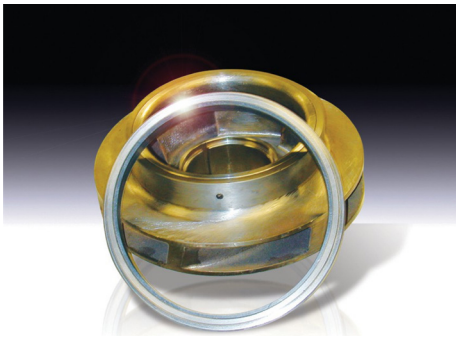

Vespel® CR-6100 wear components are based on an advanced composite material consisting of a high performance Teflon® PFA fluorocarbon resin and oriented carbon fibers (PFA/CF Reinforced Composite, 20 wt% random x-y oriented carbon-fiber).

The patented manufacturing process creates parts which exhibit:

- Excellent dimensional stability
- Proven run-dry performance
- High temperature serviceability (up to 500°F [260°C])
- Broad chemical compatibility
- Machining ease and assembly installation

Vespel® CR-6100 wear components have been successfully used in thousands of centrifugal pumps in major refineries, chemical plants, power plants, pipeline terminals, and municipal water utilities.

Why Use Vespel® CR-6100?

Pump performance and reliability are significantly improved.

- Because Vespel® CR-6100 is non-metallic, has a low coefficient of friction, and excellent dimensional stability, it can withstand short-duration off-design conditions such as start-up, slow-rolling, low-flow, cavitation, or run-dry situations. The pump remains available for service, resulting in potentially lower repair costs.
- With these characteristics, clearance at wear components can be reduced. This results in efficiency gains which lead to significant operating cost reductions, particularly when applied to populations of pumps.
- Improved reliability: Pumps with reduced clearance also exhibit lower vibration levels and reduced cavitation. Seals and bearings last longer, and MTBR increases.

Example: One customer installed Vespel® CR-6100 wear rings, throat bushings, and pressure reducing bushings in two multistage gasoline shipping pumps. This conversion resulted in a 7% effi ciency gain and a 90% reduction of overall vibration levels. The pumps have been in service over four years without failure, where the previous MTBR was 12 months.

Vespel® CR-6100 offers improved performance vs. other wear ring materials.

- Vespel® CR-6100 is based on a fluoropolymer, which gives it broad chemical resistance and a low coefficient of friction. These characteristics coupled with its high temperature resistance and low thermal growth make Vespel® CR-6100 a suitable candidate for a wide range of applications.
- The durability of Vespel® CR-6100 aids installation and machining, and stays tough during operation.

Where to Use Vespel® CR-6100

DuPont™ Vespel® CR-6100 is used for I.D.-mounted (in compression) wear components in nearly all centrifugal pump types in non-abrasive process services up to 500°F (260°C).

Pump Services

Vespel® CR-6100 has been used in thousands of pumps in a broad range of hydrocarbon, chemical and water services. Some applications include:

- Boiler feed
- Condensate
- Propane
- Butane
- Ethylene
- LPG
- Diesel
- Gas oil
- Sour water
- Naphtha
- Gasoline
- MEA
- DEA
- Sulfuric acid
- Ammonia
- Hydrofluoric acid
- Caustic
- Lube oil

Pump Components

- Wear rings
- Throat bushings
- Pressure-reduced bushings
- Line shaft bearings
- Inter-stage bearings

Pump Types

- Overhung horizontal
- Vertical
- Between bearings
- Multistage

Applications are not limited to those listed.

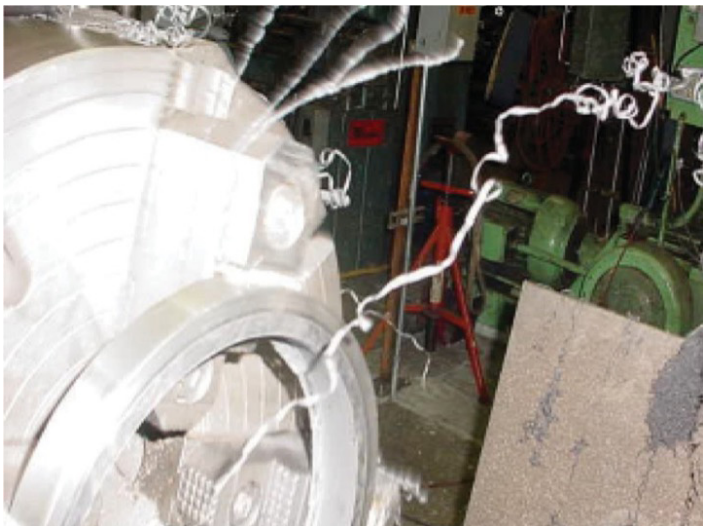

Vespel® CR-6100 is fast and easy to machine.

Visit us at vespel.com

The information set forth herein is furnished free of charge, is based on technical data that DuPont believes to be reliable and represents typical values that fall within the normal range of properties. This information relates only to the specific material designated and may not be valid for such material used in combination with other materials or in other processes. It is intended for use by persons having technical skill, at their own discretion and risk and it is not intended as a substitute for any testing you may conduct to determine for yourself the suitability of our products and information for your particular purpose. This information should not be used to establish specification limits nor used alone as the basis of design. Handling precaution information is given with the understanding that those using it will satisfy themselves that their conditions of use present no health or safety hazards and comply with applicable law. Since conditions of product use and disposal are outside our control, DUPONT DE NEMOURS, INC. AND ITS AFFILIATES MAKE NO WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE AND ASSUMES NO LIABILITY IN CONNECTION WITH ANY USE OF THIS PRODUCT AND INFORMATION. As with any product, evaluation under end use with applicable law. conditions prior to specification is essential. Nothing herein is to be taken as a license to operate or a recommendation to infringe on patents.

CAUTION: Do not use DuPont materials in medical applications involving implantation in the human body or contact with internal body fluids or tissues unless the material has been provided from DuPont under a written contract that is consistent with the DuPont policy regarding medical applications and expressly acknowledges the contemplated use. For further information, please contact your DuPont representative. DuPont's sole warranty is that our products will meet our standard sales specifications in effect at the time of shipment. Your exclusive remedy for breach of such warranty is limited to refund of purchase price or replacement of any product shown to be other than as warranted. TO THE FULLEST EXTENT PERMITTED BY APPLICABLE LAW, DUPONT DE NEMOURS, INC. AND ITS AFFILIATES SPECIFICALLY DISCLAIMS ANY OTHER EXPRESS OR IMPLIED WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE, MERCHANT-ABILITY, OR NON INFRINGEMENT. DUPONT DE NEMOURS, INC. AND ITS AFFILIATES DISCLAIMS LIABILITY FOR ANY SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES.

DuPont™, the DuPont Oval Logo, and all trademarks and service marks denoted with ™, ℠ or ® are owned by affiliates of DuPont de Nemours, Inc. unless otherwise noted.
© 2026 DuPont. All rights reserved.

Reference No. A20 VPE-A40150-00-B0526 0507 CDP

DUPONT™

dupont.com