




## Water Treatment in Industrial and Power Markets

# AMBERLITE™ Ion Exchange Resins for Layered Bed Systems

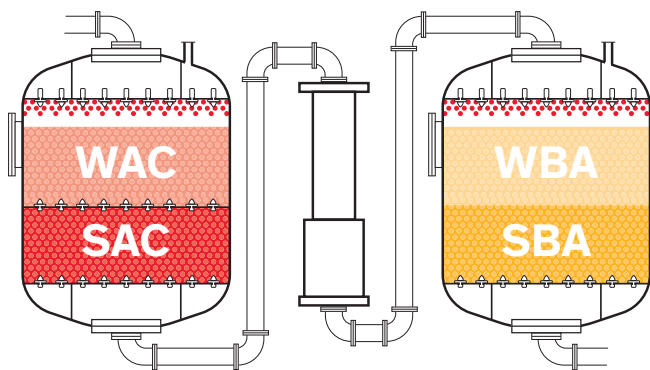

### Key benefits of a layered resin bed include:

- Significant capital cost and footprint savings compared to using the weak and strong resins in two separate vessels.
- Higher throughput capacity versus a single bed strong base anion (SBA)/ strong acid cation (SAC) because the weak base anion (WBA) / weak acid cation (WAC) has a higher capacity and better regeneration efficiency than the SBA/SAC
- Efficient use of the same chemicals to regenerate both the SBA /SAC then the WBA/WAC
- Lower operating costs compared to a single SBA/SAC bed
- WBA resins remove organic matter more efficiently, protecting the SBA and maintaining system performance

Overall efficiency and throughput of a demineralization system can be improved by utilizing weak resins in combination with strong resins. Using weak and strong resins in a layered bed configuration in a single vessel provides significant capital cost and footprint savings compared to using the resins in two separate vessels.

Selecting the right ion exchange resin for layered beds is crucial as the design configuration is made possible by the density and particle size differences between the weak and strong resins used. Upon exhaustion, the backwashing operation separates the resin layers that may have become partially mixed during service. In order for the full advantages of a layered bed to be realized, good resin separation is important.

Recommended AMBERLITE™ Ion Exchange Resin Pairs for Layered Beds	AMBERLITE™ HPR1300 H	AMBERLITE™ HPR1300 Na	AMBERLITE™ HPR2800 H	AMBERLITE™ HPR4200 Cl	AMBERLITE™ HPR4200 OH	AMBERLITE™ HPR4580 Cl
AMBERLITE™ HPR8300 H	P	A	P			
AMBERLITE™ HPR9600				P	P	P
AMBERLITE™ HPR9500				P	P	P

P = Preferred      A = Acceptable

Use of inert may be required depending on system design.

---

**Water Solutions**

7600 Metro Blvd.  
Edina, MN 55439

**For more information, contact our Customer****Information Group:**

North America	1-800-447-4369
Europe	+800-3-694-6397
China	+400-889-0789
Latin America	+55-11-5188-9555

**[dowwaterandprocess.com](http://dowwaterandprocess.com)**

---

NOTICE: No freedom from infringement of any patent owned by Dow or others is to be inferred. Because use conditions and applicable laws may differ from one location to another and may change with time, Customer is responsible for determining whether products and the information in this document are appropriate for Customer's use and for ensuring that Customer's workplace and disposal practices are in compliance with applicable laws and other government enactments. The product shown in this literature may not be available for sale and/or available in all geographies where Dow is represented. The claims made may not have been approved for use in all countries. Dow assumes no obligation or liability for the information in this document. References to "Dow" or the "Company" mean the Dow legal entity selling the products to Customer unless otherwise expressly noted. NO WARRANTIES ARE GIVEN; ALL IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE ARE EXPRESSLY EXCLUDED.