



Case Study

DOW FILMTEC™ membranes

FILMTEC™ elements in Minimal Liquid Discharge (MLD) system reduces 70-75% of water needing expensive Zero Liquid Discharge (ZLD) treatment for Flue Gas Desulfurization (FGD) Wastewater in HuaNeng ChangXing Power Plant

Site Information:

Location:

ChangXing, Zhejiang Province, China

Purpose:

FGD wastewater MLD/ZLD

Performance:

Successfully concentrate wastewater before forward osmosis and evaporator

In December 2014 the HuaNeng ChangXing Power Plant in ChangXing city, Zhejiang province in China started up. It has two 660 MW power generating units and since April 2015, practices zero liquid discharge treatment of its Flue Gas Desulfurization (FGD) wastewater (18 m³/h) and ion exchange regeneration wastewater (4 m³/h).

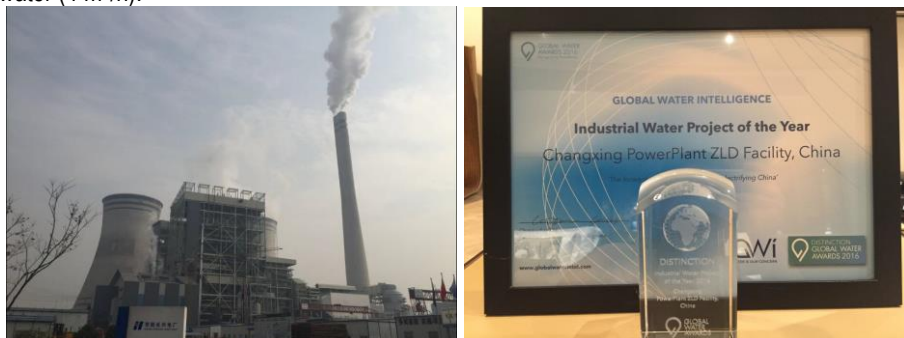


Figure 1. The view of HuaNeng ChangXing power plant and GWI award on this ZLD project (Photo courtesy of Beijing Wotear Water Technology Co. Ltd)

Process

The MLD/ZLD treatment process is shown in the Figure below. It includes lime/soda chemical softening to remove the majority of hardness, weak acid cation (WAC) ion exchange resin to remove the residual hardness, two passes reverse osmosis (RO) system to pre-concentrate the ion composition, forward osmosis (FO) to further concentrate the ion composition, and finally evaporation followed by crystallization to obtain the crystallized salt.

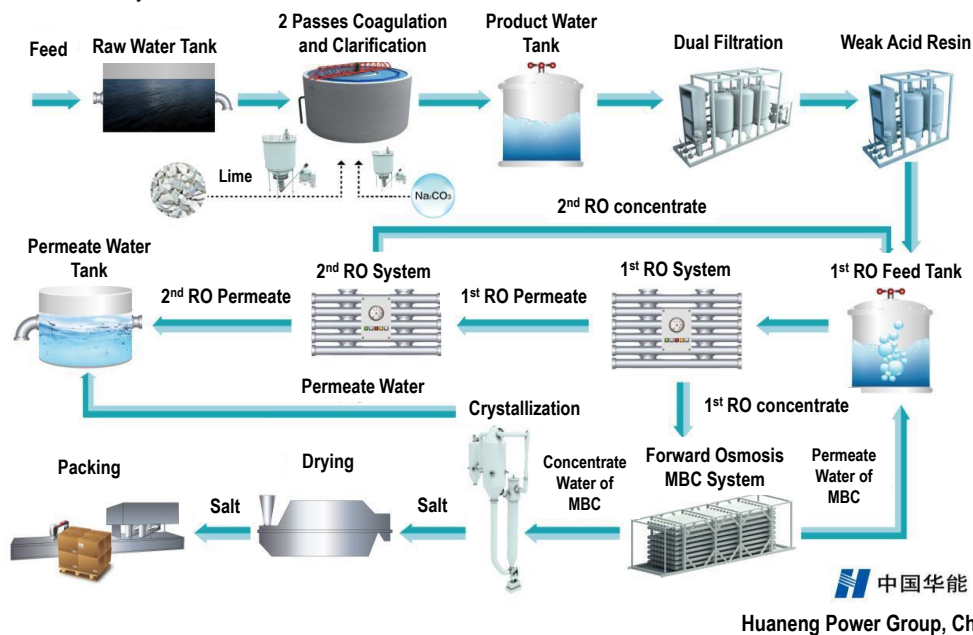


Figure 2. MLD/ZLD treatment process of HuaNeng ChangXing power plant (Photo courtesy of Beijing Wotear Water Technology Co. Ltd)



Case Study

Case Study

The RO system is designed with two passes. The first pass is a two stage system equipped with 70 pcs of DOW FILMTEC™ SW30HRLE-370/34i reverse osmosis elements. The recovery of the first pass is stably maintained at 70-75% recovery and achieves >60,000 mg/L TDS reject concentration levels (Figure 3). The two pass RO system provides a stable, high permeate quality of <50 mg/L TDS. This stable operation not only provides ~100,000 m³/yr of reliable high quality source of water for reuse but also provides a reliable low water volume for downstream concentration steps and helps to eliminate ~2,000 tons/yr of salt to be released to the local river.

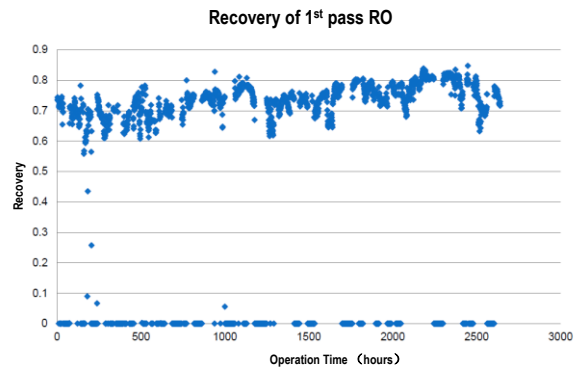


Figure 3. System recovery of the 1st pass RO (Photo courtesy of Beijing Woteer Water Technology Co. Ltd) (translate into English)

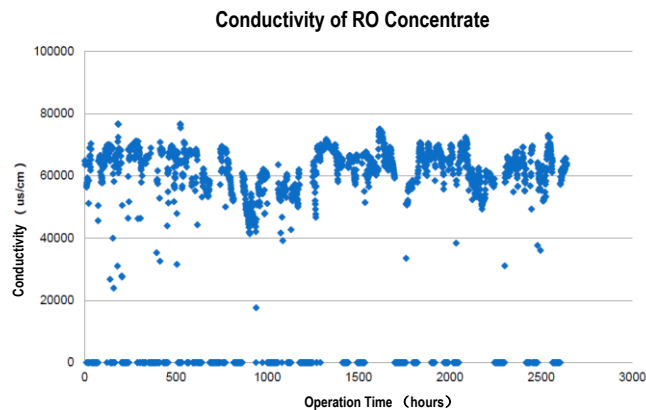


Figure 4. Concentrate conductivity of 1st pass RO (Photo courtesy of Beijing Woteer Water Technology Co. Ltd) (translate into English)

References

[1] Daxin Wang, Industrial application of forward osmosis in the high salinity wastewater ZLD. Tsingdao CDA conference, 2016.

DOW FILMTEC™

For more information about DOW™ resins, call the Dow Water & Process Solutions business:

North America: 1-800-447-4369
 Latin America: (+55) 11-5188-9222
 Europe: +800-3-694-6367
 Italy: +800-783-825
 South Africa: +0800 99 5078
 Pacific: +8007776 7776
 China: +400 889-0789
<http://www.dowwaterandprocess.com>

Notice: No freedom from infringement of any patent owned by Dow or others is to be inferred. Because use conditions and applicable laws may differ from one location to another and may change with time, Customer is responsible for determining whether products and the information in this document are appropriate for Customer's use and for ensuring that Customer's workplace and disposal practices are in compliance with applicable laws and other governmental enactments. The product shown in this literature may not be available for sale and/or available in all geographies where Dow is represented. The claims made may not have been approved for use in all countries. Dow assumes no obligation or liability for the information in this document. References to "Dow" or the "Company" mean the Dow legal entity selling the products to Customer unless otherwise expressly noted. NO WARRANTIES ARE GIVEN; ALL IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE ARE EXPRESSLY EXCLUDED.

