

# DuPont Water Solutions for Oil & Gas – **Unconventional**

Unconventional and sustainable production of hydrocarbons using DuPont's innovative water technologies



# Content

About DuPont Water Solutions.....3

The broadest Portfolio in the industry.....3

**Water Treatment for Unconventional Oil & Gas..... 3**

Shale Oil.....4

    Coal Seam Gas.....5

    The SAGD Process.....5

    The resources to run optimally.....6



# About DuPont Water Solutions

Companies, communities and homes around the world choose DuPont Water Solutions to help make water safer and more accessible. Industries and markets count on us to become more efficient. Our innovation and collaboration with the world's best water experts enables ecosystems of innovation to deploy vital technologies in new, market-shaping ways.

With a global network of accessible knowledge and a market-leading portfolio of purification and separation technologies, we help enable improved water productivity from which improved health, profitability, and new possibilities emerge. In a world of increasing water scarcity, we provide a proven path that balances resource productivity and responsibility.



Our products are based on decades of industry experience, and include ion exchange resins, reverse osmosis and nanofiltration technology, ultrafiltration modules, degasification modules and wastewater treatment products, with globally recognized brands like FilmTec™ Fortilife™, Memcor® and the DuPont™ Amber™ series to meet your water, wastewater and other separation needs.



We provide support to markets and industries across the globe, including residential, municipal, power generation, oil & gas, healthcare, commercial industries, chemical & petrochemical, food & beverage and microelectronics, to meet the needs of a wide range of applications. We also provide consultancy services for minimal liquid discharge (MLD) applications.



Unmatched in our global reach, industry experience and expertise, our focus and dedication places us in a unique position to help industries, organizations, and communities prosper. We offer the broadest portfolio in the water treatment technology industry and provide leading innovations.

## The broadest portfolio in the industry

Water is the largest by-product by volume in Oil & Gas production and requires treatment for use, reuse and discharge. To improve productivity, water with specific quality requirements is injected into the well for secondary and tertiary recovery. For discharge, the organic load (expressed as BOD, COD, TOC or oil & grease) is usually a limit for wastewater disposal permits.

From injection to produced water, we provide a complete set of treatment technologies to handle oil and gas production needs.

Like no other supplier, we can provide ultrafiltration (UF), reverse osmosis (RO) elements, sulfate-removal nanofiltration (NF) membranes, degassing membranes and wastewater solutions like membrane bioreactors (MBR), polymeric adsorbents and selective ion exchange (IX) resins. The use and details of these products are further described in this brochure, providing a sample of our expertise and growing portfolio of technologies that targets the unique needs of hydrocarbon exploration and production.

	MemPulse™ MBR	DuPont™ IntegraTec™ Ultrafiltration	FilmTec™ Reverse Osmosis Nanofiltration	DuPont™ Electrodeionization	
Wastewater					Ultrapure Water
	OxyMem™ MABR	DuPont™ B-Free™ Pretreatment	DesaliTec™ SOAR CCRO	Amber Series Ion Exchange Resins	

# Water Treatment for Unconventional Oil & Gas

**“Unconventional” oil and gas refers to extraction methods other than traditional vertical oil well pumping. The distinction arises from the accessibility of oil deposits and the unusual nature of their reservoirs. The unconventional oil extraction process requires the use of new, often complex, extraction methods. As this process becomes more popular, the exploration of these resources also raises environmental concerns such as groundwater contamination and overuse of scarce surface water.**

## Shale Oil

Shale oil is an unconventional oil that is extracted directly from shale rock formations by means of hydraulic fracturing. The hydraulic fracturing process can use more than 5 million gallons of water per well. A variety of organic and inorganic compounds are used in fracturing fluids to optimize formation fracture and proppant transportation. Consequently, it is of the utmost importance that the correct water quality is used during these operations to ensure unwanted salts and compounds do not interfere with the performance of the fracturing fluid.


Although the process of hydraulic fracturing requires large quantities of water, there is no reason for this water to be of pristine, drinking water quality. Water sources to support oil and gas production can come from a variety of sources, including recycled water produced along with oil and gas.

However, deep gas seams are often associated with hyper-saline, deep aquifers, which generate hyper-saline formation water. After the process of hydraulic fracturing is complete and the gas reservoirs are opened, the micro-fractures in shale rock pressurize and push a percentage of the hydraulic fracturing fluid back to the surface. This flowback water contains fracturing fluid, hydrocarbons, minerals and other substances that flowback from the deep sub-surface and must be contained in tanks for further treatment.

Fracturing operators face challenges when it comes to the recycling of flowback water. New advances in minimum liquid discharge (MLD) desalination processes treating hyper-saline shale oil wastewater can play a key role in the mitigation of public health and environmental impact and improve overall process sustainability.

MLD reclamation installations in shale oil applications may use a combination of:

- Polymeric adsorbents such as **DuPont™ AmberSorb™ L493** for the removal of oil and organics and BTEX (benzene, toluene, ethylbenzene, and xylene) recovery
- Weak acid cation (WAC) ion exchange (IX) resins such as **DuPont™ AmberLite™ IRC83 H** and **DuPont™ AmberLite™ HPR8300 H** for hardness removal
- Ultrafiltration for the treatment of particle removal.
- **FlimTec™ Fortilife™ XC-N** nanofiltration elements for produced water make-up
- Reverse osmosis elements for the treatment of high salinity streams. Various options are available to suit a wide array of needs: **FilmTec™ SW30XFR-400/34**, **FilmTec™ Fortilife™ XC70**, **FilmTec™ SW30XHR** or **DuPont™ XUS180808**.

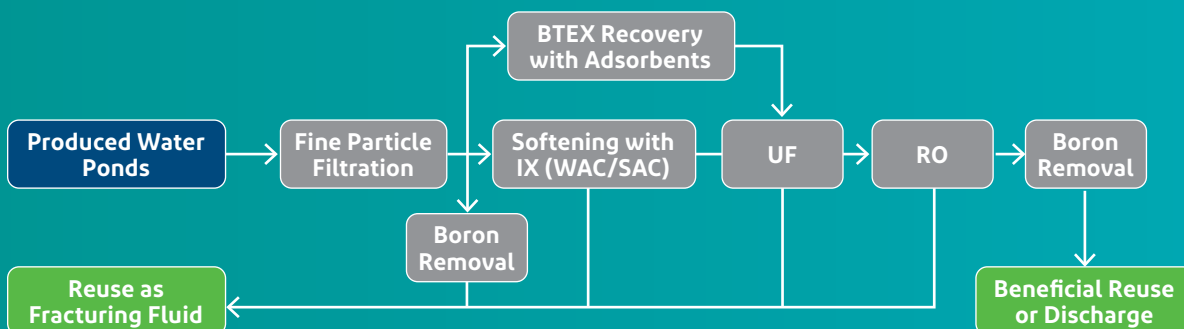


## Coal Seam Gas

Coal seam gas (CSG) is natural gas found in coal deposits and is classified as an unconventional gas resource which contains over 98% methane and a small amount of nitrogen and carbon dioxide. CSG is produced by extracting water from the formation, which reduces the pressure and releases the gas from the coal seam. The gas extraction process produces a significant amount of produced water.

This type of produced water has an extremely variable water quality, with typical total dissolved solids (TDS) levels between 1000 and 9000 parts-per-million (ppm). Most of the salinity is made up of sodium, chloride, bicarbonate, and carbonate ions. However, there are a multitude of other ions that may be present: cations – K, Ca, Mg, B, Sr & Ba – and anions – SiO<sub>2</sub> (dependent on pH), F & Br. Additionally, it may contain other harmful substances that may potentially negatively impact the environment (chemical additives, bitumen, etc.).

Many facilities opt for high-recovery solutions which allow for the beneficial reuse of treated wastewater. This typically includes an ultrafiltration (UF) pretreatment system, ion exchange (IX) resins for softening and reverse osmosis (RO) membranes for the removal of dissolved salts. Installations in CSG applications can use a combination of DuPont technologies such as:

- High recovery **IntegraTec™ P Series PVDF modules** including **XP 77** and **XP 77 IP**
- **DuPont™ AmberLite™ IRC83 H**, which is a stable IX product with extremely high capacity
- Low-pressure antifouling RO products including **FilmTec™ SW30XFR-400/34**, **FilmTec™ BW30XFRLE-400/34**, **FilmTec™ ECO PRO-400**, and the **FilmTec™ Fortilife™ series**
- **FilmTec™ XUS180808 Ultra High-Pressure RO Elements** for high-recovery and high-pressure systems

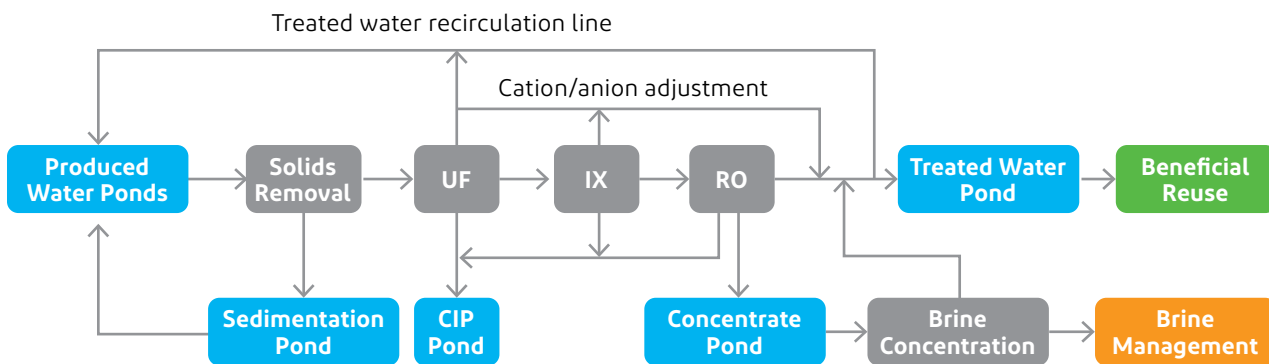

## The SAGD Process

Steam-Assisted Gravity Drainage (SAGD) is an enhanced oil recovery (EOR) technique for producing crude oil and bitumen. It is a form of thermal oil production in which steam is injected into the reservoir through an upper well to reduce its viscosity, causing the heated oil to drain into a lower wellbore, where it is pumped out. The steam condenses inside the formation generating large quantities of produced water. This produced water has very challenging physical and chemical properties which include: oil, grease, silica, hardness and organics.

Regulations limit freshwater withdrawal and produced water disposal, forcing the Oil & Gas industry to recycle and reuse


more than 95% of their water. The produced water must be treated before reuse as bitumen production requires continuous steaming, and boilers require clean water to prevent scaling. A viable wastewater treatment process is crucial to maximizing the production of SAGD oil extraction.

Most SAGD facilities will typically use a precipitation softening process. This involves using a warm lime softener (WLS) for silica removal, followed by filtration for suspended solids removal, and a weak acid cation (WAC) ion exchange (IX) resin to remove dissolved calcium and magnesium ions.



DuPont is a provider of the IX resins used for water hardness removal. Most facilities use IX resins such as **DuPont™ AmberLite™ IRC83 H**, an osmotically stable resin with extremely high capacity. For plants that use strong acid cation (SAC) resins, IX resins such as **DuPont™ AmberLite™ IRC120 Na** or **DuPont™ AmberLite™ HPR1100 Na** can be used.

The implementation of reverse osmosis systems for tailing pond management can successfully aid in site recovery, using **FilmTec™ Eco Pro™** and **FilmTec™ Fortilife™ series elements**.

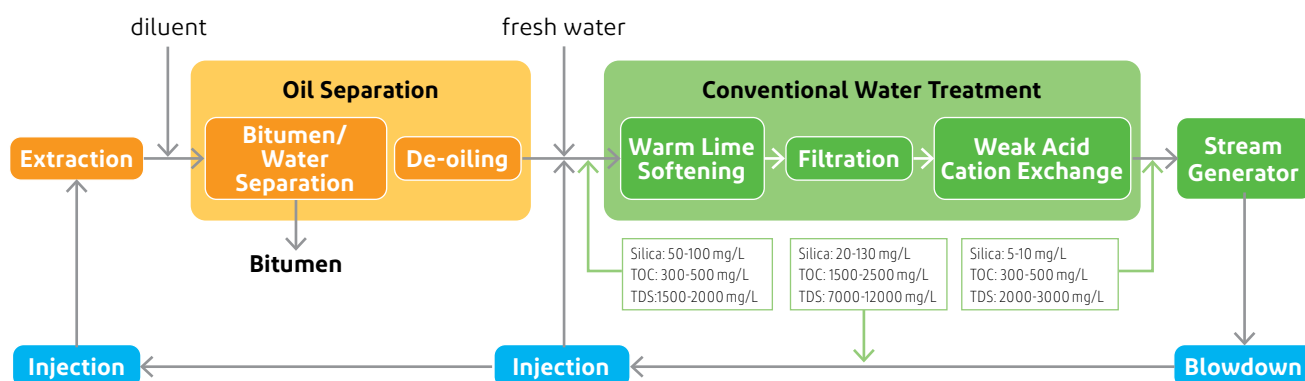

## The resources for optimal operation

DuPont provides the support you need to operate productively and minimize unscheduled downtime. From the stability of manufacturing on a global scale to technical expertise in addressing challenging conditions and situations, we are here to help – with system design, field support, plant optimization and more.

### Technical support

Our technical service and development specialists can work with you at any point in the design and operation of your plant to optimize performance; from water quality evaluation and system design consultation with our Water Application Value

Engine (WAVE) design software, to monitoring and analyzing operational data, to troubleshooting and problem solving.

### Research and development

DuPont has been a partner with the water treatment industry for decades, with a history of innovations in ion exchange and membrane technologies driving key improvements in productivity and efficiency. Our global R&D capabilities allow us to address specific local water conditions and requirements, with a holistic focus on water quality and component-based design and research, providing improved performance.





# Powering performance worldwide

With a large global manufacturing footprint, strong R&D expertise and technical support services and systems, we supply high market volumes with high quality. DuPont partners with you, our customer, to understand unmet needs and develop tailored solutions.

## TECHNICAL SERVICE, RESEARCH & DEVELOPMENT

Alphaville, Brazil  
Athlone, Ireland  
Chauny, France  
Edina, MN, USA  
Greifenberg, Germany  
Huzhou, China  
Hyderabad, India  
KAUST Jeddah, KSA  
Mexico City, Mexico  
Midland, MI, USA  
Shanghai, China  
Singapore  
Soma, Japan  
Tarragona, Spain\*  
Wilmington, DE, USA  
Windsor, Australia

## COMMERCIAL OPERATIONS

Bangkok, Thailand  
Beijing, China  
Budapest, Hungary  
Dubai, UAE  
Chengdu, China  
Delhi, India  
Edina, MN, USA  
Freienbach, Switzerland  
Greifenberg, Germany  
Guangzhou, China  
HCM City, Vietnam  
Hong Kong, China  
Jakarta, Indonesia  
Johannesburg, South Africa  
Kuala Lumpur, Malaysia  
Manila, Phillippine  
Marlborough, MA, USA  
Melbourne, Australia

Mexico City, Mexico  
Midland, MI, USA  
Milan, Italy  
Moscow, Russia  
Mumbai, India  
Nairobi, Kenya  
Neu Isenburg, Germany  
Newton, MA, USA  
Paris, France  
Sao Paulo, Brazil  
Seoul, Republic of Korea  
Shanghai, China  
Singapore  
Surabaya, Indonesia  
Taipei, China Taiwan  
Tokyo, Japan  
Warsaw, Poland  
Wilmington, DE, USA

## MANUFACTURING

Athlone, Ireland  
Chauny, France  
Edina, MN, USA  
Fombio, Italy  
Greifenberg, Germany  
Huzhou, China  
Jubail Industry City,  
Saudi Arabia  
Midland, MI, USA  
Qingpu, China  
Soma, Japan  
Windsor, Australia

\*Global Water  
Technology Center

Picture credits: iStock, DuPont Water Solutions



**Water Solutions**  
**[www.dupontwatersolutions.com](http://www.dupontwatersolutions.com)**

© 2023 DuPont. DuPont™, the DuPont Oval Logo, and all trademarks and service marks denoted with ™, SM or ® are owned by affiliates of DuPont de Nemours, Inc. unless otherwise noted.

All information set forth herein is for informational purposes only. This information is general information and may differ from that based on actual conditions. Customer is responsible for determining whether products and the information in this document are appropriate for Customer's use and for ensuring that Customer's workplace and disposal practices are in compliance with applicable laws and other government enactments. The product shown in this literature may not be available for sale and/or available in all geographies where DuPont is represented. The claims made may not have been approved for use in all countries. Please note that physical properties may vary depending on certain conditions and while operating conditions stated in this document are intended to lengthen product lifespan and/or improve product performance, it will ultimately depend on actual circumstances and is in no event a guarantee of achieving any specific results. DuPont assumes no obligation or liability for the information in this document. References to "DuPont" or the "Company" mean the DuPont legal entity selling the products to Customer unless otherwise expressly noted. NO WARRANTIES ARE GIVEN; ALL IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE ARE EXPRESSLY EXCLUDED. No freedom from infringement of any patent or trademark owned by DuPont or others is to be inferred.