



# dizzer<sup>®</sup> XL 1.5 MB 40 ST

## for T-Rack<sup>®</sup> 3.0 S

### Module Specifications

Part number		VK-5103		
Type of membrane <sup>[1]</sup>	Multibore <sup>®</sup> 1.5			
Active membrane area	m <sup>2</sup>	ft <sup>2</sup>	40	430
Length incl. T-piece (B)	mm	inch	1879	74.0
Module diameter (C)	mm	inch	250	9.8
Shipping weight	kg	lbs.	49	108
Casing material	PVC-U, white			


### T-Rack<sup>®</sup> Specifications

Weight (including modules and frame) <sup>[2]</sup>				
Shipping	kg / m <sup>2</sup>	lbs. / ft <sup>2</sup>	1.53	0.31
Filled	kg / m <sup>2</sup>	lbs. / ft <sup>2</sup>	3.57	0.73

Hold-up volume <sup>[2]</sup>				
Feed side	L / m <sup>2</sup>	US gal / ft <sup>2</sup>	0.77	0.019
Filtrate side	L / m <sup>2</sup>	US gal / ft <sup>2</sup>	0.63	0.015
Membrane structure	L / m <sup>2</sup>	US gal / ft <sup>2</sup>	0.39	0.010

- [1] Please refer to the latest version of the Multibore<sup>®</sup> datasheet.
- [2] Values given at ± 10% for indication only.
- [3] Rack parts without modules.
- [4] Tolerance to ISO 2768-1c. For length (A) please refer to the latest version of the T-Rack<sup>®</sup> 3.0 Series datasheet. Length excluding central header manifold

**Note:** For operating parameters, please refer to the latest version of the T-Rack<sup>®</sup> 3.0 Series datasheet.

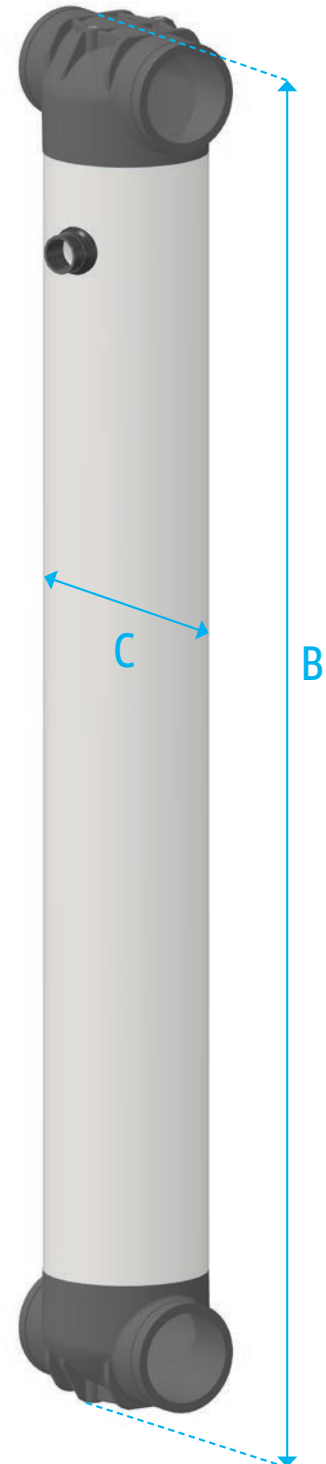

# dizzer® XL 1.5 MB 40 ST | for T-Rack® 3.0 S

Number of modules	T-Rack® 3.0 S unit	Part number <sup>[1]</sup>	Length (A) <sup>[4]</sup>		Membrane area	
			mm	ft.	m <sup>2</sup>	sq. ft.

## 2 rows configuration

4	TR-4-2-1-3.0-S	TD-3204	655	2.15	160	1722
6	TR-6-2-1-3.0-S	TD-3206	985	3.23	240	2583
8	TR-8-2-1-3.0-S	TD-3208	1315	4.31	320	3445
10	TR-10-2-1-3.0-S	TD-3210	1645	5.40	400	4306
12	TR-12-2-1-3.0-S	TD-3212	1975	6.48	480	5167
14	TR-14-2-1-3.0-S	TD-3214	2305	7.56	560	6028
16	TR-16-2-1-3.0-S	TD-3216	2635	8.65	640	6889
18	TR-18-2-1-3.0-S	TD-3218	2965	9.73	720	7750
20	TR-20-2-1-3.0-S	TD-3220	3295	10.81	800	8611
22	TR-22-2-1-3.0-S	TD-3222	3625	11.89	880	9473
24	TR-24-2-1-3.0-S	TD-3224	3955	12.98	960	10334
26	TR-26-2-1-3.0-S	TD-3226	4285	14.06	1040	11195
28	TR-28-2-1-3.0-S	TD-3228	4615	15.14	1120	12056
30	TR-30-2-1-3.0-S	TD-3230	4945	16.22	1200	12917
32	TR-32-2-1-3.0-S	TD-3232	5275	17.31	1280	13778
34	TR-34-2-1-3.0-S	TD-3234	5605	18.39	1360	15501
38	TR-38-2-1-3.0-S	TD-3238	6265	20.55	1520	16362
40	TR-40-2-1-3.0-S	TD-3240	6595	21.64	1600	17223

## 4 rows configuration

16	TR-16-4-1-3.0-S	TD-3416	1315	4.31	640	6889
20	TR-20-4-1-3.0-S	TD-3420	1645	5.40	800	8611
24	TR-24-4-1-3.0-S	TD-3424	1975	6.48	960	10334
28	TR-28-4-1-3.0-S	TD-3428	2305	7.56	1120	12056
32	TR-32-4-1-3.0-S	TD-3432	2635	8.65	1280	13778
36	TR-36-4-1-3.0-S	TD-3436	2965	9.73	1440	15501
40	TR-40-4-1-3.0-S	TD-3440	3295	10.81	1600	17223
44	TR-44-4-1-3.0-S	TD-3444	3625	11.89	1760	18945
48	TR-48-4-1-3.0-S	TD-3448	3955	12.98	1920	20667
52	TR-52-4-1-3.0-S	TD-3452	4285	14.06	2080	22390
56	TR-56-4-1-3.0-S	TD-3456	4615	15.14	2240	24112
60	TR-60-4-1-3.0-S	TD-3460	4945	16.22	2400	25834
64	TR-64-4-1-3.0-S	TD-3464	5275	17.31	2560	27557
68	TR-68-4-1-3.0-S	TD-3468	5605	18.39	2720	29279
72	TR-72-4-1-3.0-S	TD-3472	5935	19.47	2880	31001
76	TR-76-4-1-3.0-S	TD-3476	6265	20.55	3040	32723
80	TR-80-4-1-3.0-S	TD-3480	6595	21.64	3200	34446

The T-Rack® 3.0 S is designed to allow expansion as well as contraction (depending on temperature and pressure) and is therefore flexible. The maximum difference between the length of a T-Rack® 3.0 S in 'as-built' condition to the length after pressurizing is about 2 mm per T-piece composite coupling. The length indications given here are valid after full expansion of the T-Rack® 3.0 S.

## Contact

inge GmbH  
 Flurstrasse 27  
 86926 Greifenberg, Germany  
 Phone +49 8192 997-700  
 Fax +49 8192 997-999  
 inge@dupont.com  
 www.dupontwatersolutions.com

## Note

The descriptions, designs, data and product information contained herein are presented in good faith and are based on inge GmbH's current knowledge and experience. inge GmbH cannot accept any liability for the accuracy of this product information, which is provided at no charge and for guidance only. inge® products are designed to be operated in accordance with the corresponding inge® product documentation. The product information and products are protected by copyright and/or other intellectual property laws worldwide. However, inge GmbH cannot guarantee that the product information and products can be used without infringing third party intellectual property rights. The products and product information may only be used, distributed and marketed with the express prior permission of inge GmbH. No warranties of any kind regarding the products, either expressed or implied, including, but not limited to, warranties of merchantability, fitness for a particular purpose or no third party rights are made, other than as expressly set out in the contractual agreement with the customer. Mechanical stability and full functionality of inge® products can only be provided by genuine inge® parts. inge GmbH reserves the right to modify products and product information at any time without prior information. Current product information can be obtained from the website [www.dupontwatersolutions.com](http://www.dupontwatersolutions.com)