



DUPONT™ TYVEK® DRAINVENT™ RAINSCREEN



HELPS PROLONG THE LIFE OF EXTERIOR CLADDING

Creates an air gap that helps prevent rot, cracking and peeling problems by promoting moisture movement and ventilation behind the wall cladding.



IDEAL FOR STUCCO AND STONE

Tyvek® DrainVent™ replaces one layer of weather-resistant barrier (WRB) required with stucco and stone. Attached heavy-duty filter fabric prevents mortar and stucco infiltration.



EASY INSTALLATION

Patent-pending honeycomb design lays flat and is easy to install with 1/2" staples or nails. Features built-in insect screen flap.

DuPont™ Tyvek® DrainVent™ Rainscreen provides advanced protection against moisture damage in exterior wall systems.

Tyvek® DrainVent™ Rainscreen is a three-dimensional honeycomb-textured drainage mat with attached heavy-duty filter fabric that provides:

- A flat surface for cladding application
- Optimal compression resistance
- Multi-directional channels for drainage and airflow

Peace of mind with peak performance

Tyvek® DrainVent™ Rainscreen provides assurance that water will drain out of the wall.

Ease of installation

Tyvek® DrainVent™ is easy to cut and install; lays flat; and rolls tight against corners, helping protect against poor installation and detailing errors.

Trusted quality and durability

Tyvek® DrainVent™ is part of the complete DuPont™ Tyvek® product portfolio.

10-year warranty

Tyvek® DrainVent™ has a 10-year limited product warranty and a 10-year limited product and labor warranty if installed correctly with DuPont™ Tyvek® system products.

Full support

The Tyvek® Specialist Network is available across the U.S. for additional product information and support.


DuPont™ Tyvek® DrainVent™ Rainscreen

Applications

- Stucco
- Stone veneer
- Brick
- Wood siding
- Fiber cement siding
- Metal panel systems
- Cedar shake and shingles

Properties

- 4' x 50' (1.2m x 15.2m) roll, 200 sq. ft. coverage per roll
- 6.8mm/0.27" thickness (gap size)
- 90-day UV rating
- >100 perms based on ASTM E96 (method B)
- Class "A" fire rating per ASTM E84
- Mold and mildew resistant

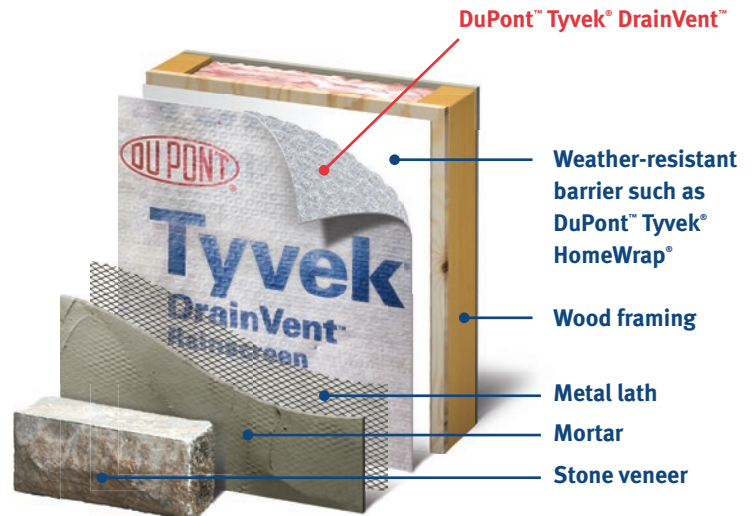

drainvent.tyvek.com

1-800-44-TYVEK



This information is based on technical data DuPont believes to be reliable and is subject to revision. It is intended for informational use by persons having technical skill for evaluation and at their own discretion and risk. Test results shown are preliminary and represent roll averages. Individual results may vary either above or below averages due to normal variations, while continuing to meet product specifications. Since conditions of use are outside our control, DuPont makes no warranties, express or implied, including, without limitation, no warranties of merchantability or fitness for a particular use and assumes no liability in connection with any use of this information. This information is not intended as license to use or infringe any trademark, patent or technical information.

Copyright © 2018 DuPont. All rights reserved. The DuPont Oval Logo, DuPont™, DrainVent™, HomeWrap® and Tyvek® are trademarks or registered trademarks of E.I. du Pont de Nemours and Company or its affiliates. K-29863 (11/18)

Tyvek.

