

# DuPont™ Kalrez® 9500

For Semiconductor SACVD and FCVD Applications

Technical Information - March, 2017

## Product Description

DuPont™ Kalrez® 9500 perfluoroelastomer parts are a tan product targeted specifically for deposition processes where ozone, ammonia and water vapor are used for processing, e.g. SACVD, FCVD, PECVD curing processes, etc. It has been specifically designed for use in applications where the plasma environment is more “chemical”, i.e., where oxygen and fluorine radicals are more dominant.

Kalrez® 9500 also offers outstanding thermal stability, very low outgassing and excellent mechanical strength and is well suited for both static and dynamic sealing applications. A maximum application temperature of 310°C (590°F) is suggested. Kalrez® 9500 can also withstand short-term excursions up to 325°C (617°F). Ultrapure post-cleaning and packaging is standard for all Kalrez® 9500 parts.



*Kalrez® 9500 parts are based on a proprietary crosslinking system which is only available from DuPont.*

## Features/Benefits

- Excellent resistance to ozone, ammonia, water vapor, etc.
- Low erosion rate and ultra-low particle generation in radical dominant oxygen and fluorine-based plasmas
- Excellent thermal stability
- Very low outgassing and metals content
- Excellent mechanical strength

## Suggested Applications

- Gas inlet/orifice/mixing block seals
- Chamber lid seals
- Isolation valve seals
- Bonded gate valves/slit valve door seals

## Typical Physical Properties<sup>1</sup>

Color	Tan
Hardness, Shore A (Plied Slab) <sup>2</sup>	76
Hardness, Shore M (O-ring) <sup>3</sup>	82
100% Modulus <sup>4</sup> , MPa (psi)	9.6 (1392)
Tensile Strength at Break <sup>4</sup> , MPa (psi)	16.4 (2379)
Elongation at Break <sup>4</sup> , %	193
Compression Set <sup>5</sup> , %	
70 hr. at 204 °C (400 °F)	20
70 hr. at 250 °C (482 °F)	36
70 hr. at 310 °C (590 °F)	59
Maximum Application Temperature <sup>6</sup> , °C (°F)	310 (590)

<sup>1</sup> Not to be used for specification purposes

<sup>2</sup> ASTM D2240 (plied slab test specimens)

<sup>3</sup> ASTM D2240 & D1414 (AS568 K214 O-ring test specimens)

<sup>4</sup> ASTM D412 (dumbbell test specimens)

<sup>5</sup> ASTM D395B & D1414 (AS568 K214 O-ring test specimens)


<sup>6</sup> DuPont proprietary test method



*The miracles of science™*

## Ozone Resistance

Ozone is routinely used for processing in SACVD processes. It can attack the crosslinking structure of elastomeric seal materials causing a loss of sealing functionality (compression set resistance) to occur. The following table shows the compression set properties of Kalrez® 9500 versus Kalrez® 8085 after exposure to 7.4% ozone by volume for 10 hours @ 100°C (212°F). Kalrez® 9500 was largely unaffected and retained its sealing functionality better than Kalrez® 8085.

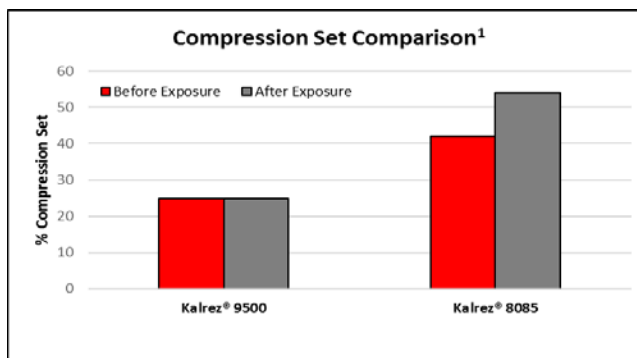

<sup>1</sup>ASTM D395 & D1414 AS568 K214 O-ring test specimens

Note: Color variations may be observed in DuPont™ Kalrez® 9500 parts.

Variations are considered to be cosmetic. See below for additional details. Please contact a Kalrez® Application Engineer if you have any questions or if you need any additional information.

### Marks (Dark Spots)

Small marks (dark spots) may be present in Kalrez® 9500 parts. The mark (dark spot) is a result of the curing process and is inherent in the part. It is not indicative of foreign matter and is not expected to have an adverse effect on the performance of the part in service.

### Darker Sealing Element — Bonded Door Seal (BDS)

The color of the sealing element in a Kalrez® 9500 bonded door seal (BDS) is darker than a Kalrez® 9500 O-ring for two reasons:

- 1) Kalrez® 9500 BDS are manufactured at different standard operating conditions versus Kalrez® 9500 O-rings.
- 2) Since the sealing element is bonded to aluminum on at least one or more sides, less light passes through it. In both cases, this is a color issue, i.e., the darker color is not indicative of foreign material present in the sealing element nor is it expected to have an adverse effect on the performance of Kalrez® 9500 BDS in service.

Visit us at [kalrez.dupont.com](http://kalrez.dupont.com) or [vespel.dupont.com](http://vespel.dupont.com)

Contact DuPont at the following regional locations:

**North America**  
800-222-8377

**Latin America**  
+0800 17 17 15

**Europe, Middle East, Africa**  
+41 22 717 51 11

**Greater China**  
+86-400-8851-888

**ASEAN**  
+65-6586-3688

**Japan**  
+81-2-5521-8484

The information provided in this data sheet corresponds to DuPont knowledge on the subject at the date of its publication. This information may be subject to revision as new knowledge and experience becomes available. The data provided fall within the normal range of product properties and relate only to the specific material designated; these data may not be valid for such material used in combination with any other materials, additives or pigments or in any process, unless expressly indicated otherwise.

The data provided should not be used to establish specification limits or used alone as the basis of design; they are not intended to substitute for any testing you may need to conduct to determine for yourself the suitability of a specific material for your particular purposes. Since DuPont cannot anticipate all variations in actual end-use and disposal conditions, DuPont does not guarantee results, makes no warranties and assumes no liability in connection with any use of this information. All such information is given and accepted at the buyer's risk. It is intended for use by persons having technical skill, at their own discretion and risk. Nothing in this publication is to be considered as a license to operate under or a recommendation to infringe any patent.

**CAUTION:** Do not use DuPont materials in medical applications involving implantation in the human body or contact with internal body fluids or tissues unless the material has been provided from DuPont under a written contract that is consistent with DuPont policy regarding medical applications and expressly acknowledges the contemplated use. For further information, please contact your DuPont representative. You may also request a copy of DuPont POLICY Regarding Medical Applications H-50103-5 and DuPont CAUTION Regarding Medical Applications H-50102-5.

Copyright © DuPont. The DuPont Oval Logo, DuPont™, The miracles of science™, Kalrez® is a trademark or registered trademark of E.I. du Pont de Nemours and Company or its affiliates. All rights reserved.

(03/17) Reference No. KZE-A10956-00-F0317



*The miracles of science™*