



# DUPONT™ SOLAMET® PV21A

## PHOTOVOLTAIC METALLIZATION

### PRODUCT DESCRIPTION

DuPont™ Solamet® PV21A photovoltaic metallization front side paste is a highly conductive silver composition with innovative material science which enables finer line design and excellent printability. This paste is able to be co-fired with back side (p-type) aluminum conductors such as DuPont™ Solamet® PV5xx tabbing silvers. It is designed for rapid dry and fast (spike) firing.

### PRODUCT BENEFITS

- Improved efficiency up to 0.1% over DuPont™ Solamet® PV20x series
- Superior metallization contact on LDE/ ultra LDE (standard or PERC cell)
- Excellent ink transfer capability at versatile fine line design
- High electrical conductivity after firing
- Reduced carrier recombination at Ag/Si interface
- Optimized for low stress and good soldered adhesion with excellent solderability
- Fast drying and firing
- Cadmium free\*

\*Cadmium 'free' as used herein means that cadmium is not an intentional ingredient in and is not intentionally added to the referenced product. Trace amounts however may be present.

### PROCESSING SUMMARY

#### Application

Standard screen print process

#### Printing

Speed: 200 – 350 mm/sec

#### Screen Type

325, 360, 380, 400 and 430 mesh stainless steel (SS) preferred for  $\leq 40\mu\text{m}^*$   
High open ratio screens with heavy calendar preferred for  $< 35\mu\text{m}^*$

\*Narrow side of screen pattern

	(I)	(II)	(III)	(IV)	(V)
Mesh (stainless steel)	325	360	380	400	430
Wire Diameter ( $\mu\text{m}$ )	16	16	14	16	13
Mesh Thickness ( $\mu\text{m}$ )	17-28				
Emulsion Thickness ( $\mu\text{m}$ )	12 - 18				
Mesh Angle (degrees)	22 - 30				

### Drying

Vertical Dryer 170 – 230°C 10 minutes

IR Belt Dryer 150 – 400°C 1 min

Flexible in accordance with industry practice. Actual settings to be determined by dryer type

### Typical Line Resolution

30 – 40 $\mu\text{m}^*$  screen designed width

### Soldering

Compatible with industry standard material & condition.

Flux type: non-clean, reactivity level L0/M0. (Standard: ANSI/J-STD-004)

Ribbon: Compatible with Pb contained and Pb free solder material, i.e. 60Sn/40Pb, 62Sn/36Pb/2Ag, 96.5Sn/3.5Ag

**TABLE 1: TYPICAL PHYSICAL PROPERTIES**

Test	Properties
Viscosity (Pa.S) (Brookfield HBT, 20 rpm, SC4-14/6R utility cup and spindle, 15°C)	200-320
Solids (%) at 750°C	91 – 93
Fineness of Grind (4th / 50%)	$\leq 12\mu\text{m}$ / $\leq 6\mu\text{m}$
Resistivity ( $\text{m } \Omega$ /sq/10 $\mu\text{m}$ )	< 5
Thinner	9450
Shelf Life (months)	6

### PASTE PREPARATION

The composition should be thoroughly mixed before use to ensure good printing performance. Several pre-treatment methods are recommended:

- Hand mixing thoroughly.
- Thinky 60-180 sec, temperature controlled at 25-35°C.
- Jar rolling 12-48 hours under 30 rpm. Jar rolling over 48 hours is not recommended due to changes in rheological behavior. Care should be taken to avoid air entrapment.

### PRINTING

Printing should be carried out in a clean, well-ventilated area. Solamet® PV21A photovoltaic composition, in its container, should be at ambient temperature prior to commencement of printing.



## DUPONT™ SOLAMET® PV21A

### FIRING

Solamet® PV21A is designed for rapid (spike) firing. To get the best electrical performance, PV21A should be fired at a peak temperature similar to Solamet® PV20x. Firing optimization is strongly recommended. See chart 1 for typical firing profile. Actual furnace settings and belt speed will depend on the wafer thickness, texturing and emitter resistivity as these influence the temperature of the wafer during firing. It is important that wafers are fired in a well-ventilated furnace, with a continuous supply of clean filtered air. Airflow and extraction rates should be optimized to ensure that oxidizing conditions exist within the furnace firing chamber, especially when front and back side conductors are co-fired.

### THINNER

Solamet® PV21A composition is optimized for screen printing and thinning is not normally required. Use the DuPont recommended thinner for slight adjustments to viscosity or to replace evaporation losses. The use of too much thinner or the use of a non recommended thinner may affect the rheological behavior of the material and its printing characteristics. Please refer to table 1.


### STORAGE

Containers may be stored in a clean, stable environment at room temperature (between 5°C – 25°C) with their lids tightly sealed. Storage in high temperature (>25°C) or in freezers (temperature <0°C) is NOT recommended as this could cause irreversible changes in the material.

### SAFETY AND HANDLING

For information on health and safety regulations please refer to the specific product MSDS.

### CHART 1. TYPICAL FIRING PROFILE

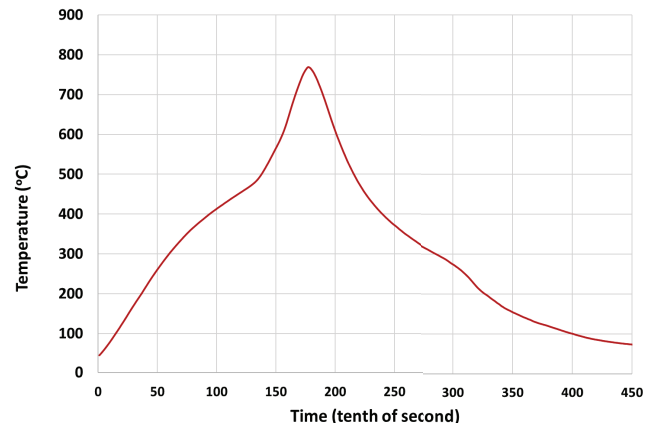

## FOR MORE INFORMATION ON DUPONT™ SOLAMET® PV21A OR OTHER DUPONT PRODUCTS, PLEASE CONTACT YOUR LOCAL REPRESENTATIVE:

### Americas

**E.I. DuPont**  
Chestnut run plaza, B708  
974 Centre Rd, Wilmington 19805  
U.S.A  
Tel. +1 302 668 9085

### Europe, Middle East & Africa

**DuPont (U.K.) Ltd**  
Bristol & Bath Science Park  
Dirac Crescent, Emersons Green  
Bristol, BS16 7FR  
U.K.  
Tel. +44 117 970 9667  
Tel. +39 02 9262 9346

### Asia

**DuPont Electronic Materials K.K.**  
KSP R&D B213, 2-1  
Sakado 3-chome, Takatsu-ku,  
Kawasaki-shi, Kanagawa, 213-0012  
Japan  
Tel. +81 44 820 7575

### DuPont Taiwan Ltd

45, Hsing-Pont Road  
Taoyuan, 330  
Taiwan  
Tel. + 886 3 377 3616

### DuPont China Holding Co. Ltd

600 Cailun Road  
Zhangjiang Hi-Tech Park  
Shanghai, China 201203  
PRC  
Tel. +86 21 3862 2888

### DuPont Korea Inc.

3-5th Floor, Asia tower #726,  
Yeoksam-dong #430,  
Nonhyeon-ro, Gangnam-gu  
Seoul 06223  
Korea  
Tel. +82 2 2222 5275

### E. I. DuPont India Private Limited

7th Floor, Tower C, DLF Cyber Greens,  
Sector-25A, DLF City, Phase-III  
Gurgaon 122 002 Haryana, India  
Tel. +91 124 4091818

### DuPont Company (Singapore) Pte Ltd

21 Biopolis Road  
#06-21 Nucleos South Tower  
Singapore 138567  
Tel. +65 6586 3022

[photovoltaics.dupont.com](http://photovoltaics.dupont.com)

NO PART OF THIS MATERIAL MAY BE REPRODUCED, STORED IN A RETRIEVAL SYSTEM OR TRANSMITTED IN ANY FORM OR BY ANY MEANS ELECTRONIC, MECHANICAL, PHOTOCOPYING, RECORDING OR OTHERWISE WITHOUT THE PRIOR WRITTEN PERMISSION OF DUPONT.

The information set forth herein is furnished free of charge and is based on technical data that DuPont believes to be reliable. It is intended for use by persons having technical skill, at their own discretion and risk. The handling precaution information contained herein is given with the understanding that those using it will satisfy themselves that their particular conditions of use present no health or safety hazards. Because conditions of product use are outside our control, we make no warranties, express or implied, and assume no liability in connection with any use of this information. As with any material, evaluation of any compound under end-use conditions prior to specification is essential. Nothing herein is to be taken as a license to operate under or a recommendation to infringe any patents.

CAUTION: Do not use in medical applications involving permanent implantation in the human body or contact with internal body fluids or tissues. For other medical applications, see "DuPont Medical Caution Statement," H-50102

Copyright © 2018 DuPont. All rights reserved. The DuPont Oval Logo, DuPont™, and all DuPont products denoted with ® or ™ are registered trademarks or trademarks of E. I. du Pont de Nemours and Company or its affiliates. K-29884 (05/18)