



TM127S BU

DuPont™ ProShield® 6 SFR

DuPont™ ProShield® 6 SFR Hooded Coverall. Non-hazardous particle protection and secondary flame-resistance in one garment. For use over primary FR clothing. Blue coverall features a standard fit hood, elastic wrists and ankles, a storm flap, and a pin lock slider zipper pull. Suitable for oil & gas, welding, maintenance, and dirty jobs requiring secondary FR protection.

Name	Description
Full Part Number	TM127SBUxx0025yy (xx=size;yy=option code)
Fabric/Materials	PROSHIELD® 6SFR
Design	Coverall w/ Hood, Elastic Wrists and Ankles
Seam	Serged
Color	Blue
Quantity/Box	25 per case
Sizes	MD, LG, XL, 2X, 3X, 4X, 5X, 6X, 7X
Option Codes	00

FEATURES & PRODUCT DETAILS

ProShield® 6 SFR is a Lightweight, disposable overgarment designed to help protect and preserve primary flame-resistant garments. It provides a barrier against non-hazardous particles and aerosols while not contributing to burn injury.

ProShield® 6 SFR garments won't ignite and continue to burn when exposed to a flame source. They are flame retardant treated, not inherently flame resistant, and are intended to be worn over your primary flame resistant garments.


- Pin locking slider locks in place when the pins on the puller are pushed into the zipper elements
- Attached hood with elastic around face opening.
- Elastic opening for tighter fit at wrist
- Elastic opening for tighter fit at ankle
- Manufactured under specifications that do not contain natural rubber latex
- Stormflaps.

AVAILABLE OPTIONS

Option Code	Description	Sizes	Part Number
00	Standard	MD,LG,XL,2X,3X,4X,5X,6X,7X	TM127SBUXL002500

SPECIFICATIONS

- The garment shall be constructed of DuPont™ ProShield® 6 SFR -- a nonwoven wood-pulp/polyester fabric that is treated to provide flame retardancy and liquid repellancy characteristics.
- The garment shall be blue in color.
- The garment shall be a hooded coverall design.
- The garment shall have serged seams.
- The garment shall have a standard hood with elastic around the face.
- The garment shall have a front zipper closure.
- The garment shall have elastic wrists.
- The garment shall have elastic ankles.

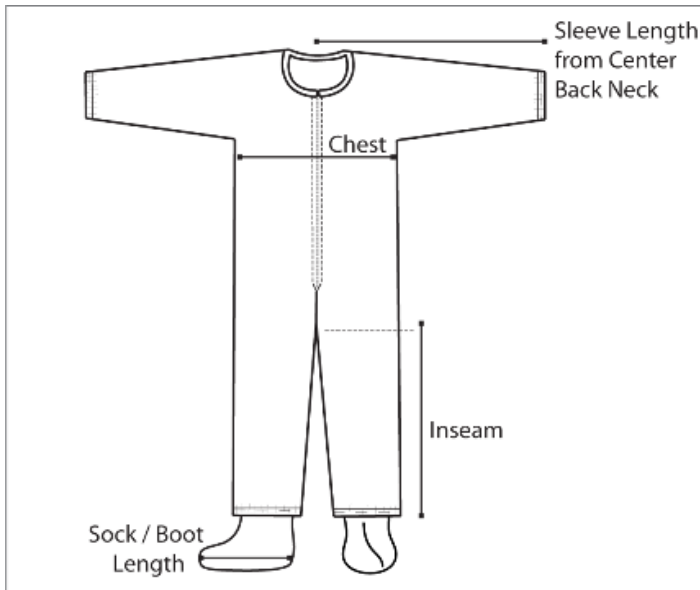

FINISHED DIMENSIONS

Size	Sleeve Length	Chest Width	Inseam	Fits Chest	Fits Height
MD	33 3/4	24 1/4	28	35 1/4 - 38 3/4	5'3" - 5'7"
LG	35	25 3/4	29	38 1/4 - 41 3/4	5'5" - 5'9"
XL	36 1/2	27 1/4	29 1/2	41 1/4 - 44 3/4	5'8" - 6'2"
2X	38 1/4	28 3/4	30 1/2	44 1/4 - 47 3/4	6'0" - 6'4"
3X	38 1/2	30 1/4	31 1/2	47 1/4 - 50 3/4	6'2" - 6'4"
4X	39 1/2	32	32 1/2	50 3/4 - 54 1/4	6'4" - 6'7"
5X	40 1/2	33 1/2	33 1/2	53 3/4 - 57 1/4	6'7" - 6'10"
6X	41	35.25	34.75	57 1/4 - 60 3/4	6'9" - 7'1"
7X	42	37.25	35.75	61 1/4 - 64 3/4	7'0" - 7'4"

ADDITIONAL EQUIPMENT NEEDED

- ProShield® 6 SFR For flash fire and electric arc hazards, partial body protective Tychem® 6000 FR garments must be used in conjunction with primary flame resistant clothing that is rated for the fire/arc hazard. Garments are flame retardant treated, not inherently flame resistant, and are intended to be worn over primary flame-resistant garments. ProShield® 6 SFR garments will not provide thermal / fire protection if worn alone.
- Wear other appropriate PPE such as, but not limited to, respiratory, eye, head, hand, and foot protection based on the hazard assessment.

Physical Properties



Data relating to mechanical performance of the fabrics used in DuPont chemical protective clothing, listed for the selected garment according to the test methods and relevant European standard, if applicable. Such properties, including abrasion and flex-cracking resistance, tensile strength and puncture resistance can help in the assessment of protective performance.

Property	Test Method	Typical Result
Thickness	ASTM D1777	9.5 mils
Basis Weight	ASTM D3776	2.4 oz/yd ²
Burst Strength - Mullen	ISO 2758	36 psi
Seam Strength	ASTM D1683	12 lb _f
Breaking Strength - Grab (MD)	ASTM D5034	30 lb _f
Breaking Strength - Grab (CD)	ASTM D5034	20 lb _f
Water Impact Penetration	AATCC 42	18.2 g H ₂ O
Wearing Apparel Flammability	16 CFR 1610	Class 1

SPECIAL WARNINGS

- *Serged and bound seams are degraded by some hazardous liquid chemicals, such as strong acids, and should not be worn when these chemicals are present.
- *Liquid barrier performance varies based on the amount of liquid that may get on the garment, the length of time the liquid is on the garment, applied pressure and certain physical properties of the liquid. Tyvek®400, Tyvek® 400 D, ProShield®, ProShield® 10, ProShield® 60, Tyvek® 400 FC, and ProShield® 70 garments are not appropriate if during use they are getting wet (liquid is dripping or running, or it is wet to the touch) or if spotting is observed on skin or garments worn under the protective garment. Tyvek® 500 and Tyvek® 600 offer improved liquid barrier, but may not be appropriate if spotting is observed on the skin or garments worn under the protective garment. In applications where a higher liquid barrier is needed, consider Tychem® 2000 and Tychem® 4000 garments with taped seams.
- *CAUTION: This information is based upon technical data that DuPont believes to be reliable. It is subject to revision as additional knowledge and experience are gained. DuPont makes no guarantee of results and assumes no obligation or liability in connection with this information. It is the user's responsibility to determine the level of toxicity and the proper personal protective equipment needed. The information set forth herein reflects laboratory performance of fabrics, not complete garments, under controlled conditions. It is intended for informational use by persons having technical skill for evaluation under their specific end-use conditions, at their own discretion and risk. Anyone intending to use this information should first verify that the garment selected is suitable for the intended use. In many cases, seams and closures have shorter breakthrough times and higher permeation rates than the fabric. Please contact DuPont for specific data. If fabric becomes torn, abraded or punctured, or if seams or closures fail, or if attached gloves, visors, etc. are damaged, end user should discontinue use of garment to avoid potential exposure to chemical. Since conditions of use are outside our control, we make no warranties, express or implied, including, without limitation, no warranties of merchantability or fitness for a particular use and assume no liability in connection with any use of this information. This information is not intended as a license to operate under or a recommendation to infringe any patent or technical information of DuPont or others covering any material or its use.

Cellosolve® and Selexol™ are registered trademarks of Dow Chemicals Company. Skydrol® is a registered trademark of Solutia.

- As of January 2023, all DuPont Personal Protection products are manufactured under specifications that exclude components containing natural rubber latex. Tyvek® 500, Tyvek® 600 and Tyvek® 800 styles made before January 2023 contain natural rubber latex, which may cause allergic reactions in some sensitized individuals. Anyone who begins to exhibit an allergic response during the use of DuPont products should immediately cease using these products and should report it to DuPont at +1 (888) 439-2988 so that an investigation can be initiated.