



TM122S BU

# DuPont™ ProShield® 6 SFR

DuPont™ ProShield® 6 SFR Coverall. Standard Fit Hood. Stormflap. Elastic Wrists. Attached Socks. Serged Seams. Semi-auto locking slider zipper pull. Blue.

Name	Description
Full Part Number	TM122SBUxx0025yy (xx=size;yy=option code)
Fabric/Materials	PROSHIELD® 6SFR
Design	Coverall w/ Hood, Elastic Wrists, Att. Socks
Seam	Serged
Color	Blue
Quantity/Box	25 per case
Sizes	SM, MD, LG, XL, 2X, 3X, 4X, 5X, 6X
Option Codes	00

## FEATURES & PRODUCT DETAILS

ProShield® 6 SFR is a Lightweight, disposable overgarment designed to help protect and preserve primary flame-resistant garments. It provides a barrier against non-hazardous particles and aerosols while not contributing to burn injury.

ProShield® 6 SFR garments won't ignite and continue to burn when exposed to a flame source. They are flame retardant treated, not inherently flame resistant, and are intended to be worn over your primary flame resistant garments.


- Zipper features a semi-automatic locking slider allowing the puller to stay down and in a locked position
- Attached hood with elastic around face opening.
- Elastic opening for tighter fit at wrist
- Integrated socks composed of garment material
- Manufactured under specifications that do not contain natural rubber latex.
- Stormflaps.

AVAILABLE OPTIONS

Option Code	Description	Sizes	Part Number
00	Standard	SM,MD,LG,XL,2X,3X,4X,5X,6X	TM122SBUxx002500

## SPECIFICATIONS

- The garment shall be constructed of DuPont™ ProShield® 6 SFR -- a nonwoven wood-pulp/polyester fabric that is treated to provide flame retardancy and liquid repellancy characteristics.
- The garment shall be blue in color.
- The garment shall be a hooded coverall design.
- The garment shall have serged seams.
- The garment shall have a standard hood with elastic around the face.
- The garment shall have a front zipper closure.
- The garment shall have elastic wrists.
- The garment shall have attached socks.
- The garment shall have soles made of garment material.

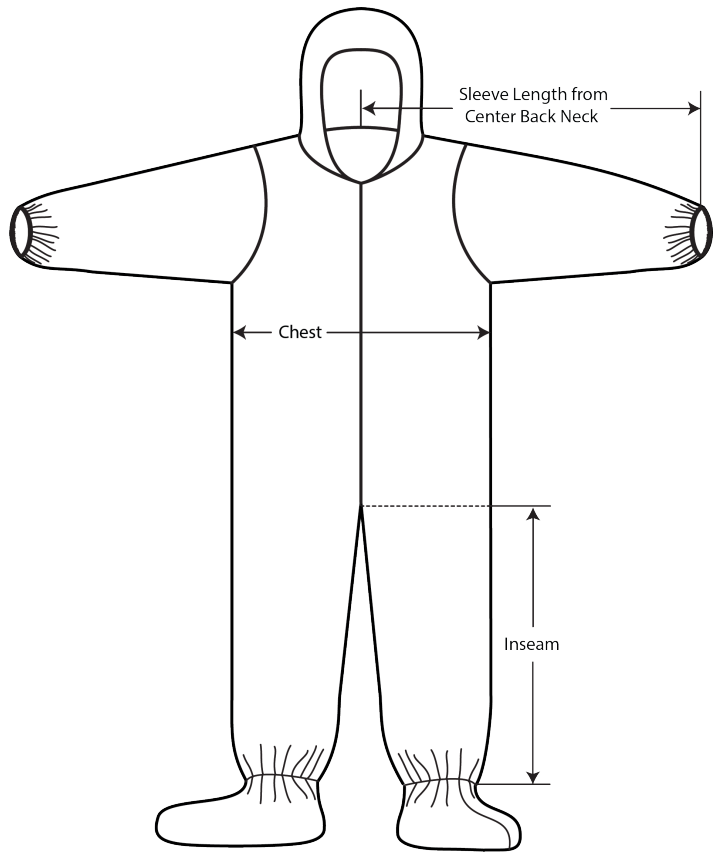

## FINISHED DIMENSIONS

Size	Sleeve Length	Chest Width	Inseam	Fits Chest	Fits Height	Boot Length
SM	33 3/4	24 1/4	28	35 1/4 - 38 3/4	5'0" - 5'7"	14 1/4
MD	33 3/4	24 1/4	28	35 1/4 - 38 3/4	5'3" - 5'7"	14 1/4
LG	35	25 3/4	29	38 1/4 - 41 3/4	5'5" - 5'9"	14 1/4
XL	36 1/2	27 1/4	29 1/2	41 1/4 - 44 3/4	5'8" - 6'2"	14 1/4
2X	38 1/4	28 3/4	30 1/2	44 1/4 - 47 3/4	6'0" - 6'4"	14 1/4
3X	38 1/2	30 1/4	31 1/2	47 1/4 - 50 3/4	6'2" - 6'4"	14 1/4
4X	39 1/2	32	32 1/2	50 3/4 - 54 1/4	6'4" - 6'7"	14 1/4
5X	40 1/2	33 1/2	33 1/2	53 3/4 - 57 1/4	6'7" - 6'10"	14 1/4
6X	41 1/2	35 1/2	34 1/2	57 3/4 - 61 1/4	6'9" - 7'1"	14 1/4

## ADDITIONAL EQUIPMENT NEEDED

- ProShield® 6 SFR For flash fire and electric arc hazards, partial body protective Tychem® 6000 FR garments must be used in conjunction with primary flame resistant clothing that is rated for the fire/arc hazard. Garments are flame retardant treated, not inherently flame resistant, and are intended to be worn over primary flame-resistant garments. ProShield® 6 SFR garments will not provide thermal / fire protection if worn alone.
- Wear other appropriate PPE such as, but not limited to, respiratory, eye, head, hand, and foot protection based on the hazard assessment.
- Wear separate appropriate outer footwear over the garment sock. This garment has attached socks made of garment material. These socks are not suitable to used as outer footwear. They do not have adequate durability or slip resistance to be worn as the outer foot covering. (15)

## Physical Properties



Data relating to mechanical performance of the fabrics used in DuPont chemical protective clothing, listed for the selected garment according to the test methods and relevant European standard, if applicable. Such properties, including abrasion and flex-cracking resistance, tensile strength and puncture resistance can help in the assessment of protective performance.

Property	Test Method	Typical Result
Thickness (PPSH-249)	ASTM D1777	9.5 mils
Basis Weight	ASTM D3776	2.4 oz/yd <sup>2</sup>
Burst Strength - Mullen.	ISO 2758	36 psi
Seam Strength	ASTM D1683	12 lb <sub>f</sub>
Breaking Strength - Grab (MD).	ASTM D5034	30 lb <sub>f</sub>
Breaking Strength - Grab (CD)	ASTM D5034	20 lb <sub>f</sub>
Water Impact Penetration	AATCC 42	18.2 g H <sub>2</sub> O
Wearing Apparel Flammability	16 CFR 1610	Class 1



## SPECIAL WARNINGS

- \*Serged and bound seams are degraded by some hazardous liquid chemicals, such as strong acids, and should not be worn when these chemicals are present.
- \*Liquid barrier performance varies based on the amount of liquid that may get on the garment, the length of time the liquid is on the garment, applied pressure and certain physical properties of the liquid. Tyvek®400, Tyvek® 400 D, ProShield®, ProShield® 10, ProShield® 60, Tyvek® 400 FC, and ProShield® 70 garments are not appropriate if during use they are getting wet (liquid is dripping or running, or it is wet to the touch) or if spotting is observed on skin or garments worn under the protective garment. Tyvek® 500 and Tyvek® 600 offer improved liquid barrier, but may not be appropriate if spotting is observed on the skin or garments worn under the protective garment. In applications where a higher liquid barrier is needed, consider Tychem® 2000 and Tychem® 4000 garments with taped seams.
- \*CAUTION: This information is based upon technical data that DuPont believes to be reliable. It is subject to revision as additional knowledge and experience are gained. DuPont makes no guarantee of results and assumes no obligation or liability in connection with this information. It is the user's responsibility to determine the level of toxicity and the proper personal protective equipment needed. The information set forth herein reflects laboratory performance of fabrics, not complete garments, under controlled conditions. It is intended for informational use by persons having technical skill for evaluation under their specific end-use conditions, at their own discretion and risk. Anyone intending to use this information should first verify that the garment selected is suitable for the intended use. In many cases, seams and closures have shorter breakthrough times and higher permeation rates than the fabric. Please contact DuPont for specific data. If fabric becomes torn, abraded or punctured, or if seams or closures fail, or if attached gloves, visors, etc. are damaged, end user should discontinue use of garment to avoid potential exposure to chemical. Since conditions of use are outside our control, we make no warranties, express or implied, including, without limitation, no warranties of merchantability or fitness for a particular use and assume no liability in connection with any use of this information. This information is not intended as a license to operate under or a recommendation to infringe any patent or technical information of DuPont or others covering any material or its use.

Cellosolve® and Selexol™ are registered trademarks of Dow Chemicals Company. Skydrol® is a registered trademark of Solutia.

- Tyvek® 500, Tyvek® 600, Tyvek® 800 products manufactured before January 2023 did contain natural rubber latex which may cause allergic reactions in some sensitized individuals. Anyone who begins to exhibit an allergic response during the use of DuPont products should immediately cease using these products. The incident should also be reported to DuPont at +1 (888) 439-2988 so that an investigation can be initiated.