



C3128T TN

DuPont™ Tychem® 5000

DuPont™ Tychem® 5000 Coverall. Respirator Fit Hood. Elastic Wrists. Attached Socks with Outer Boot Flaps. Storm Flap with Adhesive Closure. Taped Seams.Semi-auto locking slider zipper pull. Tan.

Name	Description
Full Part Number	C3128TTNxx0006yy (xx=size;yy=option code)
Fabric/Materials	TYCHEM® 5000
Design	Coverall w/ Resp. Fit Hood, Elastic Wrists, Att. Socks w/ Outer Boot Flaps
Seam	Taped
Color	Tan
Quantity/Box	6 per case
Sizes	SM, MD, LG, XL, 2X, 3X, 4X, 5X
Option Codes	00

FEATURES & PRODUCT DETAILS

Tychem® 5000 fabric is composed of a multi-layer film barrier laminated to a durable 2.0 oz/yd² polypropylene substrate. Tychem® 5000 fabric is strong and durable for rigorous activities and rugged situations involving liquid splash and provides barrier to a broad range of chemicals. Typical Applications: chemical handling, petro-chemical, hazardous materials/waste clean-up, fire departments, industrial hazmat teams, utilities, and domestic preparedness. Commonly used in domestic preparedness for situations where the potential to exposure to chemicals exist.


- Zipper features a semi-automatic locking slider allowing the puller to stay down and in a locked position
- Taped seams provide strong chemical resistance against heavy liquid splashes. A sewn seam is covered with a strip of compatible chemical-resistant material through heat sealing.
- Attached hood with elastic around face opening.
- Strong zipper for tough, flexible closure
- Storm flap covers zipper which can be sealed by the wearer with adhesive strip to prevent intrusion at zipper
- Elastic opening for tighter fit at wrist
- Integrated socks composed of garment material
- Attached flaps are designed to cover boot tops to help reduce potential for liquid intrusion
- Manufactured under specifications that do not contain natural rubber latex.
- Meets the U.S. industry requirements for blood (ASTM F1670) and viral penetration (ASTM F1671) protecting against several bloodborne pathogen exposure risks.

AVAILABLE OPTIONS

Option Code	Description	Sizes	Part Number
00	Standard	MD,LG,XL,2X,3X,4X,5X	C3128TTNxx000600

SPECIFICATIONS

- The garment shall be constructed of DuPont™ Tychem® 5000 -- a multi-layer composite barrier film laminated to a durable 2.0 oz/yd² polypropylene substrate.
- The garment shall be tan in color.
- The garment shall be a hooded coverall design.
- The garment shall have taped seams.
- The tape used to cover the seams shall be a film composite with equal to or greater chemical resistance than the base fabric.
- The garment shall have a respirator fit hood with elastic around the face.
- The garment shall have a front zipper closure.
- The zipper shall be covered with a storm flap with adhesive closure.
- The garment shall have elastic wrists.
- The garment shall have attached socks with outer boot flaps.
- The garment shall have soles made of garment material.

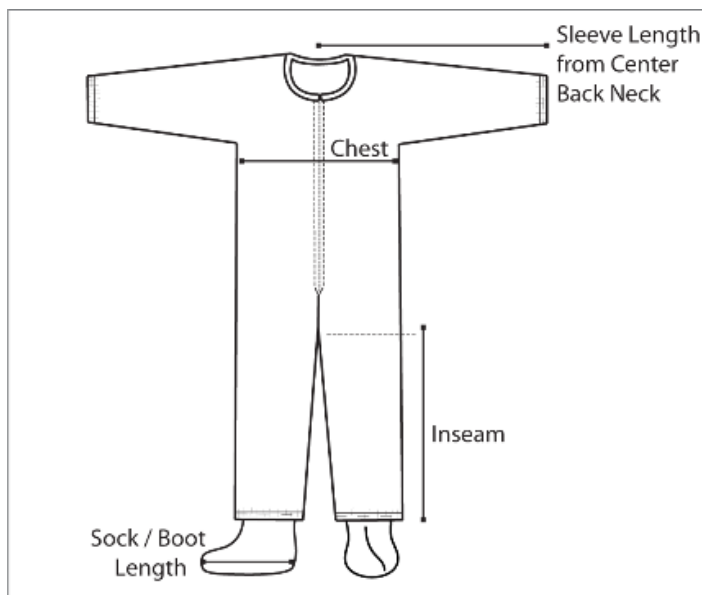

FINISHED DIMENSIONS

Size	Sleeve Length	Chest Width	Inseam	Fits Chest	Fits Height	Boot Length
MD	34	24	27 3/4	34 3/4 - 38 1/4	5'3" - 5'7"	13 1/4
LG	35	26	28 3/4	38 3/4 - 42 1/4	5'5" - 5'9"	13 1/4
XL	36 3/4	28	29 1/4	42 3/4 - 46 1/4	5'8" - 6'2"	13 1/4
2X	38	30	29 3/4	46 3/4 - 50 1/4	6'0" - 6'4"	13 1/4
3X	39	32	30 3/4	50 3/4 - 54 1/4	6'2" - 6'4"	13 1/4
4X	40 1/4	34 1/4	31 3/4	55 1/4 - 58 3/4	6'4" - 6'7"	13 1/4
5X	42 1/4	36 3/4	32 3/4	60 1/4 - 63 3/4	6'7" - 6'10"	13 1/4

ADDITIONAL EQUIPMENT NEEDED

- Please read, understand and follow the Tychem® User Manual.
- Wear other appropriate PPE such as, but not limited to, respiratory, eye, head, hand, and foot protection based on the hazard assessment.
- Wear separate appropriate outer footwear over the garment sock. This garment has attached socks made of garment material. These socks are not suitable to used as outer footwear. They do not have adequate durability or slip resistance to be worn as the outer foot covering. (15)

Physical Properties



Data relating to mechanical performance of the fabrics used in DuPont chemical protective clothing, listed for the selected garment according to the test methods and relevant European standard, if applicable. Such properties, including abrasion and flex-cracking resistance, tensile strength and puncture resistance can help in the assessment of protective performance.

Property	Test Method	Typical Result
Thickness (PPSH-249)	ASTM D1777	18 mils
Basis Weight	ASTM D3776	4.4 oz/yd ²
Tear Resistance - Trap Tear (MD)	ASTM D5587	23 lb _f
Tear Resistance - Trap Tear (CD)	ASTM D5587	29 lb _f
Breaking Strength - Grab (MD).	ASTM D5034	68 lb _f
Breaking Strength - Grab (CD)	ASTM D5034	60 lb _f
Wearing Apparel Flammability	16 CFR 1610	Class 1

CHEMICAL RESISTANCE

Hazard / Chemical Name	Cas Number	Phase	Normalized Break Through .
Acetaldehyde	75-07-0	Liquid	19
Acetic acid (>95%)	64-19-7	Liquid	34
Acetic acid 2 ethoxy ethyl ester	111-15-9	Liquid	>480
Acetic acid 2 methoxy ethyl ester	110-49-6	Liquid	>480
Acetic acid ethenyl ester	108-05-4	Liquid	>480
Acetic acid ethyl ester	141-78-6	Liquid	>480
Acetic acid pentyl ester	628-63-7	Liquid	>480
Acetic anhydride	108-24-7	Liquid	>480
Acetic chloride	75-36-5	Liquid	>480
Acetone	67-64-1	Liquid	462
Acetonitrile	75-05-8	Liquid	imm
Acetyl chloride	75-36-5	Liquid	>480
Acrolein	107-02-8	Liquid	25*/178
Acrylonitrile	107-13-1	Liquid	31
Acryloyl Chloride	814-68-6	Liquid	55
Adipic acid dinitrile	111-69-3	Liquid	>480
Adipic acid nitrile	111-69-3	Liquid	>480
Adiponitrile	111-69-3	Liquid	>480
Allyl alcohol	107-18-6	Liquid	>480
Allyl chloride	107-05-1	Liquid	12
Amino benzene	62-53-3	Liquid	320
Amino diphenyl, 4- (1 mg/ml in Methanol)	92-67-1	Liquid	>480
Amino ethanol, 2-	141-43-5	Liquid	>480
Amino ethylethanolamine	111-41-1	Liquid	>480
Amino ethylethanolamine (60%)	111-41-1	Liquid	>480
Amino ethylpiperazine	140-31-8	Liquid	>480
Amino propane, 2-	75-31-0	Liquid	15
Ammonia (-33 °C, liquid)	7664-41-7	Liquid	35
Ammonia (-70 °C, liquid)	7664-41-7	Liquid	>480
Ammonia (gaseous)	7664-41-7	Vapor	imm

Hazard / Chemical Name	Cas Number	Phase	Normalized Break Through .
Ammonium chloride (sat)	12125-02-9	Liquid	>480
Ammonium hydroxide (28% - 30%)	1336-21-6	Liquid	89
Amyl acetate, n-	628-63-7	Liquid	>480
Amyl alcohol	71-41-0	Liquid	>480
Amyl ester acetic acid	628-63-7	Liquid	>480
Aniline	62-53-3	Liquid	320
Anthracene (sat in Toluene)	120-12-7	Liquid	>480
Anthracin (sat in Toluene)	120-12-7	Liquid	>480
Azolidine	123-75-1	Liquid	342
Benzenamine	62-53-3	Liquid	320
Benzene	71-43-2	Liquid	>480
Benzene carbonyl chloride	98-88-4	Liquid	>480
Benzene sulfone chloride	98-09-9	Liquid	>480
Benzene sulfonyl chloride	98-09-9	Liquid	>480
Benzo nitrile	100-47-0	Liquid	450
Benzo trichloride	98-07-7	Liquid	>480
Benzoyl chloride	98-88-4	Liquid	>480
Benzyl chloride	100-44-7	Liquid	>480
Benzyl chloro formate	501-53-1	Liquid	>480
Benzyl cyanide	140-29-4	Liquid	>480
Black Liquor (mix)	mix	Liquid	>480
Boron trifluoride dimethyl etherate	353-42-4	Liquid	>480
Bromine	7726-95-6	Liquid	imm
Bromo 4-fluorobenzene, 1-	460-00-4	Liquid	>480
Bromo fluorobenzene, 4-	460-00-4	Liquid	>480
Butadiene, 1,3- (gaseous)	106-99-0	Vapor	>480
Butanol, 1-	71-36-3	Liquid	>480
Butanol, n-	71-36-3	Liquid	>480
Butanone	78-93-3	Liquid	>480
Butyl acetate, n-	123-86-4	Liquid	>480

Hazard / Chemical Name	Cas Number	Phase	Normalized Break Through .
Butyl alcohol, n-	71-36-3	Liquid	>480
Butyl amine	109-73-9	Liquid	>480
Butyl ether, n-	142-96-1	Liquid	117
Carbon disulfide	75-15-0	Liquid	imm
Carbon tetrachloride	56-23-5	Liquid	>480
Caustic ammonia (28% - 30%)	1336-21-6	Liquid	89
Caustic soda (50%)	1310-73-2	Liquid	>480
Cellosolve acetate	110-80-5	Liquid	>480
Chlor allylene	107-05-1	Liquid	12
Chlordane (44%)	57-74-9	Liquid	>480
Chlorine (-70 °C, liquid)	7782-50-5	Liquid	>480
Chlorine (gaseous)	7782-50-5	Vapor	imm
Chlorine sulfide (80%)	10545-99-0	Liquid	imm
Chloro 1-methylbenzene, 2-	95-49-8	Liquid	>480
Chloro 2,3-epoxy propane, 1-	106-89-8	Liquid	36*/67
Chloro acetic acid (80%)	79-11-8	Liquid	>480
Chloro acetone (95%)	78-95-5	Liquid	>480
Chloro acetyl chloride	79-04-9	Liquid	77
Chloro acrylonitrile, 2-	920-37-6	Liquid	146
Chloro benzene	108-90-7	Liquid	63
Chloro benzotrichloride, 4-	5216-25-1	Liquid	>480
Chloro benzotrifluoride, 4-	98-56-6	Liquid	460
Chloro ethanol, 2-	107-07-3	Liquid	>480
Chloro ethene	75-01-4	Vapor	>480
Chloro form	67-66-3	Liquid	imm
Chloro prene, 3-	107-05-1	Liquid	12
Chloro propan-2-one, 1- (95%)	78-95-5	Liquid	>480
Chloro toluene, alpha-	100-44-7	Liquid	>480
Chloro toluene, o-	95-49-8	Liquid	>480
Chlorsulfonic acid	7790-94-5	Liquid	330

Hazard / Chemical Name	Cas Number	Phase	Normalized Break Through .
Citric acid (50%)	77-92-9	Liquid	>480
Cresol o-	95-48-7	Liquid	198
Cumene	98-82-8	Liquid	364
Cyanobenzene	100-47-0	Liquid	450
Cyanoethylene	107-13-1	Liquid	31
Cyanomethane	75-05-8	Liquid	imm
Cyclo hexane	110-82-7	Liquid	>480
Cyclo octadiene	1552-12-1	Liquid	>480
Diaminoethane, 1,2-	107-15-3	Liquid	>480
Dibromo -3-chloropropane, 1,2-	96-12-8	Liquid	>480
Dibromoethane, 1,2-	106-93-4	Liquid	>480
Dichlorbenzen, 1,2-	95-50-1	Liquid	>480
Dichlorbenzen, 1,3-	541-73-1	Liquid	>480
Dichlorbenzen, 1,4- (50% in Ethanol)	106-46-7	Liquid	131
Dichlorethane, 1.2.-	107-06-2	Liquid	>480
Dichloro ethyl ether	111-44-4	Liquid	>480
Dichloro ethylene, 1,1-	75-35-4	Liquid	170
Dichloro methane	75-09-2	Liquid	imm
Dichloro propene, 1,3- (95%)	542-75-6	Liquid	imm
Dichloro propene, 2,3-	78-88-6	Liquid	280
Dicyanobutane, 1,4-	111-69-3	Liquid	>480
Diesel fuel	68334-30-5	Liquid	199
Diethanolamine	111-42-2	Liquid	>480
Diethyl amine	109-89-7	Liquid	>480
Diethyl aniline, N,N-	91-66-7	Liquid	>480
Diethyl ether	60-29-7	Liquid	>480
Diethyl hexyl phthalate	117-81-7	Liquid	>480
Diethyl sulfate	64-67-5	Liquid	>480
Diethylene triamine	111-40-0	Liquid	>480
Diisopropylethylamine (DIPEA)	7087-68-5	Liquid	>480

Hazard / Chemical Name	Cas Number	Phase	Normalized Break Through .
Dimethyl acetamide, N,N-	127-19-5	Liquid	>480
Dimethyl amine	124-40-3	Vapor	>480
Dimethyl aniline, N,N-	121-69-7	Liquid	imm
Dimethyl formamide, N,N-	68-12-2	Liquid	>480
Dimethyl ketal	67-64-1	Liquid	462
Dimethyl ketone	67-64-1	Liquid	462
Dimethyl maleate	624-48-6	Liquid	>480
Dimethyl phenylamine, N,N-	121-69-7	Liquid	imm
Dimethyl sulfate	77-78-1	Liquid	>480
Dimethyl sulfide	75-18-3	Liquid	>480
Dimethyl sulfoxide	67-68-5	Liquid	>480
Dioxane, 1,4-	123-91-1	Liquid	>480
Diphenyl methane diisocyanate, 4,4'- (50 °C, molten)	101-68-8	Liquid	>480
Disodium sulfide (60% (slurry))	1313-82-2	Liquid	>480
Dowtherm Heat Transfer Fluid	mix	Liquid	>480
Dytek® A	15520-10-2	Liquid	>480
Epichlorohydrin	106-89-8	Liquid	36*/67
Epoxy ethane (11 °C, liquid)	75-21-8	Liquid	18
Epoxy ethane (gaseous)	75-21-8	Vapor	12
Epoxy propane, 1,2-	75-56-9	Liquid	47
Ethane dioic acid (sat)	144-62-7	Liquid	>480
Ethane nitrile	75-05-8	Liquid	imm
Ethane thiol	75-08-1	Liquid	>480
Ethanol	64-17-5	Liquid	>480
Ethanol amine	141-43-5	Liquid	>480
Ethanoyl chloride	75-36-5	Liquid	>480
Ethoxy ethanol, 2-	110-80-5	Liquid	>480
Ethoxy ethylacetat	111-15-9	Liquid	>480
Ethyl Cellosolve®	110-80-5	Liquid	>480
Ethyl acetate	141-78-6	Liquid	>480

Hazard / Chemical Name	Cas Number	Phase	Normalized Break Through
Ethyl alcohol	64-17-5	Liquid	>480
Ethyl benzene	100-41-4	Liquid	>480
Ethyl ethanamine, N-	109-89-7	Liquid	>480
Ethyl ether	60-29-7	Liquid	>480
Ethyl glycol acetate	111-15-9	Liquid	>480
Ethyl mercaptan	75-08-1	Liquid	>480
Ethyl nitrile	75-05-8	Liquid	imm
Ethylene chlorohydrin	107-07-3	Liquid	>480
Ethylene diamine	107-15-3	Liquid	>480
Ethylene dibromide	106-93-4	Liquid	>480
Ethylene dichloride	107-06-2	Liquid	>480
Ethylene glycol acrylate	818-61-1	Liquid	>480
Ethylene glycol mono ethyl ether acetate	111-15-9	Liquid	>480
Ethylene glycol monoethyl ether	110-80-5	Liquid	>480
Ethylene glycol monomethyl ether	109-86-4	Liquid	405
Ethylene glycol monomethyl ether acetate	110-49-6	Liquid	>480
Ethylene oxide (11 °C, liquid)	75-21-8	Liquid	18
Ethylene oxide (gaseous)	75-21-8	Vapor	12
Ethylene tetrachloride	127-18-4	Liquid	>480
Ethylene trichloride	79-01-6	Liquid	>480
Fluorobenzene	462-06-6	Liquid	>480
Fluorosilicic acid (33-35%)	16961-83-4	Liquid	>480
Formaldehyde (37%)	50-00-0	Liquid	>480
Formalin (37% (10-15% Methanol))	50-00-0	Liquid	>480
Formalin (37%)	50-00-0	Liquid	>480
Formic acid (>95%)	64-18-6	Liquid	>480
Furaldehyde, 2-	98-01-1	Liquid	>480
Furfural	98-01-1	Liquid	>480
Gasoline, unleaded	86290-81-5	Liquid	>480
Glycol chlorohydrin	107-07-3	Liquid	>480

Hazard / Chemical Name	Cas Number	Phase	Normalized Break Through
Green Liquor (mix)	mix	Liquid	>480
Heptane	142-82-5	Liquid	>480
Hexamethylene diamine (50 °C, molten)	124-09-4	Liquid	45
Hexamethylene diisocyanate	822-06-0	Liquid	>480
Hexane, n-	110-54-3	Liquid	>480
Hexone	108-10-1	Liquid	>480
Hydriodic acid (55-57%)	10034-85-2	Liquid	>480
Hydrobromic acid (48%)	10035-10-6	Liquid	>480
Hydrochloric acid (37%)	7647-01-0	Liquid	>480
Hydrofluoric acid (48-51%)	7664-39-3	Liquid	>480
Hydrofluoric acid (70%)	7664-39-3	Liquid	126
Hydrogen chloride (gaseous)	7647-01-0	Vapor	>480
Hydrogen cyanide (27 °C, gaseous)	74-90-8	Vapor	30
Hydrogen fluoride (20-27 °C, gaseous)	7664-39-3	Vapor	186
Hydrogen peroxide (50%)	7722-84-1	Liquid	>480
Hydrogen sulfide	7783-06-4	Vapor	imm
Hydroxy 1,2,3-propanetricarboxylic acid, 2- (50%)	77-92-9	Liquid	>480
Hydroxy toluene, o-	95-48-7	Liquid	198
Hypophosphorus acid (50%)	6303-21-5	Liquid	>480
Isobutyl methyl ketone	108-10-1	Liquid	>480
Isopropanol	67-63-0	Liquid	>480
Isopropyl alcohol	67-63-0	Liquid	>480
Isopropyl amine	75-31-0	Liquid	15
Isopropyl benzene	98-82-8	Liquid	364
JP-8 Jet Fuel	94114-58-6	Liquid	>480
Kerosene	8008-20-6	Liquid	>480
Ketone propane	67-64-1	Liquid	462
Lewisite (L), MIL-STD-282 (10 g/m ²)	541-25-3	Liquid	120 ⁸
Limonene d-	5989-27-5	Liquid	>480
Mercapto acetic acid	68-11-1	Liquid	>480

Hazard / Chemical Name	Cas Number	Phase	Normalized Break Through
Mercury	7439-97-6	Liquid	>480
Methacrylic acid	79-41-4	Liquid	81
Methanethiol	74-93-1	Vapor	>480
Methanol	67-56-1	Liquid	imm
Methoxy 2-methylpropane, 2-	1634-04-4	Liquid	>480
Methoxy ethanol, 2	109-86-4	Liquid	405
Methoxy ethylacetate, 2-	110-49-6	Liquid	>480
Methyl 4-isopropenyl-1-cyclohexene, 1-	5989-27-5	Liquid	>480
Methyl Ethyl Ketone Peroxide (35%)	1338-23-4	Liquid	>480
Methyl acetyl	67-64-1	Liquid	462
Methyl amine (40%)	74-89-5	Liquid	140
Methyl benzol	108-88-3	Liquid	>480
Methyl chloride (gaseous)	74-87-3	Vapor	>480
Methyl chloroform	71-55-6	Liquid	>480
Methyl cyanide	75-05-8	Liquid	imm
Methyl ethyl ketone	78-93-3	Liquid	>480
Methyl formamide, N-	123-39-7	Liquid	>480
Methyl isocyanate	624-83-9	Liquid	12
Methyl ketone	67-64-1	Liquid	462
Methyl mercaptan	74-93-1	Vapor	>480
Methyl pentan-2-one, 4-	108-10-1	Liquid	>480
Methyl propenoic acid, 2-	79-41-4	Liquid	81
Methyl pyridine, 2-	109-06-8	Liquid	>480
Methyl pyridine, 3-	108-99-6	Liquid	>480
Methyl tert-butyl ether	1634-04-4	Liquid	>480
Methyl trichloromethane	71-55-6	Liquid	>480
Methyl trichlorosilane	75-79-6	Liquid	>480
Methylene bromide	74-95-3	Liquid	40
Methylene chloride	75-09-2	Liquid	imm
Methylene diphenyl diisocyanate, 4,4'- (50 °C, molten)	101-68-8	Liquid	>480

Hazard / Chemical Name	Cas Number	Phase	Normalized Break Through
N-Methylmorpholine (NMM)	109-02-4	Liquid	>480
Naphthalene	91-20-3	Solid	>480
Naphthalene (25% in Diethylene glycol dimethylether)	91-20-3	Liquid	>480
Nicotine	54-11-5	Liquid	>480
Nitric acid (90%)	7697-37-2	Liquid	>480
Nitro benzene	98-95-3	Liquid	>480
Nitro methane	75-52-5	Liquid	>480
Nitro propane, 2-	79-46-9	Liquid	>480
Norflurane	811-97-2	Vapor	>480
Oleum (65% free SO3)	8014-95-7	Liquid	15
Oxalic acid (sat)	144-62-7	Liquid	>480
PCB in transformer oil (mix)	mix	Liquid	>480
Pentanol, 1-	71-41-0	Liquid	>480
Pentyl acetate	628-63-7	Liquid	>480
Peracetic Acid (32%)	79-21-0	Liquid	>480
Phenethyl alcohol, 2-	60-12-8	Liquid	>480
Phenethylene	100-42-5	Liquid	>480
Phenol (45 °C, molten)	108-95-2	Liquid	17
Phenol (60 °C, molten)	108-95-2	Liquid	imm
Phenol (85%)	108-95-2	Liquid	341
Phenyl acetonitrile	140-29-4	Liquid	>480
Phenyl amine	62-53-3	Liquid	320
Phenyl chloride	108-90-7	Liquid	63
Phenyl cyanide	100-47-0	Liquid	450
Phenyl ethane	100-41-4	Liquid	>480
Phenyl ethanol, 1-	98-85-1	Liquid	>480
Phenyl propane, 2-	98-82-8	Liquid	364
Phosgene	75-44-5	Vapor	>480
Phosphinic acid (50%)	6303-21-5	Liquid	>480
Phosphoric acid (85%)	7664-38-2	Liquid	>480

Hazard / Chemical Name	Cas Number	Phase	Normalized Break Through .
Phosphorus oxychloride	10025-87-3	Liquid	410
Phosphorus trichloride	7719-12-2	Liquid	>480
Picoline, 2-	109-06-8	Liquid	>480
Picoline, 3-	108-99-6	Liquid	>480
Polymethylene polyphenyle isocyanate (p-MDI)	9016-87-9	Liquid	>480
Potassium carbonate (sat)	584-08-7	Liquid	>480
Potassium hydroxide (45%)	1310-58-3	Liquid	>480
Prop-2-en-1-al	107-02-8	Liquid	25*/178
Propan -2-ol	67-63-0	Liquid	>480
Propan -2-one	67-64-1	Liquid	462
Propen 1-ol, 2-	107-18-6	Liquid	>480
Propenenitrile, 2-	107-13-1	Liquid	31
Propenoic acid nitrile	107-13-1	Liquid	31
Propyl amine, n-	107-10-8	Liquid	100
Propyl bromide, n-	106-94-5	Liquid	>480
Propylene oxide, 1,2-	75-56-9	Liquid	47
Pyridine	110-86-1	Liquid	>480
Pyroacetic ether	67-64-1	Liquid	462
Pyrrolidine	123-75-1	Liquid	342
Sarin (GB), MIL-STD-282 (10 g/m ²)	107-44-8	Liquid	120 ⁸
Silicon tetrachloride	10026-04-7	Liquid	>480
Sodium cyanide (45%)	143-33-9	Liquid	>480
Sodium hydroxide (50%)	1310-73-2	Liquid	>480
Sodium hypochlorite (15%)	7681-52-9	Liquid	>480
Sodium metabisulphite (38%)	7681-57-4	Liquid	23
Soman (GD), MIL-STD-282 (10 g/m ²)	96-64-0	Liquid	>480 ⁸
Spiritus	64-17-5	Liquid	>480
Styrene	100-42-5	Liquid	>480
Sulfur Mustard (HD), MIL-STD-282 (10 g/m ²)	505-60-2	Liquid	120 ⁸
Sulfur trioxide	7446-11-9	Liquid	imm

Hazard / Chemical Name	Cas Number	Phase	Normalized Break Through .
Sulfuric acid (>95%)	7664-93-9	Liquid	>480
Sulfuric acid diethyl ester	64-67-5	Liquid	>480
Sulfuric acid dimethyl ester	77-78-1	Liquid	>480
Sulfuric acid fuming (65% free SO ₃)	8014-95-7	Liquid	15
Sulfuryl chloride	7791-25-5	Liquid	120
Sulphur dichloride (80%)	10545-99-0	Liquid	imm
Tetrachloro ethane, 1,1,2,2,-	79-34-5	Liquid	>480
Tetrachloro ethylene, 1,1,2,2-	127-18-4	Liquid	>480
Tetrachloro methane	56-23-5	Liquid	>480
Tetraethyl lead	78-00-2	Liquid	>480
Tetraethylene pentamine	112-57-2	Liquid	>480
Tetrafluoroethane, 1,1,1,2-	811-97-2	Vapor	>480
Tetrahydrofuran	109-99-9	Liquid	>480
Tetramethylethylene diamine (TMEDA)	110-18-9	Liquid	>480
Thioglycolic acid	68-11-1	Liquid	>480
Thionyl chloride	7719-09-7	Liquid	15
Titan(IV) chloride	7550-45-0	Liquid	120
Titanium tetrachloride	7550-45-0	Liquid	120
Toluene	108-88-3	Liquid	>480
Toluene diisocyanate, 2,4-	584-84-9	Liquid	>480
Toluene diisocyanate, 2,4- (80%)	584-84-9	Liquid	>480
Tributyl amine (95%)	102-82-9	Liquid	>480
Trichloro 1,2,2-trifluoroethane, 1,1,2-	76-13-1	Liquid	>480
Trichloro benzene, 1,2,4-	120-82-1	Liquid	>480
Trichloro ethane, 1,1,1-	71-55-6	Liquid	>480
Trichloro ethanol, 2,2,2-	115-20-8	Liquid	>480
Trichloro ethylene	79-01-6	Liquid	>480
Trichloro methane	67-66-3	Liquid	imm
Triethylentetramine (60%)	112-24-3	Liquid	>480
VX Nerve Agent, MIL-STD-282 (10 g/m ²)	50782-69-9	Liquid	>480 ⁸

Hazard / Chemical Name	Cas Number	Phase	Normalized Break Through
Vinyl acetate	108-05-4	Liquid	>480
Vinyl benzol	100-42-5	Liquid	>480
Vinyl carbinol	107-18-6	Liquid	>480
Vinyl chloride	75-01-4	Vapor	>480
Vinyl cyanide	107-13-1	Liquid	31
Vinyl ethylene (gaseous)	106-99-0	Vapor	>480
Vinylidene chloride	75-35-4	Liquid	170
White Liquor	mix	Liquid	>480
Xylene, mixed isomers	1330-20-7	Liquid	>480
Xylene, o-	95-47-6	Liquid	>480

BT0.1 Normalized breakthrough time at 0.1 µg/cm²/min [mins] CAS Chemical abstracts service registry number min
Minute > Larger than < Smaller than imm Immediate (< 10 min) nm Not tested sat Saturated solution N/A Not
Applicable na Not attained GPR grade General purpose reagent grade * Based on lowest single value 8 Actual

breakthrough time; normalized breakthrough time is not available DOT5 Degradation after 5 min DOT30 Degradation after 30 min DOT60 Degradation after 60 min DOT240 Degradation after 240 min BT1383 Normalized breakthrough time at 0.1 µg/cm²/min [mins] acc. ASTM F1383

SPECIAL WARNINGS

- ***CAUTION:** This information is based upon technical data that DuPont believes to be reliable. It is subject to revision as additional knowledge and experience are gained. DuPont makes no guarantee of results and assumes no obligation or liability in connection with this information. It is the user's responsibility to determine the level of toxicity and the proper personal protective equipment needed. The information set forth herein reflects laboratory performance of fabrics, not complete garments, under controlled conditions. It is intended for informational use by persons having technical skill for evaluation under their specific end-use conditions, at their own discretion and risk. Anyone intending to use this information should first verify that the garment selected is suitable for the intended use. In many cases, seams and closures have shorter breakthrough times and higher permeation rates than the fabric. Please contact DuPont for specific data. If fabric becomes torn, abraded or punctured, or if seams or closures fail, or if attached gloves, visors, etc. are damaged, end user should discontinue use of garment to avoid potential exposure to chemical. Since conditions of use are outside our control, we make no warranties, express or implied, including, without limitation, no warranties of merchantability or fitness for a particular use and assume no liability in connection with any use of this information. This information is not intended as a license to operate under or a recommendation to infringe any patent or technical information of DuPont or others covering any material or its use.

Important Note:

Cellosolve® and Selexol™ are registered trademarks of Dow Chemicals Company. Skydrol® is a registered trademark of Solutia.

- Tyvek® 500, Tyvek® 600, Tyvek® 800 products manufactured before January 2023 did contain natural rubber latex which may cause allergic reactions in some sensitized individuals. Anyone who begins to exhibit an allergic response during the use of DuPont products should immediately cease using these products. The incident should also be reported to DuPont at +1 (888) 439-2988 so that an investigation can be initiated.