



FC454S GY

DuPont™ Tyvek® 400 FC

DuPont™ Tyvek® 400 FC Boot Cover with Tyvek® 400 FC Skid-Resistant Sole. 18" High. Serged Seams. Gray.

Name	Description
Full Part Number	FC454SGYxx0100yy (xx=size;yy=option code)
Fabric / Material	Tyvek® 400 FC
Design	Boot Cover
Seam	Serged
Color	Gray
Quantity/Box	100 per case
Sizes	00
Option Codes	00

FEATURES & PRODUCT DETAILS

Tyvek® 400 FC -- a DuPont™ Tyvek® protective fabric with a skid resistant friction coating. Used exclusively for shoe and boot covers and skid-resistant booties in select Tyvek® coveralls.


- 18" high boot cover with elastic top provides coverage up to calf
- Sole material composed of Tyvek® 400 FC, a special coating to provide added slip-resistance.
- One size fits most

AVAILABLE OPTIONS

Option Code	Description	Sizes	Part Number
00	Standard	00	FC454SGYxx010000

SPECIFICATIONS

- The garment shall be constructed of DuPont™ Tyvek® 400 FC -- a DuPont™ Tyvek® protective fabric with a skid resistant friction coating.
- The garment shall be gray in color.
- The garment shall be a boot cover design.
- The garment shall have serged seams.
- The garment shall have an elastic opening.
- The garment shall have a Tyvek® 400 FC upper.
- The garment shall have soles made of skid-resistant material.
- The garment shall be 18™ high.

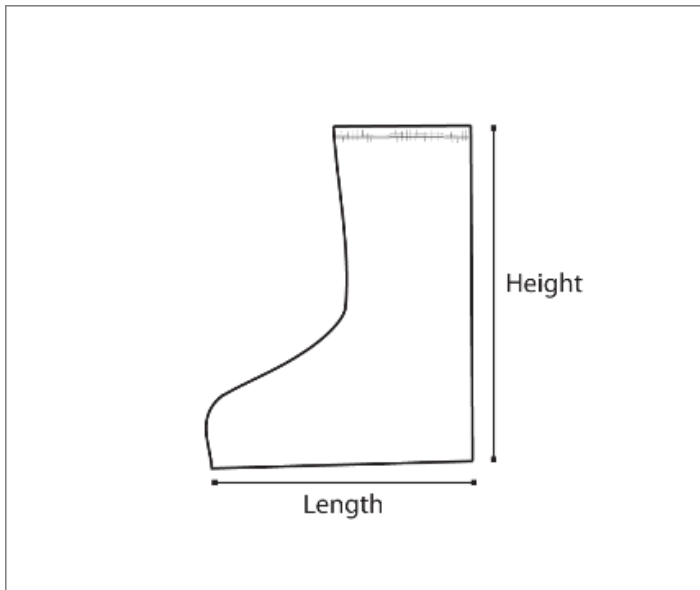

FINISHED DIMENSIONS

Size	Boot Length	Boot Height
00	16	18

ADDITIONAL EQUIPMENT NEEDED

- Wear other appropriate PPE such as, but not limited to, respiratory, eye, head, hand, and foot protection based on the hazard assessment.
- This garment only provides partial body coverage. It may be worn in combination with other chemical resistant PPE as required based on the hazard assessment.

Physical Properties



Typical results relating to mechanical performance of the fabrics used in DuPont chemical protective clothing, listed for the selected garment according to the specified respective test methods can help in the assessment of protective performance.

Property	Test Method	Typical Result
Thickness	ASTM D1117	7.4 mils
Basis Weight	ASTM D3776	1.6 oz/yd ²
Tear Resistance - Trap Tear (MD)	ASTM D5733	5 lb _f
Tear Resistance - Trap Tear (CD)	ASTM D5733	7 lb _f
Breaking Strength - Grab (MD)	ASTM D5034	20 lb _f
Breaking Strength - Grab (CD)	ASTM D5034	26 lb _f
Hydrostatic Head	AATCC 127	4.2 inches H ₂ O
Wearing Apparel Flammability	16 CFR 1610	Class 1

SPECIAL WARNINGS

- *Serged and bound seams are degraded by some hazardous liquid chemicals, such as strong acids, and should not be worn when these chemicals are present.
- *Liquid barrier performance varies based on the amount of liquid that may get on the garment, the length of time the liquid is on the garment, applied pressure and certain physical properties of the liquid. Tyvek®400, Tyvek® 400 D, ProShield®, ProShield® 10, ProShield® 60, Tyvek® 400 FC, and ProShield® 70 garments are not appropriate if during use they are getting wet (liquid is dripping or running, or it is wet to the touch) or if spotting is observed on skin or garments worn under the protective garment. Tyvek® 500 and Tyvek® 600 offer improved liquid barrier, but may not be appropriate if spotting is observed on the skin or garments worn under the protective garment. In applications where a higher liquid barrier is needed, consider Tychem® 2000 and Tychem® 4000 garments with taped seams.
- *Tyvek® 400 FC fabric was specially treated to promote ink / coating adhesion. This treatment lowers the bulk liquid holdout level below the typical level for standard Tyvek® fabric. If protection from liquid splash is required, please consider a non-treated Tyvek® style or Tychem® fabric substrate garment.
- *CAUTION: This information is based upon technical data that DuPont believes to be reliable. It is subject to revision as additional knowledge and experience are gained. DuPont makes no guarantee of results and assumes no obligation or liability in connection with this information. It is the user's responsibility to determine the nature and level of hazards and the proper personal protective equipment needed. The information set forth herein reflects laboratory performance of fabrics, not complete garments, under controlled conditions. It is intended for information use by persons having technical skill for evaluation under their specific end-use conditions, at their own discretion and risk. Anyone intending to use this information should first verify that the garment selected is suitable for the intended use. In many cases, seams and closures have shorter breakthrough times and higher penetration rates than the fabric. Please contact DuPont for specific data. These garments are intended for limited use and should be disposed of after single use. If fabric becomes torn, abraded or punctured, or if seams or closures fail, or if attached gloves, visors, etc are damaged, end user should discontinue use of garment to avoid potential exposure.