

The DuPont Separability Advisor™

Indexing Chromatographic Separations of Sugars, Sugar Alcohols, and Impurities with DuPont Resins



Introduction

Chromatography using ion exchange resins is a well-established purification process in the sweetener industry. Sweeteners separated by DuPont chromatographic separation resins include caloric sweeteners such as beet sugar and starch syrups, sugar alcohols, carbohydrate derivatives, oligosaccharides, and non-nutritive sugars. Learn how DuPont resins separate many of these sweeteners from each other and from common contaminants.

How the Separations Work

Chromatographic separation resins are supplied in two different ionic forms – potassium and calcium. Potassium-form resins (DOWEX MONOSPHERE™ 99 K/350, for example) separate sugars by size-exclusion – meaning that they allow smaller sugars to enter the resin bead, while excluding larger ones. The larger, excluded sugars travel through the resin bed faster than the smaller sugars which get slowed down by the resin beads. Salts and other ionic compounds are also ionically-excluded from the beads, purifying the sugars.

Calcium-form resins (DOWEX MONOSPHERE™ 99 Ca/220, for example) separate sweeteners by affinity to the calcium ion. Depending on the special orientation of chemical groups in the sugar, the sugar may form stronger or weaker intermolecular complexes with calcium. Sugars that form stronger complexes with calcium will move slower through the resin bed, while sugars that bind more weakly will move faster. Separation is achieved through differential affinity of the sweeteners to the calcium ion.

Sugar Separability

DuPont chromatographic separation resins were tested for their ability to separate different pairs of sweeteners, derivatives, and contaminants. This was done through pulse testing, where pulses of these different compounds were sent through a packed bed of various resins and separability was measured in terms of resolution coefficient—“R-value”. The R-value provides insight as to whether the resin has the separation power needed for effective industrial-scale chromatography. An R-value of zero means two compounds are inseparable, while an R-value of one or higher means perfect separation. Glucose-fructose separations, commonly practiced industrially in the production of high fructose corn syrup, have an R-value of 0.4.

The bubble chart in Figure 1 depicts how well various pairs of sweeteners, derivatives, and contaminants separated using DuPont resins in terms of the resolution coefficient. The entire DuPont separation resin product line, spanning different water retention capacities, ionic forms, and particle sizes, was tested for performance in Figure 1. Larger bubbles indicate higher chromatographic resolution and a more complete separation. The legend on the right side of the figure depicts what a typical chromatogram would look like at different bubble sizes. In this plot, over 82.9% of the separations tested have R-values greater than 0.4 (better than industrially-practiced glucose-fructose purification), indicating that most of the tested compound combinations can be effectively separated with DuPont resins.

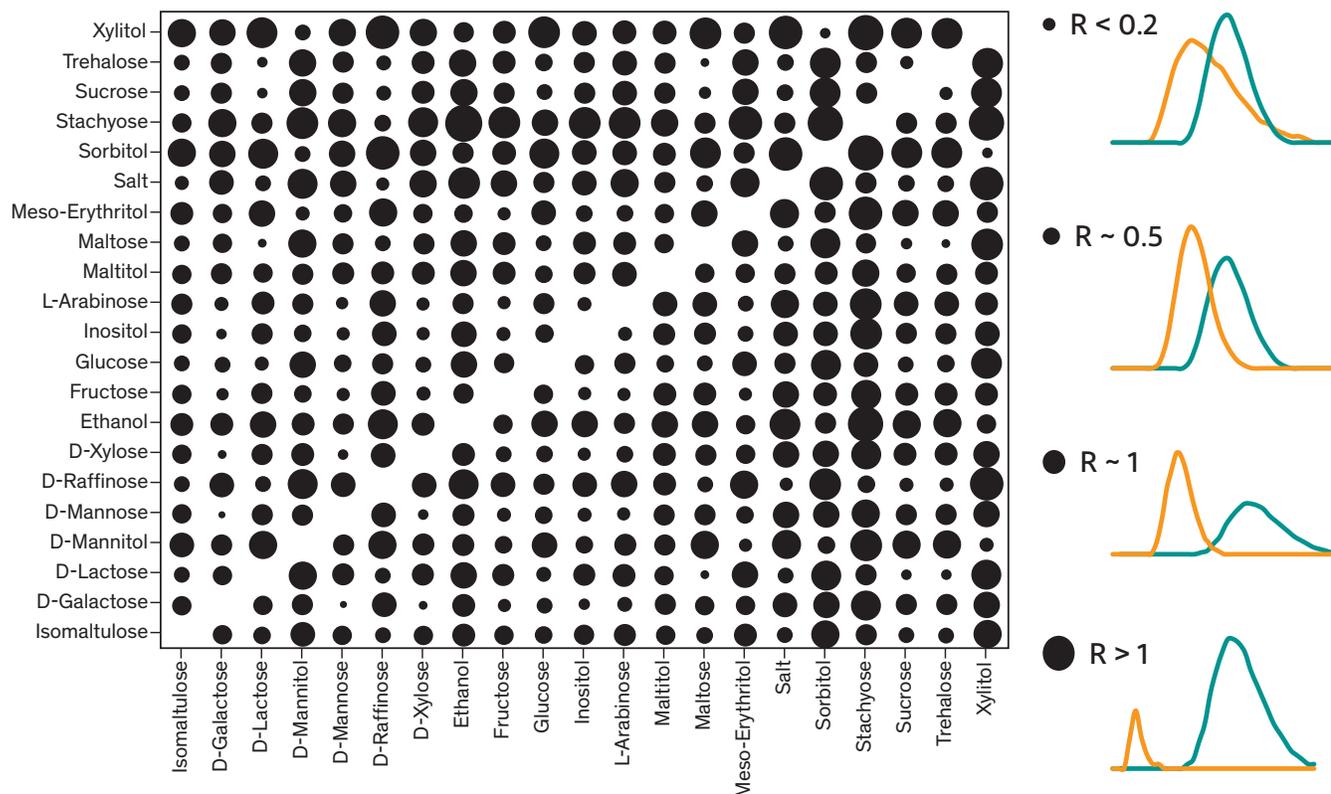


Figure 1: The DuPont Separability Advisor™ Bubble Chart for the Separation of Sugars and Sugar Alcohols

Other Considerations

Knowing the separability of your sweeteners on DuPont resins is only the first step to creating an effective, economical industrial chromatography process. Your specific process conditions, feedstocks, and goals must all be considered. Contact DuPont to discuss your purification needs, and let us help you identify the right resin for your separation. We would be pleased to use our knowledge to help you achieve your process goals.

DuPont Chromatographic Separation Resins

Table 1 below lists the DOWEX MONOSPHERE™ 99 Chromatographic Separation Resin product line. DuPont offers chromatographic separation resins with uniform particle sizes from 220 – 350 µm in diameter. The resins are offered at a variety of water retention capacities for achieving different separations and most are available in both potassium and calcium ionic forms.

Chromatographic Separation Resin	Product Features	Typical Applications	Average Particle Size (µm)	Water Retention Capacity (H)	Ionic Forms
DOWEX MONOSPHERE™ 99/350	<ul style="list-style-type: none"> Low pressure drop 	<ul style="list-style-type: none"> Beet sugar 	350	58 – 62%	K
DOWEX MONOSPHERE™ 99/320	<ul style="list-style-type: none"> Standard performance 	<ul style="list-style-type: none"> HFCS Beet sugar Dextrose 	320	58 – 61%	Ca, K
DOWEX MONOSPHERE™ 99/310	<ul style="list-style-type: none"> Reduced operating costs 	<ul style="list-style-type: none"> HFCS Polyols/Sugar alcohols Beet sugar 	310	60 – 64%	Ca, K
DOWEX MONOSPHERE™ 99/280	<ul style="list-style-type: none"> Good for difficult separations Reduced separator water usage 	<ul style="list-style-type: none"> HFCS Polyols/Sugar alcohols High-purity fructose 	280	57 – 61%	Ca, K
DOWEX MONOSPHERE™ 99/220	<ul style="list-style-type: none"> Exceptional performance in shallow-bed separators Operating cost reduction 	<ul style="list-style-type: none"> High-purity fructose Polyols/Sugar alcohols Difficult to separate and high-value sweeteners 	220	51 – 55%	Ca



DuPont System Optimization ServicesSM (SOS) – Comprehensive support for the food and beverage processing industries.

At DuPont, we are committed to doing everything possible to support our food and beverage processing customers. That's why, whenever you choose DOWEX MONOSPHERE™ Chromatographic Separation Resins, we offer expert support from our ion exchange technical service and development teams.

DuPont also offers a full range of System Optimization ServicesSM (SOS) to help you achieve exceptional performance from your resin, system and plant operations. SOS ServicesSM place our extensive knowledge and experience at your disposal. These services can complement your R&D innovation team, lighten the burden of your system start-up and staff training, and support the ongoing operation and maintenance of your system.



Contact DuPont
SOS ServicesSM



Regulatory Compliance

The resins featured here may be subject to food contact application restrictions in some countries. For country-specific food contact compliance statements, regulatory datasheets, and information on dietary rules, please contact the [DuPont Contact Center](#).

Request a Sample of DuPont Ion Exchange Products

Small orders of DuPont ion exchange resins, polymeric adsorbents, chelating resins, and copolymers can be ordered online through the Octochem website.

[Request a Sample Online](#)



DuPont has a fundamental concern for all who make, distribute, and use our products, and for the environment in which we live. This concern is the basis for our product stewardship philosophy by which we assess the safety, health, and environmental information on our products and then take appropriate steps to protect employee and public health and our environment. The success of our product stewardship program rests with each and every individual involved with DuPont products – from initial concept and research to manufacturing, selling, using, disposing, and recycling each product.

Have a question? Contact us at: dupont.com/water/contact-us



dupont.com/water

No freedom from infringement of any patent or trademark owned by DuPont or others is to be inferred. Because use conditions and applicable laws may differ from one location to another and may change with time, Customer is responsible for determining whether products and the information in this document are appropriate for Customer's use and for ensuring that Customer's workplace and disposal practices are in compliance with applicable laws and other government enactments. The product shown in this literature may not be available for sale and/or available in all geographies where DuPont is represented. The claims made may not have been approved for use in all countries. DuPont assumes no obligation or liability for the information in this document. References to "DuPont" or the "Company" mean the DuPont legal entity selling the products to Customer unless otherwise expressly noted. NO WARRANTIES ARE GIVEN; ALL IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE ARE EXPRESSLY EXCLUDED.

DuPont™, the DuPont Oval Logo, and all products, unless otherwise noted, denoted with ™, SM or © are trademarks, service marks or registered trademarks of affiliates of DuPont de Nemours, Inc. © 2019 DuPont de Nemours, Inc. All rights reserved. DOWEX MONOSPHERE™ is a trademark of The Dow Chemical Company used under license by DuPont.

Form No. 177-03658 CDP, Rev. 1
June 2019