



DuPont™ Cyrel® FAST Round EX 1450

Flexographic Sleeve Exposure Device



DuPont Packaging Graphics continues to be a global technology leader in the development and supply of flexographic printing systems. Our R&D team continues to develop innovative new solutions to help our customers expand their business by taking advantage of new and profitable opportunities in the growing flexographic packaging market. The DuPont Packaging Graphics portfolio of products includes DuPont™ Cyrel® brand photopolymer plates (analog and digital), Cyrel® platemaking equipment, Cyrel® round sleeves, Cyrel® plate mounting systems and the revolutionary Cyrel® FAST thermal system.

DuPont™ Cyrel® Systems: Higher quality at high speed.

The DuPont™ Cyrel® FAST Round EX 1450 is designed with customer needs in mind; it is easy to install, support, maintain and operate. It is robust, extremely cost effective and reliable.

DuPont™ Cyrel® FAST Round EX 1450

Benefits

- Maximum sleeve size 57" x 39" (1,450 x 1,000)
- Extremely rapid access time
- Smaller environmental footprint
- High-quality precision printing
- Higher durability for long print runs
- Robust and easy to support
- Optimum productivity
- Small equipment footprint

Product Features


DuPont™ Cyrel® FAST Round EX 1450 is a high productive flexographic sleeve exposure device which complements the Cyrel® FAST round system.

The Cyrel® FAST Round EX 1450 exposes a FAST round seamless photopolymer sleeve in less than 10 minutes independent of sleeve size.

Due to its vertical design and a high level of automation, the Cyrel® FAST Round EX 1450 is very operator friendly. Sleeve handling is easy since special tools are not required for fixation. Another benefit of the remarkable design is the small space requirement.

The technology enhances the production of high quality sleeves quickly, by combining the efficiency and speed of digital sleeve imaging with the productivity and environmental benefits of dry, thermal sleeve processing.

The digital sleeves for DuPont's thermal sleeve making process are designed to meet the needs of high quality plates with fine halftone, line-work and solids.

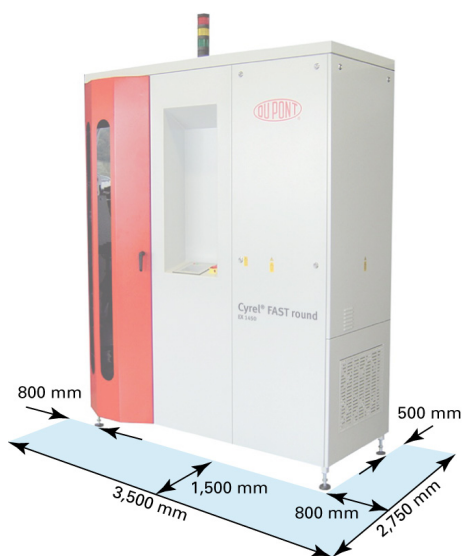

Floor Plan



Download latest version



DuPont™ Cyrel® FAST Round EX 1450

Flexographic Sleeve Exposure Device

Technical Data			
General	Details	Other Notes	
Equipment Name	DuPont™ Cyrel® FAST Round EX 1450	Flexographic Sleeve Exposure Device	
SAP Article Number	D14466727		
Max. Nominal Sleeve Width	57" (1,450 mm)		
Min. Nominal Sleeve Width	11.8" (300 mm)		
Max. Nominal Sleeve Repeat	39.3" (1,000 mm)		
Min. Nominal Sleeve Repeat	12.9" (330 mm)		
Sleeve Thickness	Thin 1,573 mm / Classic 3,165 mm		
Electrical (Field Configurable)	400 V ~ 3 / N / PE / 50/60 Hz		
Power (Nominal)	4 kW		
Current (Nominal Load)	7.5 A		
Grounding	16 mm ² connection on frame		
Exhaust	Ø 3.94" (100 mm)	max. 150 m ³ / h	
Environmental Data	Temperature range: 65°F to 80°F (18°C to 27°C)	Relative humidity from 20% to 80% non-condensing	
Compressed Air Supply			
Dimensions	Uncrated	Crated	
	L	74.8" (1,900 mm)	88.19" (2,240 mm)
	D	32.2" (818 mm)	47.24" (1,200 mm)
	H	89.65" (2,277 mm)	100" (2,540 mm)
Weight	1,102 lbs (500 kg)	1,918 lbs (870 kg)	
Color	DuPont Grey & DuPont Red		

For more information on DuPont™ Cyrel® or other DuPont Packaging Graphics products, please contact your local representative:

United States

DuPont Packaging Graphics
Chestnut Run Plaza, Bldg. 702
974 Centre Road
Wilmington, DE 19805
800-345-9999

Canada

DuPont Packaging Graphics
1919 Minnesota Court
Mississauga, ON L5N 0C9
Canada
905-816-3238

www.cyrel.com/na

© 2013 DuPont. All rights reserved. The DuPont Oval Logo, DuPont™ and Cyrel® are registered trademarks or trademarks of E.I. du Pont de Nemours and Company or its affiliates. All technical information set out herein is provided free of charge and is based on technical data, which DuPont believes to be reliable. It is intended for use by persons having skill, at their own discretion and risk. The handling precaution information contained herein is given with the understanding that those using it will satisfy themselves that their particular conditions of use present no health or safety hazards. Since conditions of product use are outside of our control we make no warranties express or implied in relation thereto and therefore cannot accept any liability in connection with any use of this information. Nothing herein is to be taken as a license to operate under, or a recommendation to infringe any patents.