

DuPont™ Kalrez® Spectrum™ 0040 Perfluoroelastomer Parts


O-Rings for mechanical seals in oil refineries

Oil refineries transform and refine crude oil into a variety of products and are often located in regions with very cold climates. This added complexity requires that equipment and materials used in these processes are not only resistant to hydrocarbons, but are also capable of maintaining high-performance and sufficient sealing at very low temperatures. Kalrez® Spectrum™ 0040 perfluoroelastomer parts have been formulated to meet these demanding requirements for mechanical seals designed to operate in extreme conditions.

- **Chemicals and cleaning:** Hydrocarbons
- **Process conditions:** Outside temperature cycles from -48 °C to +15 °C and back to -48 °C in a 24-hour period
- **Incumbent solution:** PTFE encapsulated silicone O-Rings
- **Performance challenge:** Insufficient lifetime
Mean Time Between Repair (MTBR): 1 week

Kalrez® Spectrum™ 0040 performance:

- O-Rings allowed the mechanical seals to be operated continuously with outside temperature oscillating between -48 °C and +15 °C
- MTBR was extended from 1 week to 6 months (24x longer), leading to significant costs reduction and higher productivity

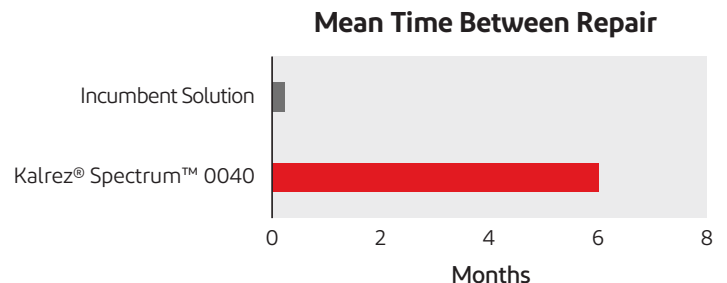

The performance is based on tests performed by the customer. This data should not be used to establish specification limits.

Visit us at [kalrez.com](https://www.kalrez.com)

The information set forth herein is furnished free of charge, is based on technical data that DuPont believes to be reliable and represents typical values that fall within the normal range of properties. This information relates only to the specific material designated and may not be valid for such material used in combination with other materials or in other processes. It is intended for use by persons having technical skill, at their own discretion and risk. This information should not be used to establish specification limits nor used alone as the basis of design. Handling precaution information is given with the understanding that those using it will satisfy themselves that their conditions of use present no health or safety hazards and comply with applicable law. Since conditions of product use and disposal are outside our control, we make no warranties, express or implied, and assume no liability in connection with any use of this information. As with any product, evaluation under end use conditions prior to specification is essential. Nothing herein is to be taken as a license to operate or a recommendation to infringe on patents.

CAUTION: Do not use DuPont materials in medical applications involving implantation in the human body or contact with internal body fluids or tissues unless the material has been provided from DuPont under a written contract that is consistent with the DuPont policy regarding medical applications and expressly acknowledges the contemplated use. For further information, please contact your DuPont representative.

DuPont's sole warranty is that our products will meet our standard sales specifications in effect at the time of shipment. Your exclusive remedy for breach of such warranty is limited to refund of purchase price or replacement of any product shown to be other than as warranted. TO THE FULLEST EXTENT PERMITTED BY APPLICABLE LAW, DUPONT SPECIFICALLY DISCLAIMS ANY OTHER EXPRESS OR IMPLIED WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, OR NON-INFRINGEMENT. DUPONT DISCLAIMS LIABILITY FOR ANY SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES.

DuPont™, the DuPont Oval Logo, and all trademarks and service marks denoted with ™, ® or © are owned by affiliates of DuPont de Nemours, Inc. unless otherwise noted. © 2023 DuPont. All rights reserved.

(02/2023) Reference: KZE-A40136-00-A0223 CDP