




PRODUCT INFORMATION

DuPont™ Tychem® 6000 Coverall. Respirator Fit Hood. Elastic Wrists and Ankles. Double Storm Flap. Taped Seams. Gray.

ATTRIBUTES


Full Part Number	TF145TGYxx0006yy (xx=size;yy=option code) ?
Fabric/Materials	Tychem® 6000
Design	Coverall w/ Resp. Fit Hood, Elastic Wrists and Ankles
Seam	Taped
Color	Gray
Quantity/Box	6 per case
Sizes	SM, MD, LG, XL, 2X, 3X, 4X, 5X, 6X, 7X
Option Codes	00,TV

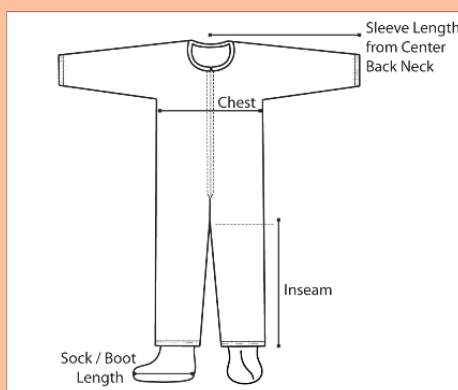

SIZE TABLE

SIZE	SLEEVE LENGTH	CHEST WIDTH	INSEAM	FITS CHEST	FITS HEIGHT
SM	33 3/4	22	31	30 3/4 - 34 1/4	5'0" - 5'7"
MD	34 1/2	24	32	34 3/4 - 38 1/4	5'3" - 5'7"
LG	36 1/2	26	32 1/2	38 3/4 - 42 1/4	5'5" - 5'9"
XL	37 1/2	28	33	42 3/4 - 46 1/4	5'8" - 6'2"
2X	38 1/4	30	33 1/4	46 3/4 - 50 1/4	6'0" - 6'4"
3X	38 3/4	32	33 1/2	50 3/4 - 54 1/4	6'2" - 6'4"
4X	39 1/2	34	34	54 3/4 - 58 1/4	6'4" - 6'7"
5X	40 1/4	36	34 1/4	58 3/4 - 62 1/4	6'7" - 6'10"
6X	40 3/4	38	34 3/4	62 3/4 - 66 1/4	6'9" - 7'1"
7X	41 1/4	40 1/4	35 3/4	67 1/4 - 70 3/4	7'0" - 7'4"

PHYSICAL PROPERTIES

PROPERTY	TEST METHOD	TYPICAL RESULT
Basis Weight	ASTM D3776	3.5 oz/yd ²
Burst Strength - Ball	ASTM D3787	55 lb _f
Tear Resistance - Trap Tear (MD)	ASTM D5733	8 lb _f
Tear Resistance - Trap Tear (CD)	ASTM D5733	7 lb _f
Breaking Strength - Grab (MD)	ASTM D751	63 lb _f
Breaking Strength - Grab (CD)	ASTM D751	69 lb _f
Puncture, Propagation, Tear Resistance (MD)	ASTM D2582	9 lb _f
Puncture, Propagation, Tear Resistance (CD)	ASTM D2582	7 lb _f
Wearing Apparel Flammability	16 CFR 1610 	Class 1

WARNING

*CAUTION: This information is based upon technical data that DuPont believes to be reliable. It is subject to revision as additional knowledge and experience are gained. DuPont makes no guarantee of results and assumes no obligation or liability in connection with this information. It is the user's responsibility to determine the level of toxicity and the proper personal protective equipment needed. The information set forth herein reflects laboratory performance of fabrics, not complete garments, under controlled conditions. It is intended for informational use by persons having technical skill for evaluation under their specific end-use conditions, at their own discretion and risk. Anyone intending to use this information should first verify that the garment selected is suitable for the intended use. In many cases, seams and closures have shorter breakthrough times and higher permeation rates than the fabric. Please contact DuPont for specific data. If fabric becomes torn, abraded or punctured, or if seams or closures fail, or if attached gloves, visors, etc. are damaged, end user should discontinue use of garment to avoid potential exposure to chemical. Since conditions of use are outside our control, we make no warranties, express or implied, including, without limitation, no warranties of merchantability or fitness for a particular use and assume no liability in connection with any use of this information. This information is not intended as a license to operate under or a recommendation to infringe any patent or technical information of DuPont or others covering any material or its use.

Cellosolve® and Selexol™ are registered trademarks of Dow Chemicals Company. Skydrol® is a registered trademark of Solutia.

DuPont™ SafeSPEC™ - We're here to help

Our powerful web-based tool can assist you with finding the appropriate DuPont garments for chemical, controlled environment, thermal and mechanical hazards.



**DuPont Personal Protection
SafeSPEC™**

 [DuPont Personal Protection](#)

 [@DuPontPPE](#)

 [DuPont Personal Protection](#)

CREATED ON: NOVEMBER 14, 2022

© 2022 DuPont. All rights reserved. DuPont™, the DuPont Oval Logo, and all trademarks and service marks denoted with ™, SM or ® are owned by affiliates of DuPont de Nemours, Inc. unless otherwise noted.