



WATER TREATMENT AT POWER PLANT

Radioactive Waste Treatment and Decommissioning Product Recommendations

Ion exchange resins are an efficient and simple way to purify waste streams and concentrate radioisotopes on a solid substrate before treated liquid is released to the environment or recycled to the nuclear circuits. In certain cases reverse osmosis membranes can be used to upconcentrate the radioactive stream and thus reduce the amount of liquid waste requiring treatment. During decommissioning operations, which mainly occur under water, ion exchange resins are used to purify decommissioning units to increase visibility and remove contaminants, as well as treat effluent when the decommissioning pool is emptied.

TECHNOLOGY	PRODUCT	APPLICATION	FEATURES AND RECOMMENDED USES	TYPE	MATRIX	MINIMUM TOTAL VOLUME CAPACITY (eq/L)	IONIC FORM AS SHIPPED
ION EXCHANGE RESINS	AMBERLITE™ IRN99 H	Rad Waste Treatment	Premium 16% DVB uniform particle size cation resin with very high capacity and oxidative stability. Highest selectivity for cationic radioisotopes and highest total capacity for long runs resulting in reduced waste and exposure.	SAC	GEL	2.50	H ⁺
	AMBERLITE™ IRN78 OH	Rad Waste Treatment	Premium high solid uniform particle size anion resin with very high capacity used for removal of anionic radioisotopes.	SBA	GEL	1.20	OH ⁻
	AMBERLITE™ IRN9766 OH	Rad Waste Treatment	Macroporous anion resin designed to remove radioactive colloidal material in all nuclear applications. Often used as an overlay above a mixed bed or a cation resin.	SBA	MACRO	0.85	OH ⁻
	AMBERLITE™ IRN9652 H	Rad Waste Treatment	Macroporous high capacity cation resin with high affinity for heavy metals & 137Cs	SAC	MACRO	1.95	H ⁺
	AMBERLITE™ IRN9675 H	Rad Waste Treatment	Nuclear grade macroporous cation resin designed to remove radioactive colloidal material in all nuclear applications. Often used as an overlay above a mixed bed.	SAC	MACRO	1.70	H ⁺
	AMBERLITE™ IRN160 H/OH	Rad Waste & Decommissioning	High capacity nuclear grade mixed bed composed of uniform particle size AMBERLITE™ IRN97 H and IRN78 OH Resins on a 1:1 equivalent basis. Designed to minimize separation of anion and cation during installation and transfer.	MB	GEL/GEL	2.10/1.20	H ⁺ /OH ⁻
	AMBERLITE™ IRN170 H/OH	Rad Waste & Decommissioning	Premium nuclear grade mixed bed composed of uniform particle size AMBERLITE™ IRN99 H and IRN78 OH Resins on a 1:1 equivalent basis. Highest Selectivity for radioisotopes and highest total capacity for long resin life resulting in reduced waste and exposure.	MB	GEL/GEL	2.50/1.20	H ⁺ /OH ⁻
	AMBERLITE™ IRN9882 H/OH	Rad Waste & Decommissioning	Nuclear grade macroporous mixed bed composed of 40% cation resin (12%DVB) and 60% AMBERLITE™ IRN9766 Resin on a volume basis. Offers high exchange kinetics and the ability to remove colloids for highest decontamination rates.	MB	MACRO/MACRO	1.65/0.85	H ⁺ /OH ⁻
REVERSE OSMOSIS	DOW FILMTEC™ Elements	Rad Waste & Decommissioning	Please contact your Dow representative for assistance.	N/A	N/A	N/A	N/A

Key:

- SBA = Strong Base Anion
- SAC = Strong Acid Cation
- MB = Mixed Bed
- Chel. = Chelating resin

Powering performance worldwide.

With a large global manufacturing footprint, strong R&D expertise and technical support services and systems, we supply high market volumes with high quality. Dow partners with you, our customer, to understand unmet needs and develop tailored solutions.

● RESEARCH & DEVELOPMENT

Chauny, France*
Collegetown, PA*
Edina, MN*
Huzhou, China
Kaust Jeddah, KSA
Midland, MI*
Shanghai, China*
Tarragona, Spain**


*DW&PS Technology Center
**Global Water Technology Center

● COMMERCIAL OPERATIONS

Astana, Kazakhstan
Bangkok, Thailand
Budapest, Hungary
Dubai, UAE
Horgen, Switzerland
Johannesburg, South Africa
Kuala Lumpur, Malaysia
Moscow, Russia
Mumbai, India
Nairobi, Kenya
Rheinmünster, Germany
São Paulo, Brazil
Seoul, Korea
Sydney, Australia
Tokyo, Japan
Warsaw, Poland

● MANUFACTURING

Chauny, France
Edina, MN
Fombio, Italy
Huzhou, China
Jubail Industry City, Saudi Arabia
Menlo Park, CA
Midland, MI
Qingpu, China
Soma, Japan

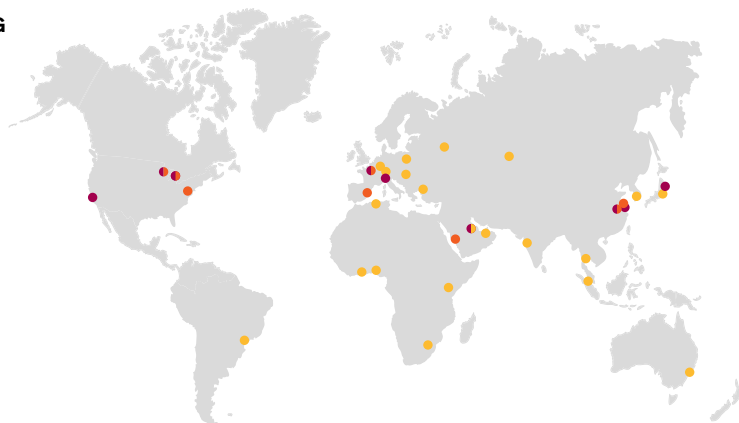

Water & Process Solutions

7600 Metro Blvd.
Edina, MN 55439

For more information, contact our Customer Information Group:

Asia Pacific	+86 21 3851 4988
Europe, Middle East, Africa	+31 115 672626
Latin America	+55 11 5184 8722
North America	1-800-447-4369

dowwaterandprocess.com

WARNING: Oxidizing agents such as nitric acid attack organic ion exchange resins under certain conditions. This could lead to anything from slight resin degradation to a violent exothermic reaction (explosion). Before using strong oxidizing agents, consult sources knowledgeable in handling such materials.

NOTICE: No freedom from infringement of any patent owned by Dow or others is to be inferred. Because use conditions and applicable laws may differ from one location to another and may change with time, Customer is responsible for determining whether products and the information in this document are appropriate for Customer's use and for ensuring that Customer's workplace and disposal practices are in compliance with applicable laws and other government enactments. The product shown in this literature may not be available for sale and/or available in all geographies where Dow is represented. The claims made may not have been approved for use in all countries. Dow assumes no obligation or liability for the information in this document. References to "Dow" or the "Company" mean the Dow legal entity selling the products to Customer unless otherwise expressly noted. NO WARRANTIES ARE GIVEN EXCEPT FOR ANY SPECIFIC WARRANTY SET FORTH HEREIN; ALL IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE ARE EXPRESSLY EXCLUDED.

All information set forth herein is for informational purposes only. This information is general information and may differ from that based on actual conditions. Please note that physical properties may vary depending on certain conditions and while operating conditions stated in this document are intended to lengthen product lifespan and/or improve product performance, it will ultimately depend on actual circumstances and is in no event a guarantee of achieving any specific results. Nothing in this document should be treated as a warranty by Dow.

Printed in the U.S.A.

©™ Trademark of The Dow Chemical Company ("Dow") or an affiliated company of Dow

Form No. 177-03677-0518 CDP